[INCH−POUND]
A−A−55563/31
31 March 2023

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

HOLDER, ELECTRICAL CARD, METAL CARD GUIDE, OFFSET MOUNTING, WITH MULTIPLE MOUNTING HOLES, UNSUPPORTED, FOR CHASSIS OR SHEET METAL APPLICATIONS, WITH RIGID (RIGHT HAND SIDE) WALL SUPPORT

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

The complete requirements for procuring electrical card holders described herein shall consist of this document and the latest issue in effect of A−A−55563.

CLASSIFICATION/PART IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see notes).

AA55563	/31	@	#	$ $	&
CID number	Applicable CID sheet	Material	Card holder width/board thickness (see table I)	Length (see table II)	Finish See table III)

Example: AA55563/31ESA2G is the PIN for a passivated stainless steel (of temper TF00), 10.25 inches (260.4) long card guide. The card guide is designed to accommodate circuit card assemblies with printed board thicknesses of .063 inch (1.6 mm) and has 11 mounting holes.

SALIENT CHARACTERISTICS.

Interface and physical dimensions. The card holders supplied to this CID specification sheet shall be as specified herein (see table I and table II) and meet the general requirements specified in CID A−A−55563.

Material type. The materials types shall be as defined in A−A−55563 and herein. The applicable material type designators for this CID specification sheet are "Y" (beryllium copper) and "E" (stainless steel). Beryllium copper shall be of copper alloy number C17500, temper TF00 (also designated AT) in accordance with ASTM B534, SAE AS81021, or equivalent. Stainless steel shall be type 301, condition ½ H or equivalent.

Material thickness. The material thickness shall be .016 ±.002 inch (0.41 ±0.05 mm).

Card holder width/board thickness. The card holder width/board thickness shall be defined in table I herein and is shown on figure 1 as dimension "B". The applicable card holder width/board thickness designators for this CID specification sheet are "S" or "N".


Overall length. Overall length is shown on figure 1 as dimension "L" and is displayed in table II herein. Applicable overall length designator "12", "22", "32", "42", "52", "62", "72", "82", "92", "A2", "B2", or "C2" shall be included in the PIN.

AMSC N/A
FSC 5998
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

Finish. Finish materials types shall be defined in A-A-55563 and herein. The applicable finish materials designators for material type designator "Y" (beryllium copper) are "K" (no finish), "F" (electrodeposited nickel), "N" (electroless nickel), or "R" (clear electrodeposited zinc). The only finish material designator for material type designator "E" (stainless steel) is "G" (passivate). The finish designator shall be included in the PIN.

Mounting holes. The card guide will have the number of equal to the whole number of its length plus 1. Example: the 4.25 inch (108.0) long card guide shown in figure 1 has 5 mounting holes (4 from its length plus 1).

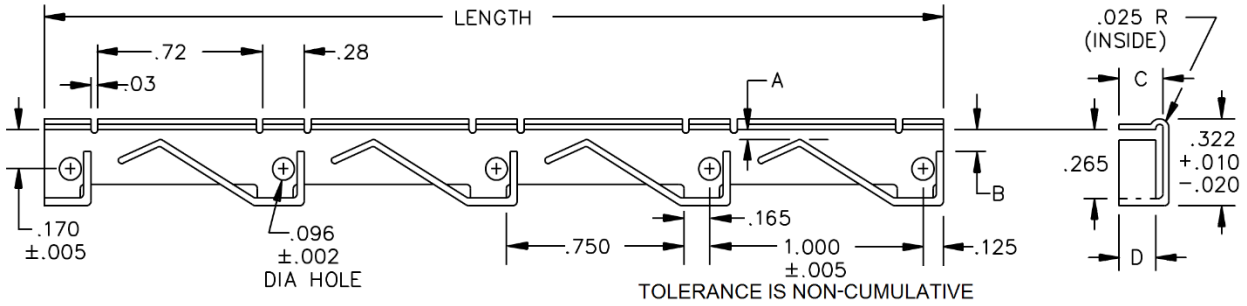

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.002	0.05	.025	0.64	.125	3.18	.322	8.18
.005	0.13	.028	0.711	.165	4.19	.72	18.29
.015	0.38	.03	0.76	.170	4.32	.750	19.05
.02	0.51	.096	2.43	.28	7.11	1.00	25.40

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. See table I for dimensions A, B, C and D.

FIGURE 1. Card holder design and dimensions for configuration A.

TABLE I. Card holder dimensions. 1/ 2/

PIN designators for card holder material and width/ board thickness	CCA printed board thickness		Dimension "A" gap thickness 3/		Dimension "B" PWB thickness 4/		Dimension "C"		Dimension "D"	
	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm
ES	.063	1.6	.045	1.14	.075	1.91	.125	3.16	.100	2.54
EN	.094	2.4	.075	1.91	.105	2.67	.125	3.16	.100	2.54
YS	.063	1.6	.045	1.14	.075	1.91	.165	4.19	.140	3.56
YN	.094	2.4	.075	1.91	.105	2.67	.165	4.19	.140	3.56

1/ Dimensions are in inches. Millimeter equivalents are given for general information only.
2/ Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3/ Tolerances for gap thickness are +.00 inch, −.03 inch (+0.0 mm, −0.8 mm).
4/ Tolerances for PWB thickness are +.015 inch, −.00 inch (+0.38 mm, −0.0 mm).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.


TABLE II. Length and number of mounting holes. 1/

PIN designator for overall length	Dimension "L" ±.020 (0.51)		Number of mounting holes
	Inches	mm	
12	1.25	31.8	2
22	2.25	57.2	3
32	3.25	82.6	4
42	4.25	108.0	5
52	5.25	133.4	6
62	6.25	158.8	7
72	7.25	184.2	8
82	8.25	209.6	9
92	9.25	235.0	10
A2	10.25	260.4	11
B2	11.25	285.8	12
C2	12.25	311.2	13

1/ Dimensions are in inches. Millimeters are given for information only.

APPLICATION DATA

Mounting and usage. Two card guides are recommended for each CCA. See figure 2 for recommended card guide to mounting surface dimensions. Stainless steel card guides provides a solution for shock and vibration, whereas beryllium copper card guides also provide excellent heat sinking and grounding properties.

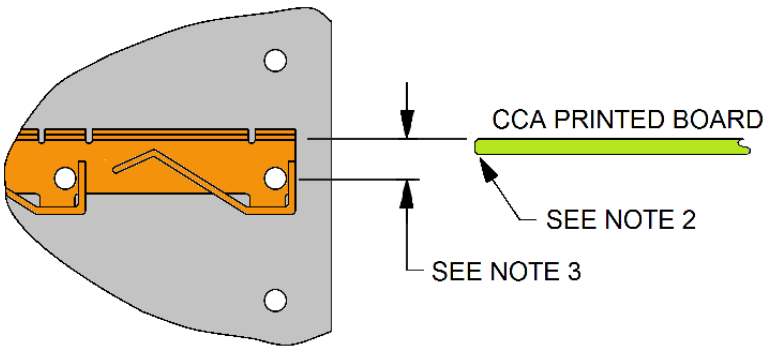

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Chamfer any sharp edges of the CCA printed board to ensure ease of insertion through the card guide into installed position.
3. Recommended mounting dimensions is .170 inch ±.005 inch (4.32 mm ±0.13 mm).

FIGURE 2. Card holder mounting and usage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of documents.

Commercial Item Description

A−A−55563 − Holder, Electrical Card, Metal Card Guide, General Requirements For.

(Copies of these documents are available online at https://quicksearch.dla.mil.)

ASTM INTERNATIONAL (ASTM)

ASTM B534 − Standard Specification for Copper-Cobalt-Beryllium Alloy and Copper-Nickel-Beryllium Alloy Plate, Sheet, Strip, and Rolled Bar.

(Copies of these documents are available online at https://www.astm.org.)

SAE INTERNATIONAL (SAE)

SAE AS81021 − Copper-Beryllium Alloy (Copper Alloy Numbers C17500 and C17510), Strip.

(Copies of these documents are available online at https://www.sae.org.)

(Non-Government Standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

Ordering data. Ordering data shall be as specified in A−A−55563.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Manufacturer CAGE	Manufacturer name and address	Manufacturer contact information
61081	Schroff, Inc. 7328 Trade Street San Diego, CA 92121−3410	Telephone: (858) 740−2400 Facsimile: (858) 740−2430 E mail: askschroff@nVent.com URL: https://schroff.nvent.com

Part number (P/N) supersession data. These CID specification sheet PINs supersedes the following manufacturer's P/Ns as shown in table III. The CID PINs listed in table III cover the different lengths available. This information is being provided to assist in reducing proliferation in the Government inventory system.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial P/N supersession data.

CID PIN; AA55563/31@#$$& 1/				Manufacturers 2/	
Material type (@)	Card holder width/board thickness	Overall length ($$)	Finish (&)	CAGE 61081 4/	
E	S	12	G	125-06-1.25	
E	S	22	G	125-06-2.25	
E	S	32	G	125-06-3.25	
E	S	42	G	125-06-4.25	
E	S	52	G	125-06-5.25	
E	S	62	G	125-06-6.25	
E	S	72	G	125-06-7.25	
E	S	82	G	125-06-8.25	
E	S	92	G	125-06-9.25	
E	S	A2	G	125-06-10.25	
E	S	B2	G	125-06-11.25	
E	S	C2	G	125-06-12.25	
E	N	12	G	125-09-1.25	
E	N	22	G	125-09-2.25	
E	N	32	G	125-09-3.25	
E	N	42	G	125-09-4.25	
E	N	52	G	125-09-5.25	
E	N	62	G	125-09-6.25	
E	N	72	G	125-09-7.25	
E	N	82	G	125-09-8.25	
E	N	92	G	125-09-9.25	
E	N	A2	G	125-09-10.25	
E	N	B2	G	125-09-11.25	
E	N	C2	G	125-09-12.25	
Y	S	12	3/	165-06-1.25	
Y	S	22	3/	165-06-2.25	
Y	S	32	3/	165-06-3.25	
Y	S	42	3/	165-06-4.25	
Y	S	52	3/	165-06-5.25	
Y	S	62	3/	165-06-6.25	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial P/N supersession data - Continued.

CID PIN; AA55563/31@#$$& 1/				Manufacturers 2/	
Material type (@)	Card holder width/board thickness	Overall length ($$)	Finish (&)	CAGE 61081 4/	
Y	S	72	3/	165-06-7.25	
Y	S	82	3/	165-06-8.25	
Y	S	92	3/	165-06-9.25	
Y	S	A2	3/	165-06-10.25	
Y	S	B2	3/	165-06-11.25	
Y	S	C2	3/	165-06-12.25	
Y	N	12	3/	165-09-1.25	
Y	N	22	3/	165-09-2.25	
Y	N	32	3/	165-09-3.25	
Y	N	42	3/	165-09-4.25	
Y	N	52	3/	165-09-5.25	
Y	N	62	3/	165-09-6.25	
Y	N	72	3/	165-09-7.25	
Y	N	82	3/	165-09-8.25	
Y	N	92	3/	165-09-9.25	
Y	N	A2	3/	165-09-10.25	
Y	N	B2	3/	165-09-11.25	
Y	N	C2	3/	165-09-12.25	

1/ The at sign (@) denotes material type, pound sign (#) denotes card holder width/board thickness, dimension "B" (see figure 1 herein), dollar signs ($$) denotes overall length dimension "L" (see figure 1 herein and A-A-55563) and the ampersand (&) denotes finish.

2/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PINs shown. For actual part marking requirements, see the marking paragraph of A-A-55563.

3/ Finish materials designator "F", "K", "N", or "R" are available for this material type (see finish for a description of the designators).

4/ Manufacturer CAGE 61081 available finishes use designators "F", "K", "N" and "R".

Guidance on use of alternative parts with less hazardous or non-hazardous materials. This CID specification sheet provides for a number of alternative plating materials via the PIN. Users should select the PIN with the least hazardous material that meets the form, fit, and function requirements of their application.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army − CR
Navy − EC
Air Force − 85
DLA − CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA − FAS

Preparing activity:
DLA − CC

Project 5998−2023−015

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.