INCH-POUND

A-A-59129
October 3, 1997

COMMERCIAL ITEM DESCRIPTION

CRUSHER, CAN

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE.

1.1 Scope. This commercial item description (CID) covers a manually operated can crusher.

1.2 Intended use. The can crusher is intended to crush round food cans. The types I, II, and III crushers are used for crushing all round cans up to and including No. 10 cans.

2. CLASSIFICATION

2.1 Classification. The can crushers shall be of the following types as specified (see 7.1).

Type I - Table mounted

Type II - Mobile Kitchen Trailer (MKT)- mounted

Type III - High Mobility Multi-Wheel Vehicle (HMMWV)- mounted

3. SALIENT CHARACTERISTICS

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5018 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 7330

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:04Z
Check the source to verify that this is the current version before use.

3.2 Design. The crusher shall be hand-operated by means of a lever. The force required to crush cans up to and including No. 10 round shall not exceed 100 lbs. The handle shall have rounded surfaces to provide comfortable operation. The crusher shall flatten No. 10 and smaller sizes of cans and reduce volume by 80 percent when performance tested as specified in 5.4.1. The crusher shall allow a crushed can to fall freely from the unit. The crusher shall have a maximum weight of 65 lbs, and maximum outside dimensions as shown in figure 1. The crusher shall show no evidence of breaking, parts separation, or permanent deformation when load tested as specified in 5.4.2.

3.2.1 Type I crusher. Type I crusher shall be supplied with appropriate hardware to mount to a work table, such that the compacting action of the crusher does not disturb or destabilize the table.

3.2.2 Type II crusher. Type II crusher shall have an adapter mount (Government unique requirement, see 7.4) constructed of the same material as the crusher, and as specified on figure 2, and fastened onto the bottom of the crusher (see figure 3). The type II crusher shall be secured onto the hitch yoke of the Mobile Kitchen Trailer (MKT) as specified on figure 3.

3.2.3 Type III crusher. Type III crusher shall have a bracket mount (Government unique requirement, see 7.4) constructed of the same material as the crusher, and welded onto the back side of the crusher as shown on figure 4. The type III crusher shall be secured onto the tailgate of the High Mobility Multi-Wheel Vehicle (HMMWV) as shown on figure 5.

3.3 Cover ("Government unique" requirement see 7.4). Each can crusher shall be equipped with a cover guard. The cover guard shall be constructed to shield the opening of the crusher from the weather elements. The cover guard shall not include the handle assembly. The cover guard shall incorporate means for quick removal prior to use, and also a means to keep it attached to (and away from) the crusher when being used. The cover guard shall be water-resistant, and withstand temperatures of -25^{0}F to 120^{0}F.

3.4 Workmanship. The finished crushers shall be clean and free of rust, slivers, die marks, deformities, and fractures. All sharp edges and corners shall be removed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:04Z
Check the source to verify that this is the current version before use.

3.4.1 Welds. Welds shall be sound, smooth, and free from pits, fractures, burn through, or fissures. All scale or flux shall be removed. Spot welds shall be free of flashes.

3.4.2 Threaded fasteners. Threaded fasteners shall be drawn tight and shall not be stripped or cross-threaded. Washers, lockwashers, and bushings shall be provided where required in accordance with standard commercial practice.

3.5 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of IEEE/ASTM SI 10, and all other requirements of this CID are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

4. REGULATORY REQUIREMENTS

4.1 Contractor recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description and (except for any government unique requirements specified) shall conform to the producer’s own drawings, specifications, standards, and quality assurance practices, and is the same product offered for sale in the commercial marketplace or is the same product that has successfully been delivered to the Government on a previous contract or purchase order. The Government reserves the right to require proof of such conformance prior to first delivery, and thereafter, as may be otherwise provided under the provisions of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:04Z
Check the source to verify that this is the current version before use.

5.2 Market acceptability criteria. No item of equipment offered under this CID shall be acceptable unless the manufacturer has sold equipment of the same size (similar capacity) and type in a commercial environment for a minimum period of one year with the exception of “Government unique requirements”. The sales results shall be statistically supported and sales data shall accompany bid proposals. Equipment installed for test purposes in a manufacturer’s plant or test laboratory shall not be considered as complying with this requirement.

5.3 Warranty. Unless otherwise specified in the contract, the manufacturer's standard commercial warranty shall apply.

5.4 Performance and load tests. All cans specified in the following paragraphs shall comply with PPP-C-96.

5.4.1 Performance test. Prior to testing, the initial volume of each can shall be measured. The final volume after crushing for each can shall be measured for compliance with the volume reduction requirement of 3.2.

5.4.2 Load test. The crusher shall be secured in a holding device, and used to crush ten No. 10 round cans that are opened at one end. The crusher shall then be examined to determine compliance with the parts separation, breaking, and permanent deformation requirements of 3.2.

6. PACKAGING

6.1 Packaging. Preservation, packing and marking requirements shall be as specified in the contract or purchase order (see 7.1).

7. NOTES

7.1 Ordering Data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents (if applicable).

a. Title, number and date of this document.
b. Type required (see 2.1)
c. Packaging requirements (see 6.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:04Z
Check the source to verify that this is the current version before use.

7.2 Sources of documents.

7.2.1 Sources of government documents.

FEDERAL SPECIFICATION

PPP-C-96 - Cans, Metal, 28 Gauge and lighter

Copies of this federal document are available from:

Standardization Documents Order Desk
Building No.4, Section D
700 Robbins Avenue
Philadelphia, PA 19111-5094.

7.2.2 Sources for non-government association documents.

IEEE/ASTM STANDARD

SI 10 - Standard for Use of the International System of Units (SI): The Modern Metric System

(Application for copies of the IEEE/ASTM standard should be addressed to the Institute of Electrical and Electronics Engineers, Inc., 345 East 47th Street, New York, NY 10017, or the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428).


7.3 Sources of supply. A manufacturer whose product is known to meet the requirements of this CID is listed below; however, competition is not limited to this company.

Edlund Co.
159 Industrial Parkway
Burlington, VT 05401

7.4 “Government unique” requirement. Whenever a “Government unique” requirement is included in a paragraph under “Salient characteristics”, it is meant that the requirement is something that is not normally offered to the commercial marketplace by the manufacturer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:04Z
Check the source to verify that this is the current version before use.

7.5 Part identification number(PIN). The PINs to be used for items required by this CID are created as follows:

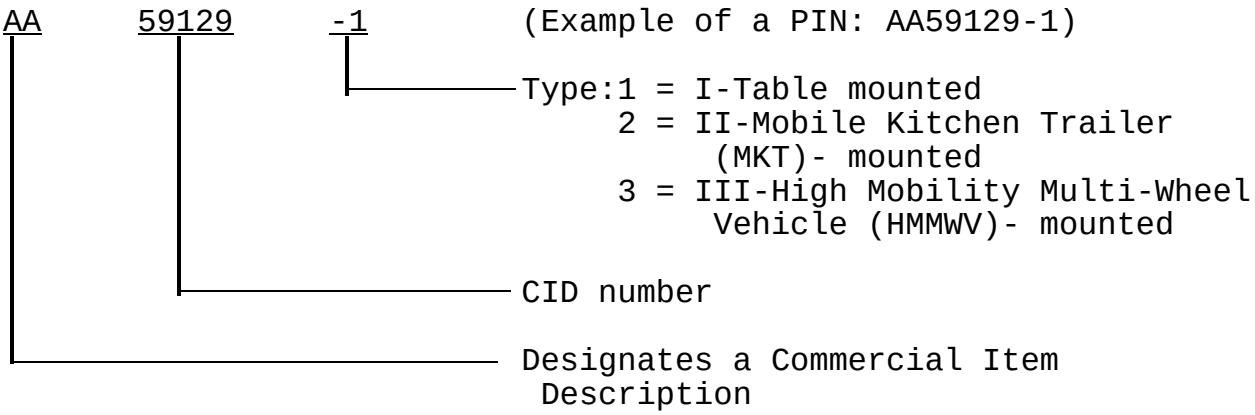

MILITARY INTERESTS:

Custodians
Army - GL
Navy - SA
Air Force - 99

Review Activities
Army - MD1, QM1
Air Force - 35, 84
Navy - CG, MC, YD1
DLA - IS, SS

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Preparing Activity:

ARMY - GL

Project 7330-0745

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:04Z
Check the source to verify that this is the current version before use.

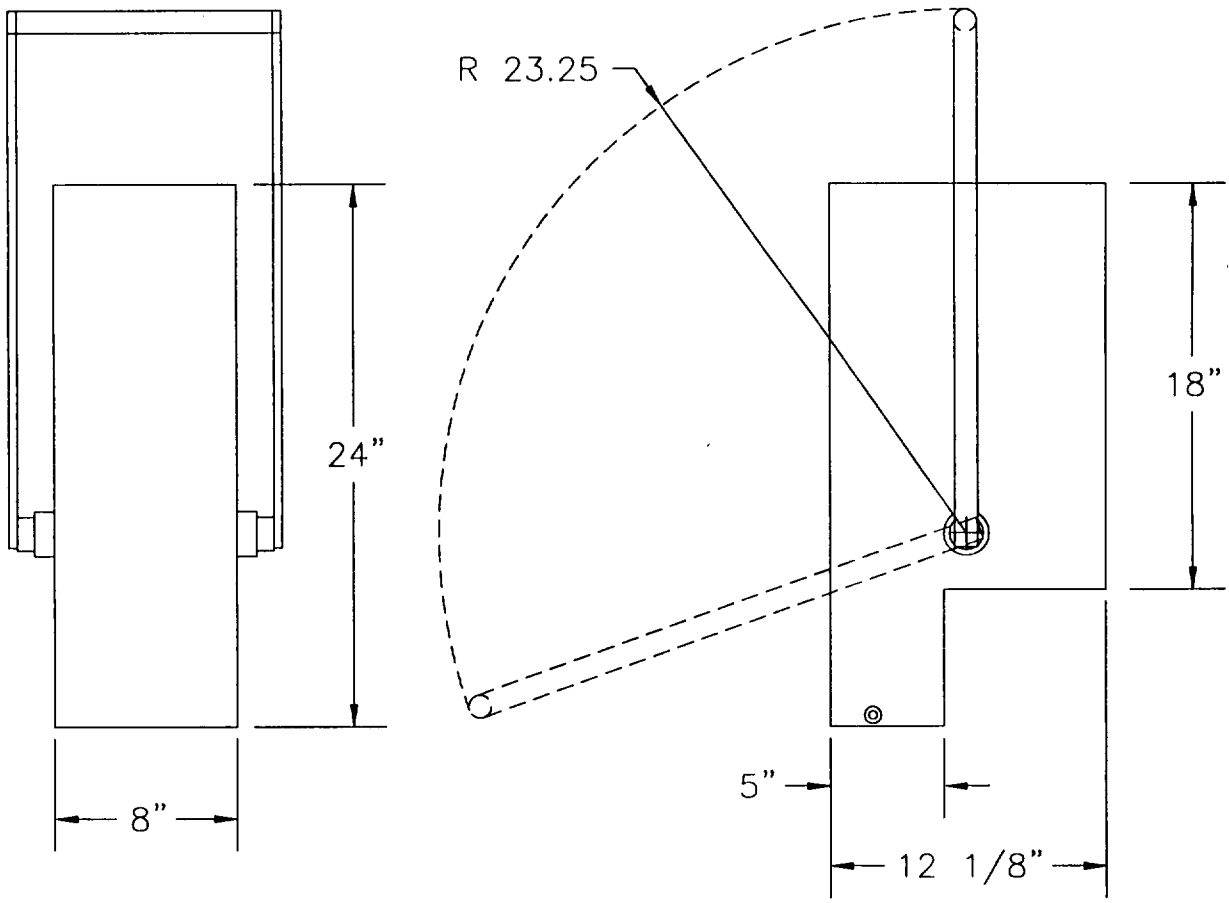


FIGURE 1. Can crusher

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:04Z
Check the source to verify that this is the current version before use.



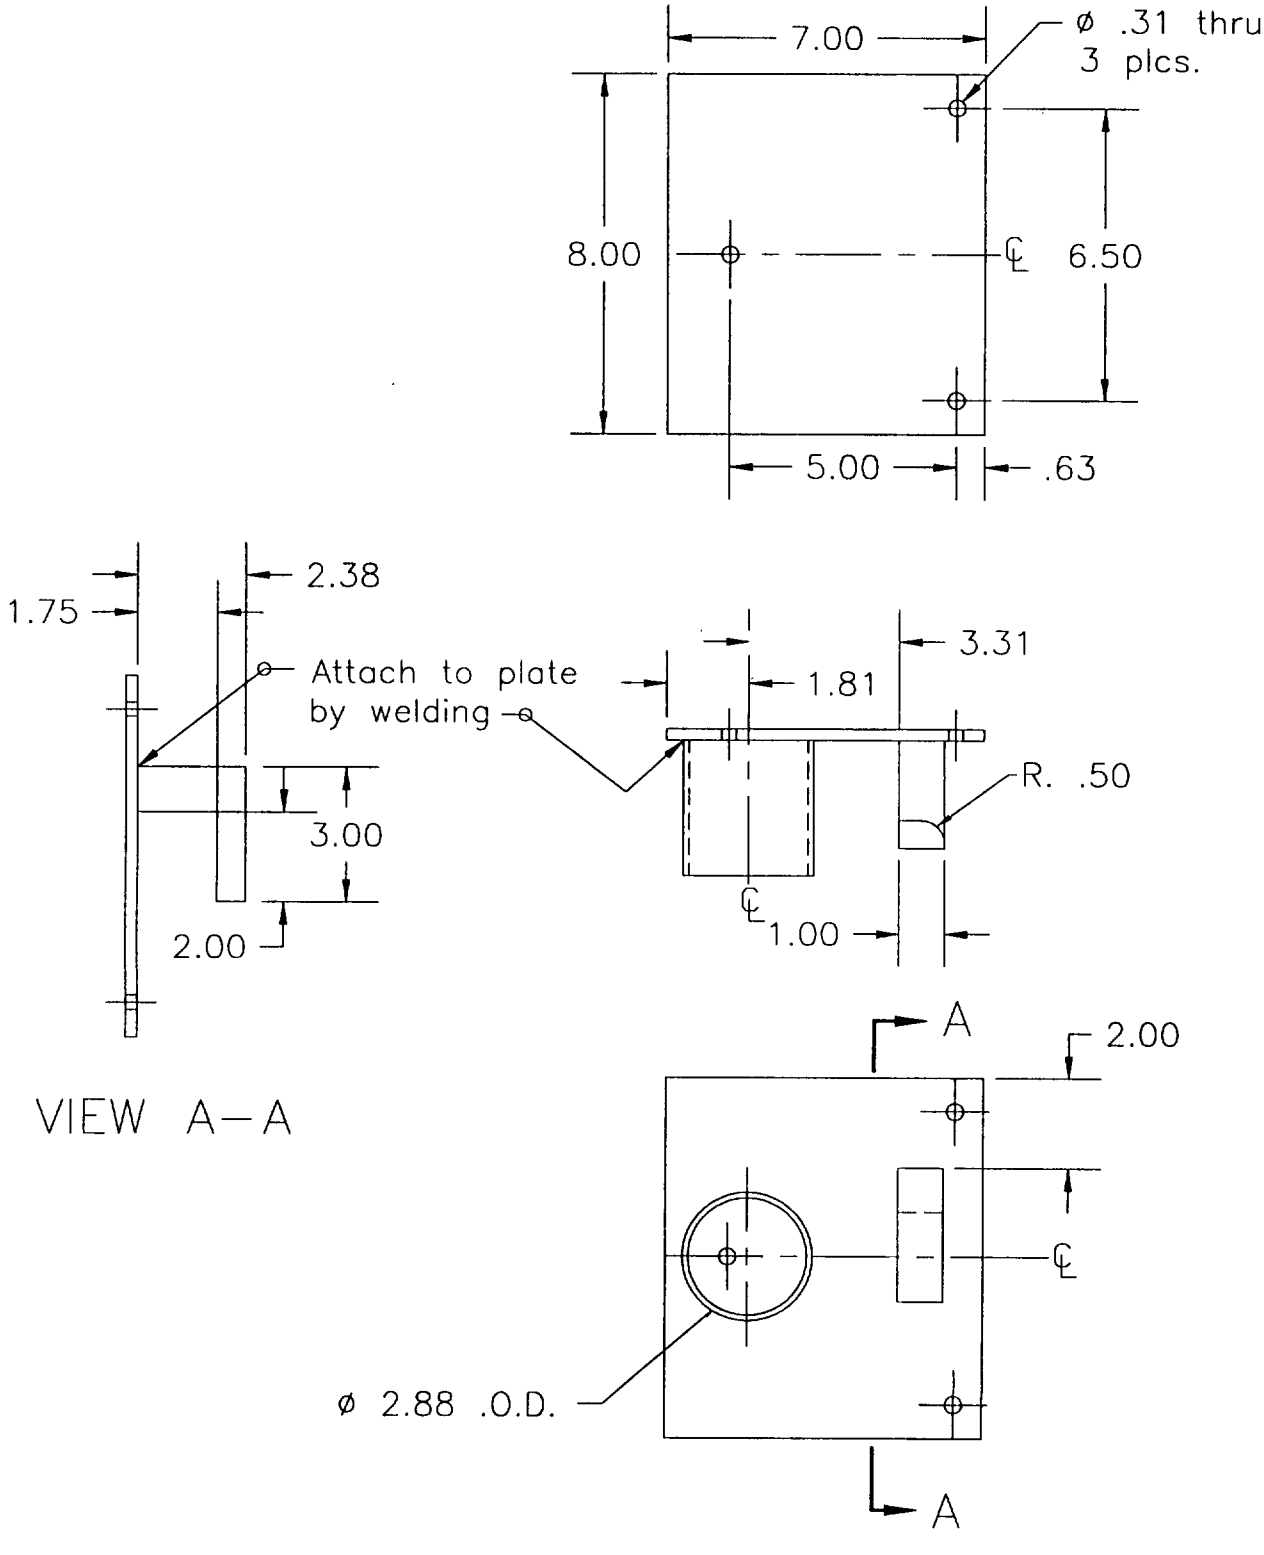



FIGURE 2. Mobile Kitchen Trailer mounting adapter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:04Z
Check the source to verify that this is the current version before use.

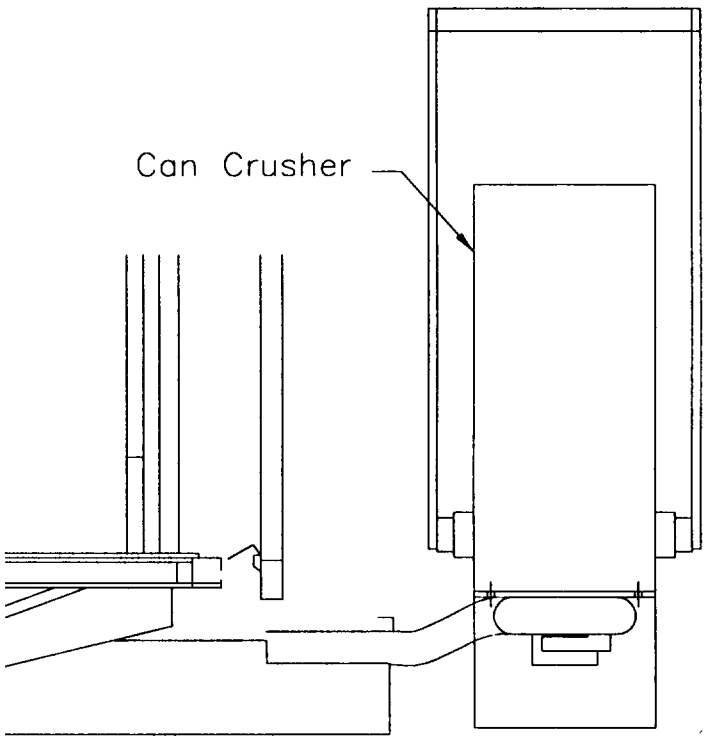

Place Can Crusher onto the hitch yoke of the Mobile Kitchen Trailer as shown

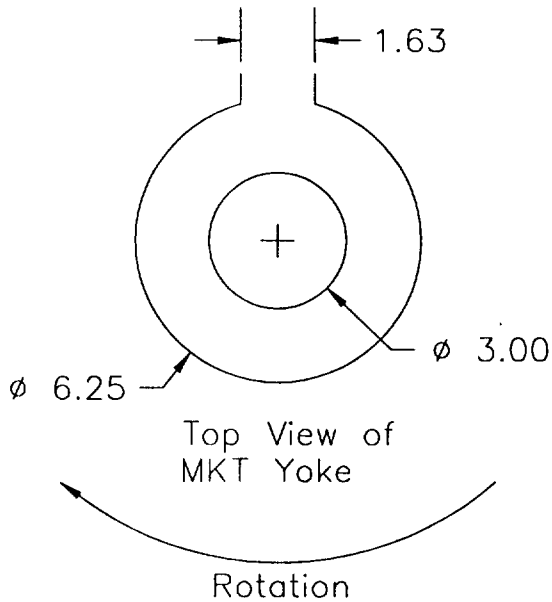


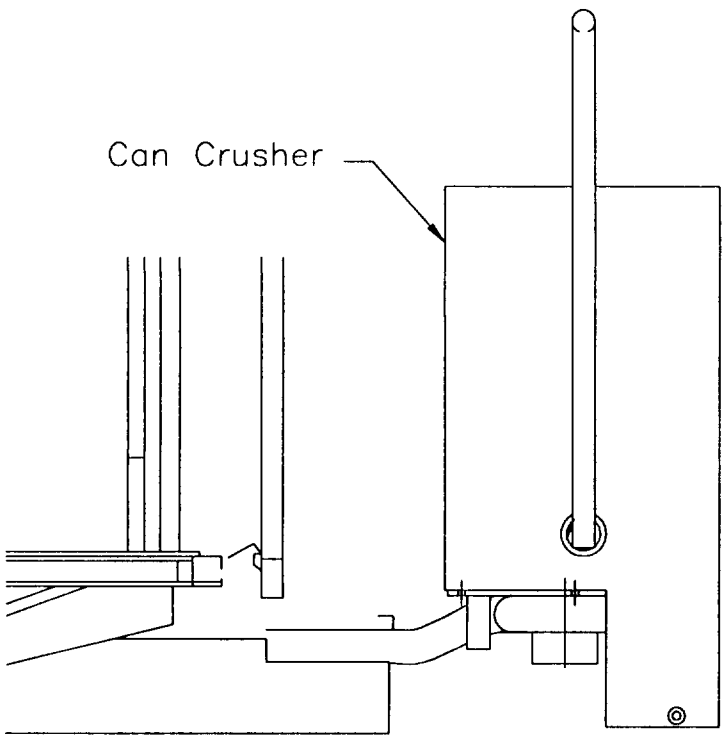

Rotate the Can Crusher 90° clockwise to lock in place

FIGURE 3. Mobile Kitchen Trailer (MKT) mounting

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:04Z
Check the source to verify that this is the current version before use.

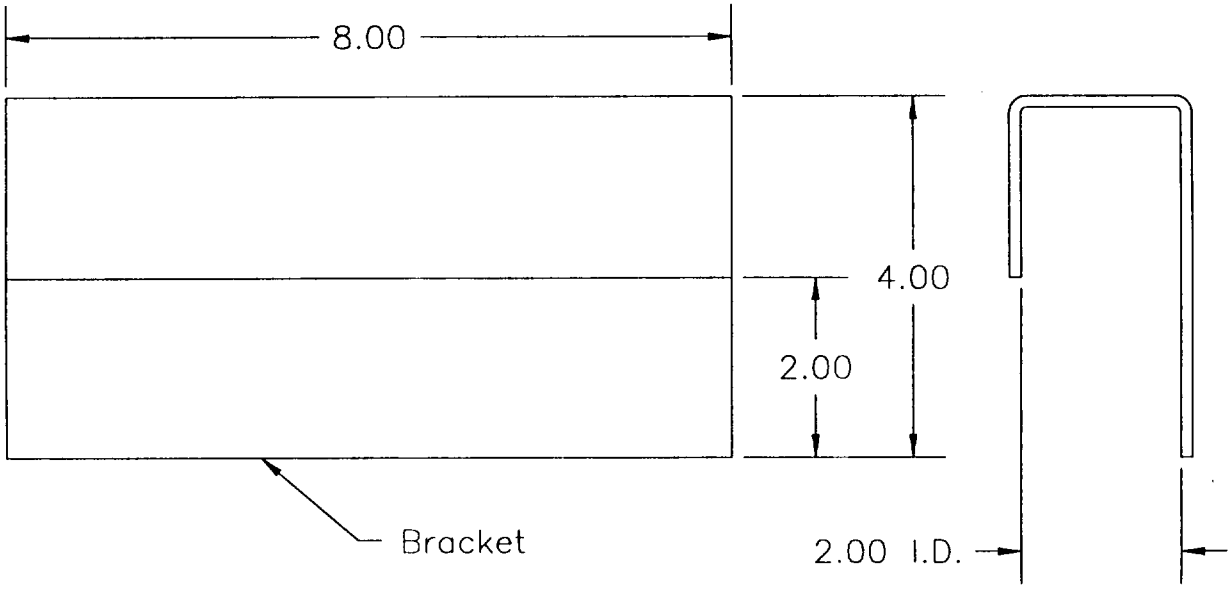

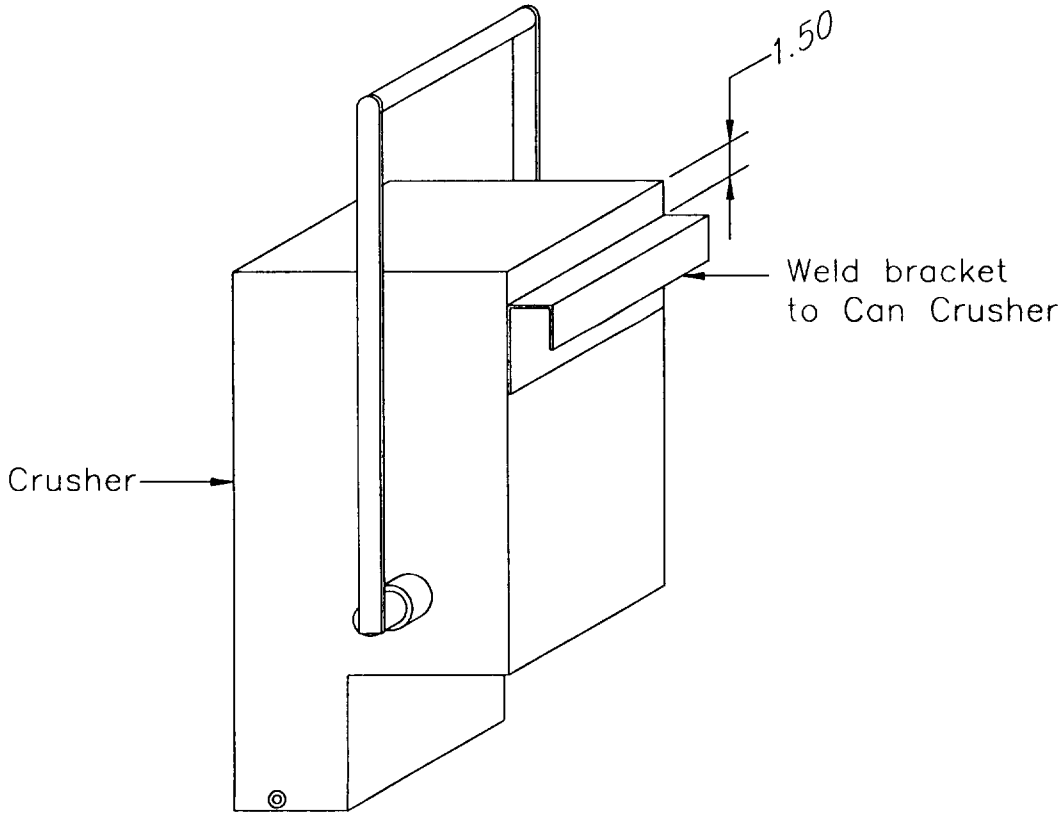


FIGURE 4. Bracket mount

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:04Z
Check the source to verify that this is the current version before use.

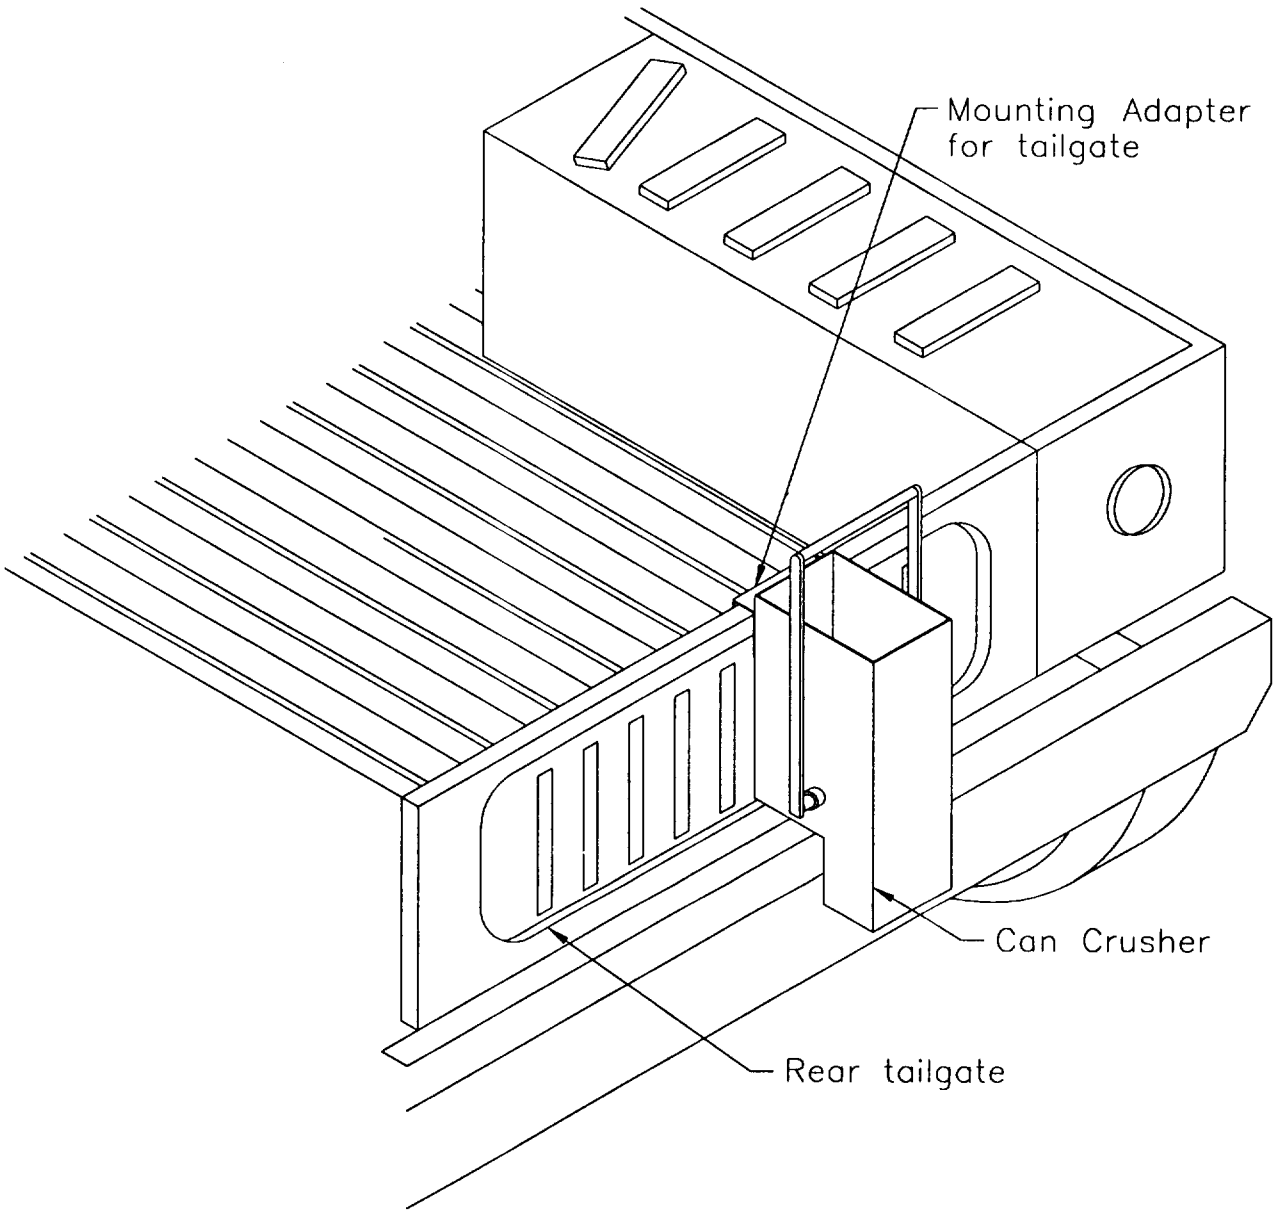


FIGURE 5. High Mobility Multi-Wheel Vehicle (HMMWV) mounting

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:04Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-59129	971003

3. DOCUMENT TITLE

CRUSHER, CAN

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
U.S. Army Natick RD&E Center	(1) Commercial 508-233-5175	(2) AUTOVON 256-5175
c. ADDRESS (Include Zip Code) Commander, U.S. Army Natick RD&E Center ATTN: SSCNC-WEF Natick, MA 01760-5018	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

NATICK OP1, 1 MAR 96 NATICK OP1, Jul 91 TS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-28T10:04Z
Check the source to verify that this is the current version before use.