[METRIC]
A-A-59236/1A
January 13, 2008
SUPERSEDING
A-A-59236/1
June 6, 2003

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

FUSE, INCLOSED LINK, FAST ACTING, 20 AMPERE (A) THROUGH 80 A, 58-VOLT, AUTOMOTIVE BLADE TYPE

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring the inclosed fuse links described herein shall consist of this document and the issue in effect of CID A-A-59236.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the PIN as shown in the following example (see NOTES).

AA59236	/01	-	001
CID number	Applicable CID sheet (two digits)		Dash number (see table I)

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Fuses supplied to this CID specification sheet shall be as specified herein (see figure 1).

Ampere rating. The ampere rating shall be as specified in table I.

Voltage rating. The voltage rating shall be 58 V dc minimum.

Opening time. The opening time shall be as specified in table II.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

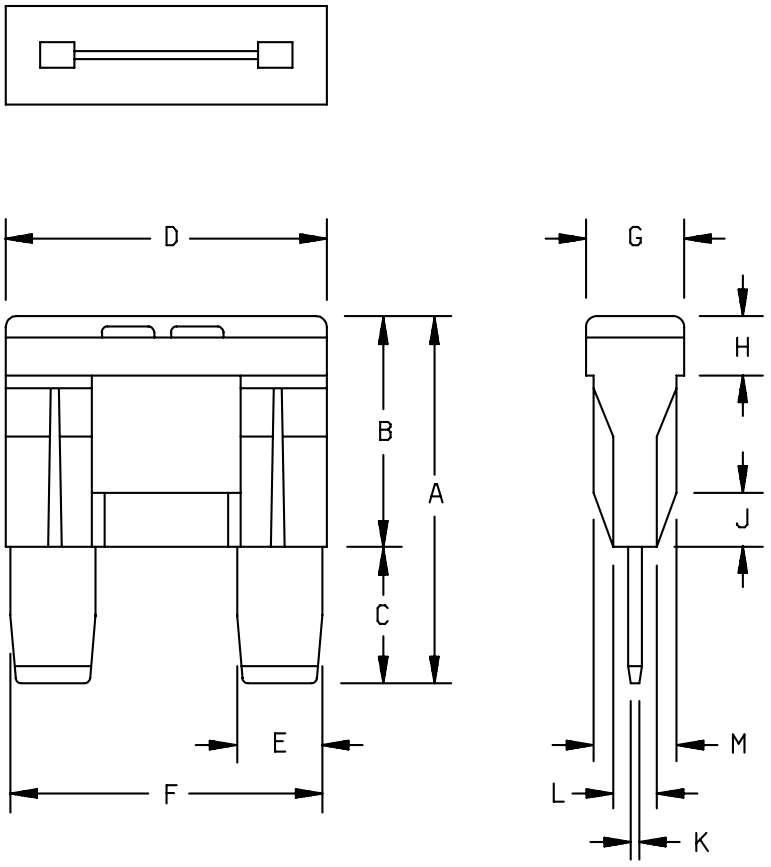

Ltr	mm		Inches	
	Min	Max	Min	Max
A	33.77	34.03	1.33	1.34
B	21.17	21.43	.83	.84
C	12.47	12.73	.49	.50
D	29.57	29.83	1.16	1.17
E	7.87	8.13	.31	.32
F	28.72	28.98	1.13	1.14
G	8.97	9.23	.35	.36
H	5.37	5.63	.21	.22
J	4.87	5.13	.19	.20
K	0.70	0.96	.03	.04
L	3.87	4.13	.15	.16
M	7.57	7.83	30	.31

NOTES:

1. Dimensions are in millimeters.
2. Tolerance is ±0.13 mm (.005 inch), unless otherwise specified.

FIGURE 1. Configuration and dimensions

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

CID dash number AA59236/01-	Ampere rating	Color code 1/
001	20	Yellow
002	25	Gray
003	30	Green
004	35	Brown
005	40	Orange
006	50	Red
007	60	Blue
008	70	Tan
009	80	Neutral

1/ Fuses are color-coded for easy amperage identification.

TABLE II. Rating versus opening time.

Percent of rating		Ampere rating								
		20	25	30	35	40	50	60	70	80
100	Min.	100 h	100 h	100 h	100 h	100 h	100 h	100 h	100 h	100 h
	Max.	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
135	Min.	60s	60s	60s	60s	60s	60s	60s	60s	60s
	Max.	1,800s	1,800s	1,800s	1,800s	1,800s	1,800s	1,800s	3,600s	3,600s
200	Min.	4.00s	4.00s	6.00s	6.00s	8.00s	10.0s	15.0s	4.00s	4.00s
	Max.	20.0s	30.0s	30.0s	40.0s	40.0s	50.0s	60.0s	60.0s	60.0s
350	Min.	0.70s	0.70s	1.00s	1.00s	1.40s	1.70s	2.00s	0.20s	0.20s
	Max.	2.00s	4.00s	4.00s	5.00s	5.00s	6.00s	7.00s	2.00s	2.00s
600	Min.	0.15s	0.15s	0.20s	0.20s	0.20s	0.20s	0.20s	0.04s	0.04s
	Max.	1.00s	1.00s	1.00s	1.00s	1.00s	1.00s	1.00s	0.15s	0.15s

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
75915	Littelfuse Incorporated 800 E. Northwest Highway Des Plaines, IL 60016-3096 Phone number (847) 824-1188 Facsimile number (847) 391-0894 E-mail: mailto:electronics@littelfuse.com Uniform Resource Locator (URL): http://www.littelfuse.com

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.

Part number (P/N) supersession data. These CID specification sheet PINs supersede the following MFR's P/N's as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE III. P/N supersession data.

CID dash number AA59236/01- (see table I)	MFR's CAGE	MFR's P/N 1/
001	75915	142.6885.5202
002	N/A	N/A
003	75915	142.6885.5302
004	N/A	N/A
005	75915	142.6885.5402
006	75915	142.6885.5502
007	75915	142.6885.5602
008	N/A	N/A
009	75915	142.6885.5702

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph of A-A-59236.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Preparing activity:

DLA-CC

Project 5920-2008-009

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:06Z
Check the source to verify that this is the current version before use.