NOT MEASUREMENT SENSITIVE


MIL-DTL-11132/56E(IH)
13 July 2026
SUPERSEDING
MIL-DTL-11132/56D(IH)
7 September 2021

DETAIL SPECIFICATION SHEET


BADGE, QUALIFICATION, MARKSMANSHIP, EXPERT, ARMY JROTC

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-I-11132.

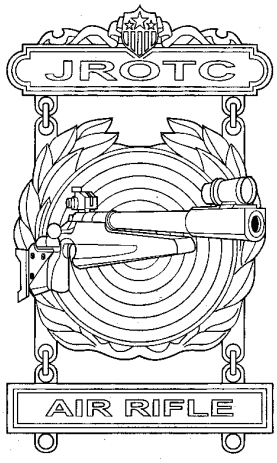


ASSEMBLED (See Note 2.)

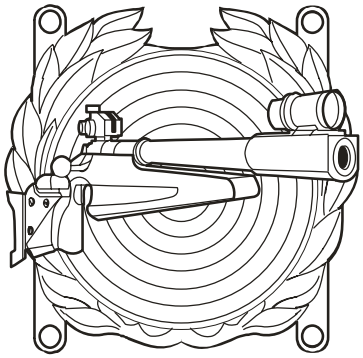

PENDANT



SUSPENSION BAR

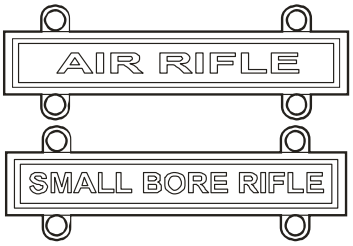

QUALIFICATION BARS

DASH NO.
-1: Air Rifle Qualification Bar
-2: Small Bore Rifle Qualification Bar

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: Nickel Plated, Silver Plated, Oxidized, Relieved, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 14.

DIMENSIONS:
SUSPENSION BAR (JROTC):
WIDTH: 1-1/2 inches (REF)
HEIGHT (Including built-in suspension rings) 5/8 inch (REF)
THICKNESS (At thickest point): 0.081 ± 0.005 inch
PENDANT (Target with Rifle & Wreath):
DIAMETER (Circumscribed; includes top & bottom built-in suspension rings): 1-7/16 inches (REF)
THICKNESS (At thickest point): 0.106 ± 0.010 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:27Z
Check the source to verify that this is the current version before use.

QUALIFICATION BAR (-1 or -2):
-1: AIR RIFLE:
WIDTH: 1-1/2 inches (REF)
HEIGHT (includes top & bottom built-in suspension rings): 1/2 inch (REF)
THICKNESS (at thickest point): 0.081 ± 0.005 inch
-2: SMALL BORE RIFLE:
WIDTH: 1-1/2 inches (REF)
HEIGHT (includes top & bottom built-in suspension rings): 1/2 inch (REF)
THICKNESS (at thickest point): 0.081 ± 0.005 inch

ATTACHING DEVICE:
1. Attaching device shall be prong and wing-type clutch.

2. Two prongs shall be located on the horizontal center line of the suspension bar, equidistant from each end and 1-1/4 inches ± 1/32 inch apart.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Badge shall be assembled with either the -1 or the -2 qualification bar.

3. Suspension rings and lugs shall be integral and pierced.

4. Links (jump rings) shall be fabricated from nickel plated wire with a nominal diameter of 0.050 ± 1/64 inch. The overall dimension of the links shall be 7/32 inch ± 1/64 inch in length by 5/32 inch ± 1/64 inch in width.

5. A forcer may be used to bring up the designs of the suspension bar and pendant.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2026-433)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:27Z
Check the source to verify that this is the current version before use.