INCH-POUND

MIL-A-48608B (AR)
28 January 1993
SUPERSEDING
MIL-A-48608A (MU)
15 March 1982

MILITARY SPECIFICATION

AMPLIFIER, DOPPLER BOARD ASSEMBLY: 11740262

This specification is approved for use by the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements, examinations and tests for a doppler amplifier board assembly used in Radar Receiver R-1475/VPS-2, part of Radar Set AN/VPS-2. (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-F-13926 - Fire Control Materiel: General Specification Governing the Manufacture and Inspection of

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document, should be addressed to: Commander, U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 1285

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

MIL-I-45607 - Inspection Equipment, Acquisition, Maintenance, and Disposition of

STANDARDS

MILITARY

MIL-STD-109 - Quality Assurance Terms and Definitions
MIL-STD-810 - Environmental Test Methods
MIL-STD-2073-1 - DOD Materiel Procedures for Development and Application of Packaging Requirements

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS (see 6.4)

US ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

11740262 - Doppler Amplifier Board Assembly
12950877 - Requirements for Soldering Electrical and Electronic Assemblies

SPECIAL PACKAGING INSTRUCTION

PS 1140262 - Packaging of Doppler Amplifier Board Assembly

(Copies of other Government documents, drawings, and publications required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as d8irected by the contracting activity.)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Material. Materials shall be in accordance with the applicable drawings and specifications.

3.2 Components and assemblies. The components and assemblies shall comply with all requirements specified on drawing 11740262, all associated drawings, and with all requirements specified in applicable specifications and standards. Where applicable, the assemblies shall meet the requirements of MIL-F-13926 as follows:

a. Dimensions and tolerances
b. Inorganic protective surface finishings
c. Part identification and marking
d. Workmanship

3.3 Environmental service conditions.

3.3.1 Vibration. The doppler amplifier shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to the equivalent of 6000 miles of track-laying vehicle operational vibration as defined by MIL-STD-810 narrowband random-on-random data for equipment installed on the deck of the M113 armored personnel carrier.

3.3.2 Shock. The doppler amplifier shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to a total of 18 impulse shocks consisting of three shock impulses of 15 g's ± 10%, 11 milliseconds ± 10%, half-sine wave applied in each direction of 3 mutually perpendicular axes.

3.3.3 Altitude Operating. The doppler amplifier shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches of Hg).

3.3.4 Temperature.

3.3.4.1 Operating. The doppler amplifier shall meet the requirements of 3.4 and 3.5 when stabilized thermally at any temperature between -40° and +155° F.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

3.3.4.2 Non-operating (storage). The doppler amplifier shall not suffer permanent damage when subjected to the constant temperature extremes of -60°F for a period of 4 hours (after temperature stabilization), and shall meet the requirements of 3.4 and 3.5 when returned to room ambient.

3.3.5 Humidity (nonoperating). The doppler amplifier shall meet the requirements of 3.5 after exposure to an atmosphere with a relative humidity of 95 ±5 percent for a period of not less than 10 days.

3.4 Electrical. Each conductor shall be electrically continuous as specified on the schematic diagram of the doppler amplifier.

3.5 Performance.

3.5.1 Input voltage. The input voltage to the doppler amplifier P.C. Board shall be 25.0 ±0.1 volts direct current (Vdc) at 25 milliamps (ma) applied to terminals E5 (+) and E4 (return).

3.5.2 Output noise. With the input signal terminals E6 and E7 open circuited, the output noise at E3 (E4 return) shall be 50 millivolts (mV) peak-to-peak (P-P) maximum, excluding any 60 Hz noise.

3.5.3 Gain. With an input signal frequency of 1KHz applied to terminals E6 and E7 (signal return) at a level sufficient to produce 300.0 ±0.1 mV at the output terminal E3 (E4 return), the gain shall be 79.0 ±1.5db.

3.5.4 Frequency response. With the input held constant at that level required to meet the condition of 3.5.3, and the input frequency is varied between 900Hz and 10KHz, the output level measured at E3 (E4 return) shall not vary a total of more than 1.0db. When the input frequency is increased to 20KHz,the output level shall be at least 2dB below the highest level observed between 900Hz and 10KHz.

3.5.5 Limiting action. With the input signal level at 1KHz, applied to E6 (E7 return) adjusted to just below output limiting (limiting threshold), the output voltage at E3 (E4 return) shall be 1.5 ±0.5 volts P-P. When the input level is increased by 20db and the 40db above limiting threshold, the output level shall not be greater than 2.0 volts P-P.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

3.5.6 Stability. When the input level is increased 65db above the limiting threshold, there shall be no indication of instability of the output waveform.

3.6 First article inspection. When specified in the contract or purchase order (see 6.2), a sample shall be subjected to first article inspection in accordance with the technical provisions herein (see 4.3).

3.7 Soldering. All soldering shall be in accordance with the requirements of Note 2 of Drawing 12950877.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of Sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 General provisions. Unless otherwise specified herein, the provisions of MIL-F-13926 apply and form a part of this specification. Reference shall be made to MIL-STD-109 to define quality assurance terms used herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).

b. Quality conformance inspection (see 4.4).

c. Special sampling inspection (see 4.5).

4.2.1 Inspection conditions. Unless otherwise specified, all examinations and tests shall be conducted at the following standard ambient conditions:

a.	Temperature	+50 deg to +90 deg F.
b.	Relative humidity	90% RH Max.
c.	Pressure	28 to 32 inches of Hg.

4.3 First article inspection.

4.3.1 Submission. The contractor shall submit a first article sample as designated by the contracting officer consisting of three doppler amplifiers for inspection in accordance with 4.3.2.

4.3.2 Inspections to be performed. As determined by the Government, the first article assemblies, components and test specimens may be subjected to any or all of the examinations and tests specified in this detail specification and be inspected for compliance with any or all requirements of the applicable drawings.

4.3.3 Rejection. If any assembly, component or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure of any assembly, component or test specimen to comply with any of the stated requirements.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. The term "inspection lot" is defined as a homogeneous collection of units of product from which a representative sample is drawn or which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer, in one unchanged process, using the same materials

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

and methods, in accordance with the same drawings, same drawing revisions, same specifications and same specification revisions. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with requirements.

4.4.2 Examinations and tests.

4.4.2.1 Components, assemblies and subassemblies.

a. Classification of characteristics. Quality conformance examinations and tests are specified in the following Classification of Characteristics paragraphs. The contractor's quality program or detailed inspection system shall provide assurance of compliance of all characteristics with the applicable drawing and specification requirements utilizing as a minimum the conformance criteria specified.

b. Alternative quality conformance provisions. Alternative quality conformance procedures, methods, or equipment, such as statistical process control, tool control, other types of sampling procedures, etc., may be used by the contractor when they provide, as a minimum, the level of quality assurance required by the provisions specified herein. Prior to applying such alternative procedures, methods, or equipment, the contractor shall describe them in a written proposal submitted to the Government for evaluation (see 6.3). When required, the contractor shall demonstrate that the effectiveness of each proposed alternative is equal to or better than the specified quality assurance provision(s) herein. In cases of dispute as to whether the contractor's proposed alternative(s) provides equivalent assurance, the provisions of this specification shall apply. All approved alternative provisions shall be specifically incorporated into the contractor's quality program or detailed inspection system, as applicable.

4.4.2.2 Final acceptance inspection. Subsequent to first article approval, examination and tests related to Section 3 herein shall be performed as specified in 4.4.2.3 and 4.5. Examination and test for packaging and marking shall be in accordance with MIL-STD-2073-1 and Section 5 herein.

4.4.2.3 Functional tests. The tests in Table I shall be performed on a 100% basis.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

TABLE I. Functional tests
(100% Inspection)

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
Critical:	None	N/A
Major:		
101. Electrical	3.4	4.7.2
102. Performance	3.5	4.7.3
Minor:	None	N/A

4.5 Special sampling. One doppler amplifier out of the first 50 produced and one out of each 100 produced thereafter shall be selected at random. The sample shall have met the requirements and tests of Table I and shall then meet the tests in Table II. Unless otherwise specified in the contract the items shall be returned to the lot upon successful completion of testing.

TABLE II. Special sampling

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
Critical:	None	N/A
Major:		
103. Vibration	3.3.1	4.7.1.1
104. Shock	3.3.2	4.7.1.2
105. Altitude	3.3.3	4.7.1.3
106. Temperature	3.3.4	4.7.1.4
107. Humidity	3.3.5	4.7.1.5
Minor:	None	N/A

4.6 Inspection equipment.

4.6.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

4.6.2 Contractor-furnished inspection equipment.

4.6.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment identified by drawing

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

number in specifications or QAPs forming a part of the contract shall be supplied by the contractor in accordance with the design specified. The contractor may, however, propose alternatives to Government designs for approval in accordance with 6.3.

4.6.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the "Methods of Inspection" specified in 4.7 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926 whenever Government designs are not specified (see 4.6.2.1). Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment. Contractor inspection equipment designs shall be submitted for approval in accordance with 6.3.

4.6.2.3 Test equipment: In conjunction with 4.6.2.1 and 4.6.2.2, the test equipment listed in Table III shall be used in the performance of the applicable test methods and procedures as specified in 4.7.

TABLE III. Test equipment list

Item number	Description	
1. Audio Oscillator	Frequency:	600 Hz to 20 KHz
	Amplitude:	10 to 400 mV variable
	Output Impedance:	50 ohms
	Max. Hum & Noise:	60dB below rated output
2. Analog AC Voltmeter	Voltage Range:	To 400 mV
	Frequency Range:	600 Hz to 20 KHz min.
	Accuracy:	+1%
	Input Impedance:	10 megohms
3. Variable Attenuator	Attenuation:	10dB to 80dB in
	5dB steps	+/- .5dB of setting
	Impedance:	50 ohms

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

4.	Power Supply	Output voltage:	+25.0 ±25.0 ±0.1 vdc
		Load Regulation:	0.01% max.
		Line Regulation:	0.01% max.
		Ripple & Noise:	200uV max.
		Output Current:	50mA min.
5.	Oscilloscope	Bandwidth:	1 MHz min.
		Deflection Factor:	AC mV/div to 1 v/div
		Input Impedance:	1 Megohm shunted by approximately 40 pF.
6.	Digital AC Voltmeter	Frequency Range:	100 Hz to 20 KHz min.
		Voltage Range:	To 1 volt
		Accuracy:	+/- 0.35% total
		Resolution:	10uV
		Input Impedance:	1 megohm
7.	Brass Test Plate	2 ft. by 3 ft., approximate	
8.	Termination	150 ohm, 1/2 W	
9.	Termination	50 ohm, 1/2 W	

4.7 Methods of inspection.

4.7.1 Environmental. Environmental tests shall be conducted in accordance with the test conditions, general test performance guidance, and individual test methods of MIL-STD-810 except as specified herein. Test facilities, chambers and apparatus used in conducting the tests contained in this specification shall be capable of meeting the conditions required.

4.7.1.1 Vibration. The test shall be performed as specified in Method 514, Category 8, Procedure I, of MIL-STD-810 and paragraph 3.3.1 herein. In Step 1 of Procedure I only steps 4 through 8 of paragraph II-2.1 apply. The doppler amplifier shall be attached to the vibration generator directly or with a fixture, and securely held by its normal means of attachment. After vibration, the 33-volt regulator shall be tested as specified in 4.7.2 and 4.7.3 herein to determine compliance with 3.3.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

4.7.1.2 Shock. This test shall be performed as specified in Procedure I, Section II of Method 516 of MIL-STD-810 except that:

a. The post test functional check (Step 5 of Procedure I) need not be conducted until completion of all shock impulses.

b. The shock pulses shall be 15 g's ± 10% amplitude and 11 ms ± 10% duration.

c. The maximum g shall occur at 5.5 milliseconds ±10%.

d. The shock measuring system shall have a flat frequency response within ± 10% from 20 to 2,000 hertz.

After the application of all the shock impulses, the 33-volt regulator shall be tested as specified in 4.7.2 and 4.7.3 to determine compliance with 3.3.2.

4.7.1.3 Altitude (operating and non-operating). This test shall be performed as specified in Procedures II Method 500, of MIL-STD-810. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.3.

4.7.1.4 Temperature.

4.7.1.4.1 High (operating and non-operating). This test shall be performed as specified in Procedures I and II, Method 501 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

4.7.1.4.2 Low (operating and non-operating). This test shall be performed as specified in Procedures I and II, Method 502 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

4.7.1.5 Humidity (non-operating). This test shall be performed in accordance with Procedure III, Method 507 of MIL-STD-810 except that in Step 7, checkout shall be performed at the conclusion of the test only, with the item at standard ambient conditions. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.5.

4.7.2 Electrical. Continuity shall be inspected by standard measuring equipment (SME), and visual examination for compliance with 3.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

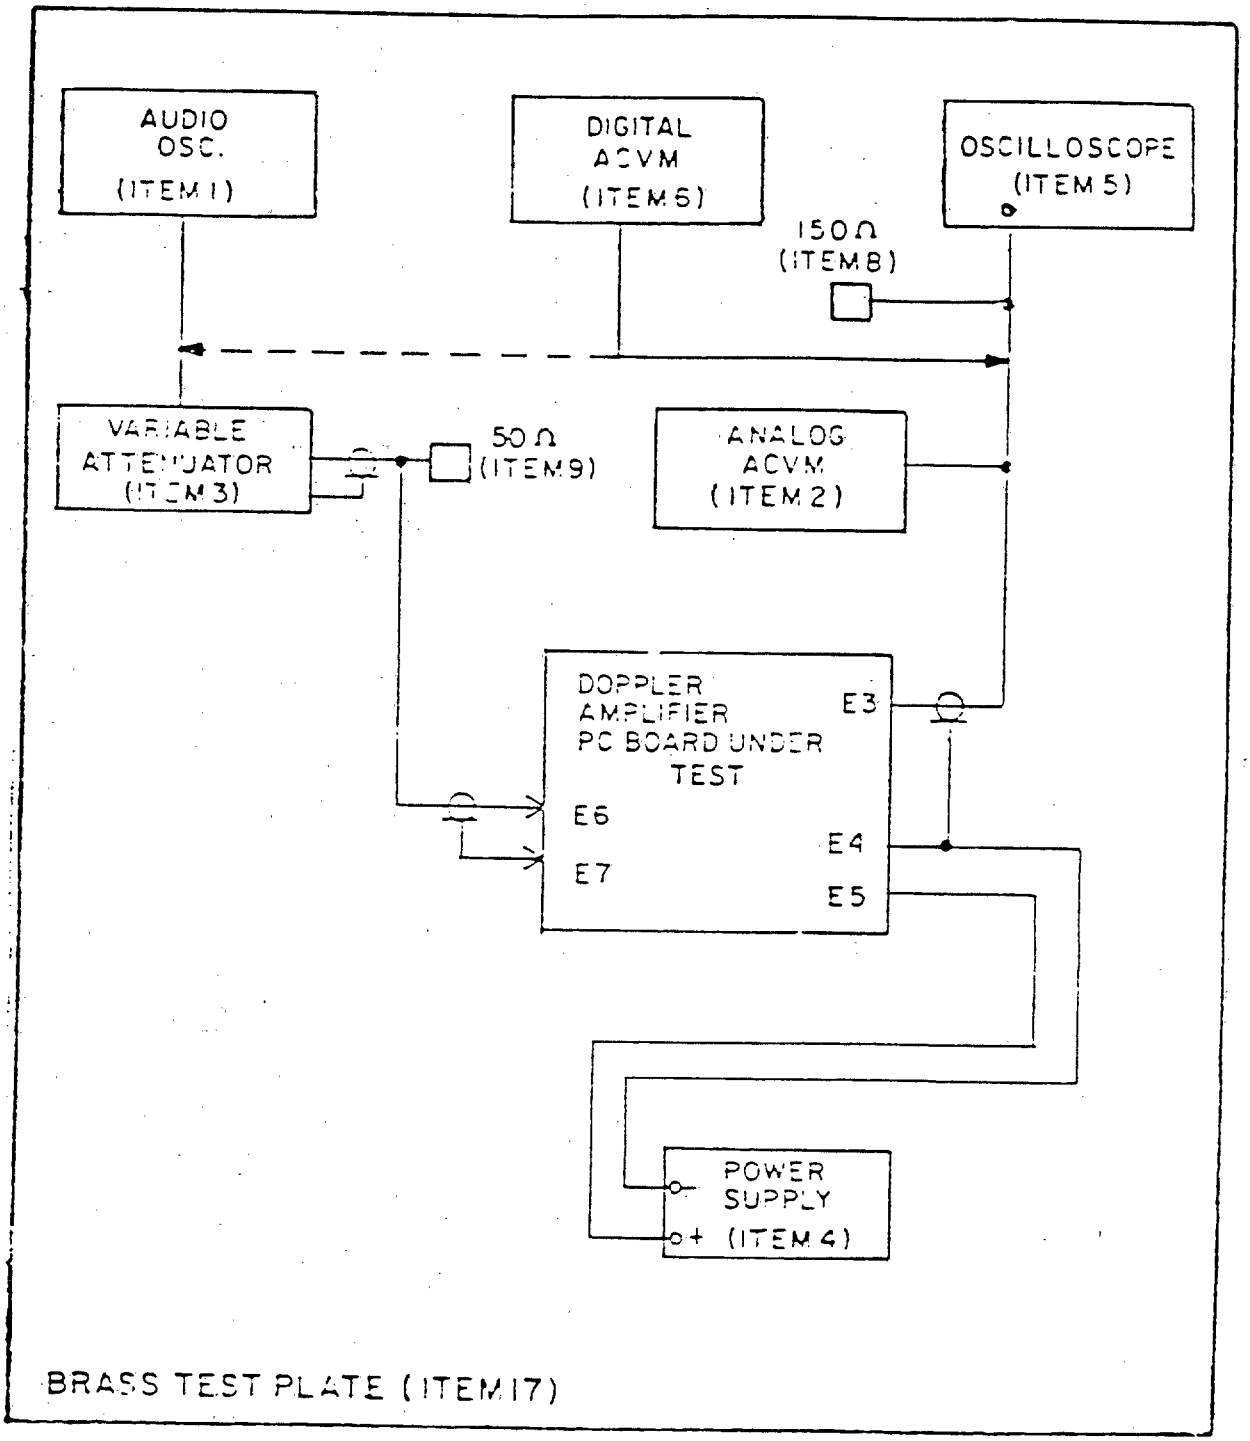


FIGURE 1. Test Equipment Setup

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

4.7.3 Performance. The doppler amplifier shall be tested as follows: Set up the equipment as shown in Figure 1. Do not apply power to the doppler amplifier under test. All test equipment is to be connected to its 110 V, 60 Hz source through three-prong grounding plugs. All test equipment, except the oscilloscope, shall be placed on the brass test plate, Item 7. The oscilloscope must have a ground strap connected to the brass test plate.

4.7.3.1 Input voltage. Apply the input voltage as specified in 3.5.1.

4.7.3.2 Output noise. With no input signal applied to terminals E6 and E7, use the oscilloscope, Item 5, to measure the output noise level as Specified in 3.5.2.

4.7.3.3 Gain. Adjust the attenuator, Item 3, for 80 decibels (dB) and connect the high side output to E6 and the low side to E7 of the doppler amplifier board assembly (UUT). Set the audio oscillator, Item 1, to 1 KHz and set its output level for a reading of 300.0 ±0.1mV rms measured at the output terminal E3 (E4 ret.) of the UUT, using the digital ac voltmeter, Item 6. Using the same ac voltmeter, measure the signal level at the output of the audio oscillator, Item 1. It shall be not less than 317.8mV rms and not more than 378.0mV rms.

4.7.3.4 Frequency response. Monitor the output level of the UUT at Terminal E3 (E4 ret.) with the analog ac voltmeter, Item 2. While holding the output level at the audio oscillator, Item 1, constant at that voltage noted in 4.7.3.3, slowly vary its frequency between 900 Hz and 10 KHz while noting the highest and lowest output level of the UUT. The difference between the highest and lowest output level shall be 1.0dB maximum.

4.7.3.4.1 Frequency response output. Increase the frequency to 20 KHz and note the output level of the UUT. It shall be at least 2.0dB below the highest level in the 900 Hz to 9 KHz range.

4.7.3.5 Limiting action. With the input signal applied as in 4.7.3.3, use the oscilloscope, Item 5, to observe the top of one cycle of the output signal and decrease the variable attenuator setting, Item 3, until the top of the sine wave just starts to flatten out. The output signal at the point of limiting shall be 1.5 ±0.5 volts peak-peak (P-P). Remove 20dB, then an additional 20dB from the attenuator, Item 3, and observe that the output signal level does not increase above 2.0V P-P in either case.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

4.7.3.6 Stability. With the conditions of 4.7.3.5 set up for threshold of limiting, remove 65dB from the attenuator, Item 3, and observe that the output waveform shows no sign of instability.

4.8 Soldering. Soldering processes shall be inspected by certified inspectors to the requirements and acceptance criteria of Note 2 of Drawing 12950877 as specified in paragraph 3.7.

5. PACKAGING

5.1 Packaging, packing, and marking. Packaging, packing, and marking shall be in accordance with Packaging Data Sheet 11740262. The level of protection shall be as specified in the procurement document.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The doppler amplifier board assembly is used in the Amplifier, Doppler Assembly 11740261 which is used in the Radar Receiver R-1475/VPS-2, part of Radar Set AN/VPS-2. It is a broadband amplifier which provides amplification of low-level doppler signals and supplies them to a phase detector.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.

b. Issue of DODISS to be cited in the solicitation, and, if required, the specific issue of individual documents referenced (see 2.1.2).

c. Requirements for submission of first article sample.

d. Applicable stock number.

e. Packaging requirements, if other than specified in Section 5.

f. Serialization requirements, if applicable.

g. Certificate of conformance for each lot or shipment of product.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

6.3 Submission of contractor inspection equipment designs for approval. Submit copies of designs as required to: Commander, U.S. Army ARDEC, ATTN: SMCAR-QAF-I Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament, Research, Development and Engineering Center (ARDEC) may also include drawings prepared by, and identified as U.S. Army Armament, Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC.

6.5 Subject term (key word) listing.

a. Radar Receiver
b. AN/VPS-2

6.6 Changes from previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1285-A886)

Source: https://assist.dla.mil - Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-A-48608	28 JANUARY 1993

3. DOCUMENT TITLE: AMPLIFIER, DOPPLER BOARD ASSEMBLY: 11740262

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets if needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
U.S ARMY ARDEC STANDARDIZATION OFFICE	(1) Commercial (201) 724-6674	(2) AUTOVON 880-6674
c. ADDRESS (Include Zip Code) ATTN: SMACA-BAC-S PICATINNY ARSENAL, NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 — *Previous editions are obsolete.* — 198/290

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.