MILITARY SPECIFICATION

CLOTHING OUTFIT, EXTREME COLD WEATHER SURVIVAL A/P22S-10

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers a clothing outfit consisting of extreme cold weather survival clothing that is vacuum packaged in plastic and placed in a fabric container. The clothing outfit is designated A/P22S-10.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

V-T-295	Thread, Nylon
QQ-P-35	Passivation Treatments for Corrosion-Resisting Steel
PPP-B-636	Boxes, Shipping, Fiberboard

Military

MIL-W-4088	Webbing, Textile, Woven Nylon
MIL-S-5002	Surfaces Treatment and Inorganic Coatings for Metal Surfaces of Weapons Systems
MIL-H-6875	Heat Treatment of Steels (Aerospace Practices, Process for)
MIL-C-20696	Cloth, Coated, Nylon, Waterproof
MIL-F-21840	Fastener Tapes, Hook and Pile, Synthetic
MIL-O-27525	Overcoat, Survival, Arctic SRU-6/P
MIL-M-27529	Mittens, Extreme Cold Weather Survival, SRU-10/P
MIL-F-27531	Foot Sack, Extreme Cold Weather Survival Type SRU-12/P
MIL-F-27532	Footwear Covers, Extreme Cold Weather Survival SRU-13/P

STANDARDS

Federal

FED-STD-191	Textile Test Methods
FED-STD-406	Plastics: Methods of Testing
FED-STD-751	Stitches, Seams, and Stitchings

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.

MIL-STD-130	Identification Marking of US Military Property
MIL-STD-143	Standards and Specifications, Order of Precedence for the Selection of
MIL-STD-831	Test Reports, Preparation of

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

H. Koch & Sons, Inc., Drawings (Code Identification 99449)

024-710299	Clothing Pack Survival, Arctic
025-710300	Clothing Kit, Survival, Arctic
120-12424	Tool, Cutting - Arctic Pack
127-710298	Container, Clothing Pack
129-710297	Content List & Cutting Inst. - Arctic Clothing Pack
148-710296	Envelope, Clothing Pack
176-710295	Mold, Clothing Pack - Arctic Survival

(Copies of these drawings of H. Koch & Sons, Inc. (Division of Global Systems, Inc.), Corte Madera, California can be obtained from the procuring activity or as directed by the contracting officer.)

Aerospace Material Specification (AMS)

5643	Steel Bars, Forgings, Tubing, and Rings, Corrosion Resistant 16.5Cr - 4.0Ni - 4.0Cu

(Copies of this specification can be obtained from the Society of Automotive Engineers, Inc.; Two Pennsylvania Plaza; New York, New York 10001.)

American Trucking Association, Inc. Publication

National Motor Freight Classification

(Copies of this publication can be obtained from the American Trucking Association, Inc.; Attention: Tariff Order Section; 1616 P Street, N. W.; Washington, D. C. 20036.)

Railroad Freight Classification Publication

Uniform Freight Classification

(Copies of this publication can be obtained from the Railroad Freight Classification; Room 206, Union Station Building; 516 West Jackson Boulevard; Chicago, Illinois 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries and are also distributed among technical groups and using federal agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article. Unless otherwise specified by the procuring activity (see 4.3 and 6.2), this specification makes provisions for first article inspection.

3.2 Major components. The clothing outfit shall consist of the following major components:

(a) One arctic pack container

(b) One arctic pack assembly.

3.3 Selection of specifications and standards. Specifications and standards for necessary commodities and services not specified herein shall be selected in accordance with MIL-STD-143.

3.4 Materials

3.4.1 Fabric container

3.4.1.1 Basic material. The basic material for the fabric container shall conform to type III, class 5 of MIL-C-20696 and shall be sage green conforming to USAF color shade No. 1535 (see 6.3).

3.4.1.2 Webbing. The webbing for the two carrying handles and for attaching the cutting tool shall conform to type I of MIL-W-4088. The webbing for one of the carrying handles shall be sage green conforming to USAF color shade No. 1531 (see 6.3). The webbing for the other carrying handle and the webbing for attaching the cutting tool shall be yellow conforming to USAF color shade No. 1365 (see 6.3).

3.4.1.3 Fastener tape. The hook and pile fastener tape for the fabric container shall be 1 inch wide and shall be Green OG 106 (see 6.3). The hook fastener tape shall conform to type II, class 1 of MIL-F-21840. The pile fastener tape shall conform to class 1 of MIL-F-21840.

3.4.1.4 Thread. The thread used for sewing the fabric container shall conform to type II, class 1, size E of V-T-295. The color of the thread shall approximately match the color of the basic material.

3.4.2 Steel. The material for the cutting tool shall be 0.188-inch-diameter, corrosion-resistant steel 17-4 conforming to AMS 5643. The material for the cutting tool shall be heat treated in accordance with class D, age temper treatment H900 (degrees Fahrenheit) of MIL-H-6875.

3.4.3 Sealant. The sealant required for the operations specified in table I shall be Glyptal No. 1201 red enamel, or equivalent, manufactured by the General Electric Company, Schenectady, New York.

3.4.4 Plastic material. The material for vacuum packaging the clothing shall be a low gas transmission, peelable, heat sealable plastic material. The plastic material shall be Vacugard 112A, or equal, which shall conform to the requirements specified in table II. (Vacugard 112A is manufactured by the Guardian Packaging Corporation, Newark, California.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.

TABLE I. Arctic Pack Assembly

Operation No.	Description
1	Extreme cold weather survival clothing (a) Tumble dry the clothing specified in 3.5.2.1 for 45 minutes at 180 degrees Fahrenheit.
2	First (inner) plastic envelope (a) Place a plastic envelope that conforms to the -3 configuration on H. Koch & Sons, Inc. Drawing 148-710296 in the bottom of a mold that conforms to H. Koch & Sons, Inc. Drawing 176-710295 with the proximal end of the neck of the plastic envelope adjacent to the lower surface of the mold. (b) Fold and place the clothing in the plastic envelope so that the overcoat will be in the bottom of the mold, the mittens will be in the acute corners of the mold, and the footwear covers will be in the obtuse corners of the mold. Place the foot sack on top. (c) Expell the entrapped air as much as possible, and heat seal the plastic envelope. (d) Heat seal with three seams, as shown on H. Koch & Sons, Inc. Drawing 148-710296, the bottom of the plastic envelope as close as possible to the clothing; trim the excess plastic material. (e) Adjust the clothing in the plastic envelope, and position the plastic envelope to fit in the mold. (f) Install the evacuation tube in the neck of the plastic envelope with a shoe-string tracer. (g) Connect the evacuation tube in the vacuum pump, and remove the free air. (h) Adjust the shape of the clothing as necessary to form a level pack. (i) Install a plastic top form and a pressure board on the top of the pack.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.

TABLE I. Arctic Pack Assembly (Cont)

Operation No.	Description
	(j) Place the mold with the plastic envelope, the plastic top form, and the pressure board under a 6-inch press, and perform the following: (1) Observe the barometric pressure on a manometer to determine ambient pressure. (2) Connect the evacuation tube to the rough vacuum pump. (3) Reduce supply air to 0 pound per square inch gage (psig) on press. (4) Open the air control valve to allow the piston ram to drop on the plastic envelope. (5) Adjust the shop air to increase the absolute manometer pressure to 0.3 inch above the ambient barometric pressure that was observed in No. 2(j)(1). (6) Open the vacuum pump valve to decrease the pressure to 0.3 inch below the ambient barometric pressure that was observed in No. 2(j)(1). (7) Repeat No. 2(j)(5) and No. 2(j)(6) until the supply air is at 180 psig. (8) Open the vacuum valve and increase the air pressure to the piston ram to 200 psig. (9) Apply the first coat of the sealant around the neck of the plastic envelope and around the evacuation tube. (k) Isolate the plastic envelope from the rough vacuum pump; transfer the mold, the plastic envelope, and the pressure plate to a 10-inch press. (l) Reconnect the plastic envelope to the vacuum pump, and continue to evacuate under pressure for 24 hours while periodically coating the neck of the plastic envelope and the evacuation tube with the sealant until all visible voids are filled. (m) At the completion of the 24-hour evacuation period, remove the plastic envelope from the mold and isolate the plastic envelope from the vacuum pump. (n) Connect the plastic envelope to a high pressure vacuum pump (see figure 1), and continue to evacuate for 24 hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.

TABLE I. Arctic Pack Assembly (Cont)

Operation No.	Description
	(o) Observe the vacuum meter for decrease in pressure; coat the evacuation tube and the neck of the plastic envelope with sealant, as required, until the vacuum meter indicates 0.050 torr. Periodically close the line valve and observe the meter. Any increase in the meter reading shall be considered an indication of leakage. Open the line valve, and repeat the application of the sealant. If the meter indication of 0.050 torr is not achieved or if leakage other than around the neck of the plastic envelope or around the evacuation tube is present, remove the plastic envelope from the vacuum line and repackage in accordance with No. 1(a) through No. 2(o). If the meter indication of 0.050 torr is achieved and if no leakage other than around the neck of the plastic envelope or around the evacuation tube is present, proceed with No. 2(p). (p) Partially withdraw the evacuation tube to clear the shoe-string tracer; apply a clamp across the neck between the clothing and the end of the evacuation tube, assuring that all wrinkles are removed. (q) Cut the neck of the plastic envelope; remove the evacuation tube; immediately heat seal the neck of the plastic envelope. (r) Measure and record the height (thickness) of the plastic envelope containing the clothing. The height shall be not greater than 4-1/8 inches. (s) Store the plastic envelope containing the clothing for 4 days, and observe daily for growth. (t) If growth is observed, remove the clothing from the plastic envelope and repackage the clothing starting with No. 1(a).
3	Second (outer) plastic envelope (a) Remove the aged plastic envelope containing the clothing from the ambient storage, and verify no growth. (b) Insert the plastic envelope containing the clothing in a second (outer) plastic envelope that conforms to the -1 configuration on H. Koch & Sons, Inc. Drawing 148-710296. (c) Date and serialize the content list and the cutting instructions; insert it in the outer plastic envelope as specified in the -1 configuration on H. Koch & Sons, Inc. Drawing 024-710299.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.

TABLE I. Arctic Pack Assembly (Cont)

Operation No.	Description
	(d) Heat seal with three seams, as shown on H. Koch & Sons, Inc. Drawing 148-710296, the outer plastic envelope as close as possible to the inner plastic envelope, and trim the excess plastic material. (e) Install the evacuation tube with the shoe-string tracer in the neck of the outer plastic envelope, and connect it to the manifold of the rough vacuum pump. (f) While the outer plastic envelope is being evacuated, adjust the shape. (g) Apply sealant to the neck of the outer plastic envelope and to the evacuation tube; evacuate for 24 hours; recoating the neck area with a sealant, as required by visual inspection. (h) Isolate the outer plastic envelope from the rough vacuum pump; connect the outer plastic envelope to the high vacuum pump. (i) Subject the outer plastic envelope to the operations described in No. 2(o) through No. 2(t). (j) Pull on the edges of the outer plastic envelope to check for leakage. The outer plastic envelope shall not pull away from the pack. If there is any indication of leakage of the outer plastic envelope, remove the outer plastic envelope and repeat the operations described in No. 3(a) through No. 3(i).
4	Fabric container (a) If there is no indication of leakage of the outer plastic envelope, place the double-packaged clothing in the fabric container specified in the -1 configuration on H. Koch & Sons, Inc. Drawing 025-710300.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.

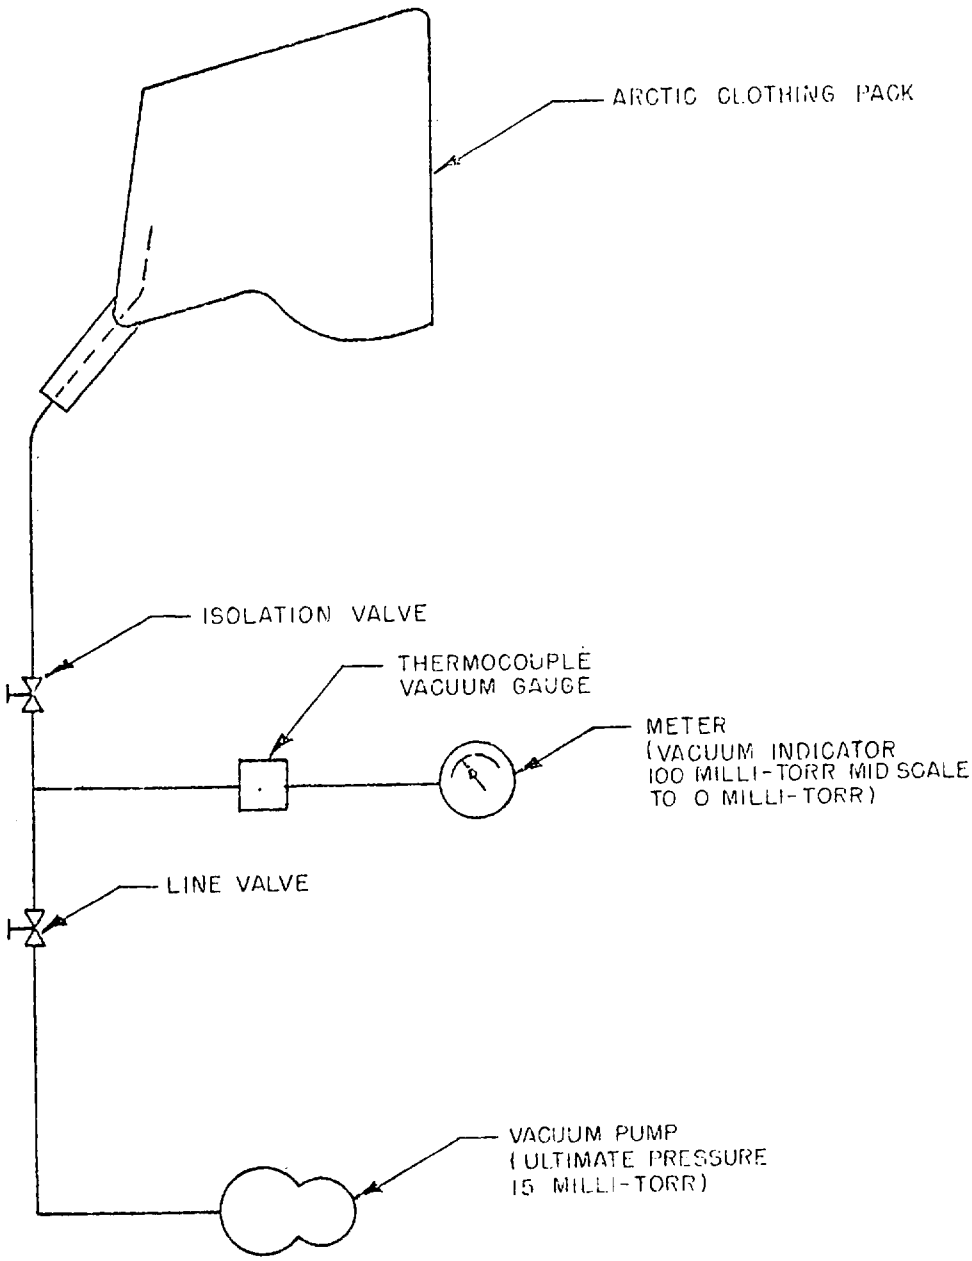


FIGURE 1. Instrumentation Schematic

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.

TABLE II. Plastic Material

Properties	Requirements
Yield and variation	3.2 mils, approximately 7,740 square inches (plus or minus 10 percent) per pound
Gas transmission rate (oxygen)	1 cubic centimeter per 100 square inches per 24 hours at atmosphere of 38 degrees Fahrenheit and 90 percent relative humidity
Tear strength (Elmendorf method)	1/
Machine direction	216 grams
Transverse direction	550 grams
Burst strength (Mullen method)	material yields without bursting at 30 psi
Tensile strength	2/
Machine direction	10.1 pounds per 1-inch width
Transverse direction	10.1 pounds per 1-inch width
Elongation (percentage)	2/
Machine direction	260 percent
Transverse direction	180 percent
Flex crack resistance (Gelbo)	withstand 120 cycles 3/
Seal strength	2,900 grams per 1-inch width 2/
Sealing conditions	
Temperature range	280 to 385 degrees Fahrenheit
Dwell	0.5 second and 30 psi

1/ Tear strength shall be determined as specified in method 5132 of FED-STD-191.
2/ Tensile strength, elongation, and seal strength shall be determined as specified in method 1013 of FED-STD-406.
3/ A cycle shall consist of 440-degree rotation, 6-inch stroke at 40 cycles per minute.

3.5 Design and construction. Except for the extreme cold weather survival clothing, the clothing outfit shall be designed and constructed in accordance with the -1 configuration on H. Koch & Sons, Inc. Drawing 025-710300 and the detail drawings as specified herein. In the event the requirements of the drawings and the text of this specification conflict, the text of this specification shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.

3.5.1 Arctic pack container. The arctic pack container shall consist of a cutting tool to cut the plastic envelopes of the arctic pack assembly and a fabric container to form the outer protective cover of the arctic pack assembly. The arctic pack container shall conform to the -1 configuration on H. Koch & Sons, Inc. Drawing 127-710298. The stitches, seams, and stitchings used in the construction of the arctic pack container shall be in accordance with FED-STD-751.

3.5.2 Arctic pack assembly. The arctic pack assembly shall consist of the extreme cold weather survival clothing, the cutting instructions and content list, and the plastic envelopes specified herein. The extreme cold weather survival clothing and the cutting instructions and content list of the arctic pack assembly shall be assembled and vacuum packaged in plastic envelopes in accordance with the -1 configuration on H. Koch & Sons, Inc. Drawing 024-710299 and as specified in table I.

3.5.2.1 Extreme cold weather survival clothing. The extreme cold weather survival clothing in the arctic pack assembly shall be in the color specified (see 3.7) and shall be as follows:

(a) One SRU-6/P overcoat conforming to class 1 or 2 of MIL-O-27525

(b) One pair of SRU-10/P mittens conforming to class 1 or 2 of MIL-M-27529

(c) One SRU-12/P foot sack conforming to class 1 or 2 of MIL-F-27531

(d) One pair of SRU-13/P footwear covers conforming to class 1 or 2 of MIL-F-27532.

3.5.2.2 Content list and cutting instruction. The content list and cutting instructions in the arctic pack assembly shall conform to the -1 configuratic on H. Koch & Sons, Inc. Drawing 129-710297.

3.5.2.3 Plastic envelopes. The plastic envelopes of the arctic pack assembly shall conform to H. Koch & Sons, Inc. Drawing 148-710296.

3.6 Envelope dimensions. The maximum envelope dimensions of the clothing outfit shall be as specified on H. Koch & Sons, Inc. Drawing 127-710298 for the A/P22S-10 clothing outfit.

3.7 Color. The color of the extreme cold weather survival clothing for the clothing outfit shall be sage green or Indian orange as specified by the procuring activity (see 6.2).

3.8 Finish. In lieu of the finish specified on H. Koch & Sons, Inc. Drawing 120-12424, the finish of the cutting tool shall be as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.

3.8.1 Pretreatment. The cutting tool shall be subjected to a pretreatment to remove all corrosion products; scale; paint; grease; oil; flux; and any other foreign material including other metals without any damaging effect on the metal such as pits, intergranular attack, and significant etchings. Appropriate inspection procedures to insure that the pretreatment has removed all contamination from the cutting tool shall be established and used therefor. The pretreatment shall consist of vapor degreasing. The vapor degreasing shall be accomplished, using ultrasonic cleaning equipment and trichloroethylene, in accordance with MIL-S-5002. After the cutting tool has been subjected to the vapor degreasing, it shall be kept free of all contamination until it is subjected to the passivation treatment.

3.8.2 Passivation treatment. After the cutting tool has been subjected to the pretreatment described in 3.8.1, the cutting tool shall be subjected to a passivation treatment. The passivation treatment shall be conducted in accordance with type I, II, or III of QQ-P-35 or the following method:

(a) Completely immerse the specimens, for a 2-minute period, in a solution that is composed of nitric acid, hydrofluoric acid, and water and that is maintained at a temperature of 65 to 120 degrees Fahrenheit. The solution shall contain 10 percent (volume) of nitric acid, 2 percent (volume) of hydrofluoric acid, and the remainder of water.

(b) Water rinse the specimens.

(c) Completely immerse the specimens, for a 5-minute period, in a solution that is composed of nitric acid, sodium dichromate, and water and that is maintained at a temperature of 120 to 150 degrees Fahrenheit. The solution shall contain 18 to 25 percent (volume) of nitric acid, 4 to 6 percent (weight) of sodium dichromate, and the remainder of water.

(d) Water rinse the specimens.

(e) Air dry the specimens.

3.9 Identification of product. Except for the extreme cold weather survival clothing, the clothing outfit shall be marked for identification, in accordance with MIL-STD-130, as specified on the drawings referenced herein.

3.10 Operational markings. The clothing outfit shall contain clear, concise operational markings which describe the method of disassembling the clothing outfit to gain access to the extreme cold weather clothing. The operational markings shall be made with indelible ink. The information, the color, and the location of the operational markings shall be in accordance with the -1 configuration on H. Koch & Sons, Inc. Drawing 127-710298.

3.11 Government furnished property. When specified by the procuring activity (see 6.2), the extreme cold weather survival clothing specified in 3.5.2.1 will be furnished by the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.

3.12 Workmanship. The clothing outfit shall be constructed in a thoroughly workmanlike manner. The accuracy of dimensions, the marking of parts and assemblies, and the thoroughness of sealing shall be given particular attention.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection required by this specification is classified as follows:

(a) First article inspection

(b) Quality conformance inspection.

4.3 First article inspection. Unless otherwise specified by the procuring activity (see 3.1 and 6.2), the first article samples shall be subjected to the first article inspection to determine compliance with the requirements specified herein with respect to materials, design, construction, dimensions and workmanship. The first article samples shall consist of five unassemble arctic pack containers and of five completely assembled clothing outfits. The first article inspection for the unassembled arctic pack containers shal consist of the intermediate inspection described in 4.4.3.1 and 4.4.3.2. Th first article inspection for the completely assembled clothing outfits shall consist of the end item inspection described in 4.4.4.1 and 4.4.4.2. When required by the procuring activity (see 6.2), a first article test report shall be prepared in accordance with MIL-STD-831.

4.4 Quality conformance inspection. Quality conformance inspection shall consist of the following inspection as described herein.

(a) Material and component inspection

(b) In-process inspection

(c) Intermediate inspection

(d) End item inspection.

4.4.1 Material and component inspection. Unless otherwise specified herein, materials and components to be used in the manufacture of the clothing outfits shall be inspected in accordance with the applicable quality assurance provisions of the specifications referenced herein and inspected for compliance with the applicable provisions of the H. Koch & Sons, Inc. drawings referenced herein. When specified by the procuring

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.

activity (see 6.2), certificates of compliance with the requirements specified herein for the applicable materials and components shall be furnished by the supplier. The certificates of compliance shall be accompanied by actual test or inspection reports or other verifiable data.

4.4.2 In-process inspection. In-process inspection of the clothing outfits as required to determine whether operations or assemblies conform to the requirements specified herein shall be made at any point or during any phase of the manufacturing process. Nonconformance of operations or assemblies to requirements specified herein during in-process inspection of the clothing outfits shall be cause for rejection of the clothing outfits represented by the operations or assemblies.

4.4.2.1 Points or phases of operations. In-process inspection to determine compliance with the requirements specified in table I shall include the following points or phases of operations:

(a) Drying of clothing

(b) Folding and positioning of clothing in first (inner) envelope

(c) Heat sealing of first (inner) envelope

(d) Evacuation of first (inner) envelope

(e) Application of sealant around neck of first (inner) envelope and around evacuation tube

(f) Check for leakage of first (inner) envelope

(g) Check of height (thickness) of first (inner) envelope after it is vacuum packaged with clothing

(h) Insertion of inner envelope that is vacuum packaged with clothing into second (outer) envelope

(i) Insertion of content list and cutting instructions between inner and outer envelopes

(j) Heat sealing of second (outer) envelope

(k) Application of sealant around neck of second (outer) envelope and around evacuation tube

(l) Evacuation of second (outer) envelope

(m) Check for leakage of second (outer) envelope.

4.4.3 Intermediate inspection. The unassembled arctic pack container shall be subjected to the intermediate inspection which shall consist of the examinations described in 4.4.3.1 and 4.4.3.2. The sample unit for the intermediate inspection shall be one unassembled arctic pack container. The inspection level shall be I of MIL-STD-105 for the intermediate inspection. The acceptable quality level shall be 4.0 defects per 100 units (one class) for the examinations described in 4.4.3.1 and 2.5 defects per 100 units (one class) for the examinations described in 4.4.3.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.

4.4.3.1 Examination for defects. The unassembled arctic pack container shall be visually examined for the defects listed for the arctic pack container in table III.

4.4.3.2 Examination of dimensions. The unassembled arctic pack container shall be examined to determine conformance of the unassembled arctic pack container to the dimensions specified for the arctic pack container on the drawings referenced herein. Each dimension that is not in accordance with the dimensions specified on the drawings shall be classified as a defect.

4.4.4 End item inspection. The clothing outfit shall be subjected to the end item inspection which shall consist of the examinations and tests described in 4.4.4.1 and 4.4.4.2. The sample unit for the end item inspection shall be one clothing outfit, which shall consist of one completely fabricated and assembled arctic pack container with sealed extreme cold weather survival clothing inside. The inspection level shall be II of MIL-STD-105 for the examinations described in 4.4.4.1 and S-3 of MIL-STD-105 for the tests described in 4.4.4.2. The acceptable quality level for the examinations described in 4.4.4.1 shall be 4.0 defects per 100 units (one class). If any clothing outfit that is subjected to the tests described in 4.4.4.2 is defective, the lot represented by the defective clothing outfit shall be rejected.

4.4.4.1 End item examination for defects. The clothing outfit shall be examined visually for the defects listed for the clothing outfit in table III.

4.4.4.2 Determination of maximum thickness. The test equipment used to determine conformance of the clothing outfit to the maximum thickness specified herein shall include a flat surface and a height gauge mounted above the flat surface. The width of the flat surface and the span of the height gauge shall be at least 1 inch greater than the maximum width of the clothing outfit. The distance between the height gauge and the flat surface during the end item inspection shall not exceed 4.20 inches. The clothing outfit shall be placed on the flat surface and pushed under the height gauge. A clothing outfit that is restricted from sliding under the height gauge by contact with the height gauge shall be considered to be defective.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A.

5.1.1 Level A. Each clothing outfit shall be preserved and packaged in accordance with level A which shall consist of placing the arctic pack assembly specified in 3.5.2 into the arctic pack container specified in 3.5.1.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Each clothing outfit preserved and packaged as specified in 5.1.1 shall be packed in a snug-fitting box. The box shall be constructed, closed, and reinforced to conform to type CF or SF, class weather-resistant, style RSC of PPP-B-636.

5.2.2 Level B. Each clothing outfit preserved and packaged as specified in 5.1.1 shall be packed in a snug-fitting box. The box shall be constructed, closed, and reinforced to conform to type CF or SF, class domestic, style RSC of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.

TABLE III. Examination for Defects

Examine	Defect (One Class)
Arctic pack container	Coated nylon cloth containing any coating defect such as abrasion, blister, cut, hole, or uncoated area
	Color of coated nylon material not sage green
	Webbing containing any hole, cut, or tear
	Edge of webbing frayed or scalloped or webbing not firmly and tightly woven
	Cut end of webbing not fused
	Webbing not specified color or width
	Any hole, cut, or tear in fastener tape
	Hooks missing from hook fastener tape
	Hooks of hook fastener tape flattened
	Hooks or pile surface of fastener tape not located as specified
	Hook or pile fastener tape not specified width or color
	Cutting tool not attached as specified or insecurely attached
	Cutting edge of cutting tool not sharp
	Cutting tool broken or malformed or cutting tool containing burr or corroded areas
	Cutting tool failing to serve intended purpose
	Cutting tool not made of specified material or finish not as specified
	Nylon sewing thread cut, torn, chafed, or otherwise damaged, affecting serviceability
	Nylon sewing thread not specified type, size, or color
	Seam or stitch type not specified type
	Loose stitch tension, resulting in loose seam

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.

TABLE III. Examination for Defects (Cont)

Examine	Defect (One Class)
Arctic pack assembly	Tight stitch tension, resulting in excessive tightness or puckering of cloth
	Open seam
	Two stitches per inch more or less than stitches per inch specified
	Row of stitching omitted
	Boxstitching not located where specified
	Boxstitching incomplete
	Dimensions of boxstitching less than specified
	Variation from specified design or construction
	Any characteristic not in accordance with specified requirements
	Operation not accomplished as specified
	Component omitted or operation omitted
	Component not attached as specified
	Identification marking omitted, incorrect, illegible, or misplaced
	Design and construction not as specified
	Bulging or distortion of pack
	Evidence of leakage of pack
	Content list or cutting instructions missing
	Content list and cutting instruction card not located in specified position
	Content list or cutting instruction markings incorrect, illegible, or misplaced
	Inner plastic envelope missing
	Extreme cold weather survival clothing item missing
	Footwear covers not placed in innermost position

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.

TABLE III. Examination for Defects (Cont)

Examine	Defects (One Class)
	Heat-sealed seams not in proper location Evidence of poor heat seals, resulting in inadequate fusion Any component damaged Marking omitted, incorrect, illegible, or improperly applied

5.2.3 Level C. Each clothing outfit preserved and packaged as specified in 5.1.1 shall be packed to afford adequate protection against damage during direct shipment from the supply source to the first receiving activity for immediate use at the lowest transportation rate for such supplies. The container shall be in accordance with the Uniform Freight Classification rules or the National Motor Freight Classification rules, as applicable. This level may be the supplier's commercial practice provided the latter meets the requirements of this level.

5.3 Marking. In addition to any special marking required by the contract or order, interior and exterior containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The A/P22S-10 clothing outfit covered by this specification is intended for inclusion in the crew module of the F/FB-111 aircraft.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification

(b) Specify first article requirements (see 3.1 and 4.3)

(c) Specify color of extreme cold weather survival clothing (see 3.7)

(d) Specify Government furnished property (see 3.11)

(e) Specify requirements for certificates of compliance (see 4.4.1)

(f) Selection of applicable level of packing (see 5.2).

6.3 Color samples. Color samples can be obtained from the procuring activity or as directed by the procuring activity.

Custodian:
Air Force - 11

Reviewer:
Air Force - 82

Preparing activity:
Air Force - 11

Project No. 8415-F916

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

C16061

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.

FOLD

4950/TZS
Wright-Patterson AFB, O 45433

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE AIR FORCE
DoD-318

U.S.MAIL

4950/TZS
Wright-Patterson AFB, Ohio 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.