INCH-POUND

MIL-C-55021B
16 April 1991
SUPERSEDING
MIL-C-55021A
10 December 1965

MILITARY SPECIFICATION

CABLE, ELECTRICAL, SHIELDED SINGLES, SHIELDED AND JACKETED SINGLES, TWISTED PAIRS AND TRIPLES, INTERNAL HOOKUP

GENERAL SPECIFICATION FOR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers electrical cables consisting of unshielded and unjacketed, shielded, jacketed, or shielded and jacketed twisted pairs and triples, and shielded or shielded and jacketed singles. The cable is intended for internal wiring of electrical equipment for application temperatures of -40°C to 105°C, or -65°C to 200°C.


1.2 Classification

1.2.1 Type designation. The type designation of cable shall be in the following form, and as specified (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Electronic Support Division AFLC, 2750 ABW/ES, Gentile AF Station, Dayton, OH 45444-5400 using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 6145
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:17Z
Check the source to verify that this is the current version before use.

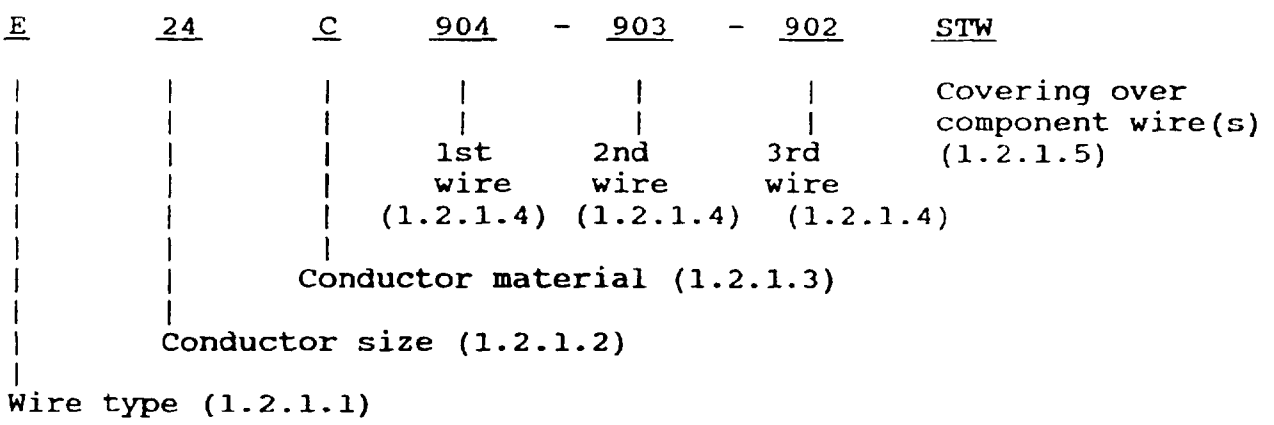

Type designation example: E24C904-903-902STW

1.2.1.1 Type of wire. The type of wire is identified by a one or two-letter symbol as specified in table I.

TABLE I. Type of wire.

Symbol type	Wire 1/ specification	Conductor 2/ size	Voltage 2/ rating	Maximum 2/ temp. rating
B	MIL-W-16878/1	14 to 32 AWG	600 V	105°C
C	MIL-W-16878/2	12 to 26 AWG	1000 V	105°C
D	MIL-W-16878/3	1/0 to 24 AWG	3000 V	105°C
E	MIL-W-16878/4	10 to 32 AWG	600 V	200°C
EE	MIL-W-16878/5	6 to 32 AWG	1000 V	200°C
BJ	MIL-W-16878/17	14 to 32 AWG	600 V	105°C
CJ	MIL-W-16878/18	12 to 26 AWG	1000 V	105°C
DJ	MIL-W-16878/19	1/0 to 24 AWG	3000 V	105°C

1/ MIL-W-16878 shall not be used for aerospace equipment.
2/ For information only.

1.2.1.2 Conductor size. The conductor size is identified by a one or two digit number which indicates the American Wire Gauge (AWG) size.

1.2.1.3 Conductor material. The conductor material is identified by the letter "C" for copper or the letter "S" for copper clad steel or "H" for high strength copper alloy.

1.2.1.4 Color code. The color code of each individual wire is identified by a number built up from the digits designating the colors as specified in 3.3.1. For single shielded and single shielded and jacketed constructions a dash shall not be used. The color code designators for wires 2 and 3 of a twisted pair and triplet are separated by a dash. Two groups of numbers indicate a twisted pair, three groups indicate a twisted triple. Any order of color code designators is acceptable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:17Z
Check the source to verify that this is the current version before use.

1.2.1.5 Construction of covering over the finished cable. The covering of the finished cable is identified by a one, or two, or three letter symbol, following the color code, as indicated below.

Symbol 1/	Covering over finished cable
U	Unjacketed and unshielded
P	Polyvinyl chloride (PVC) jacket
F	Fluorinated ethylene propylene (FEP) jacket
J	Polyamide jacket
T	Polytetrafluoroethylene (PTFE) jacket
S	Shielded and unjacketed
SF	Shielded and covered with FEP jacket
SP	Shielded and covered with PVC jacket
SJ	Shielded and covered with Polyamide jacket
STW	Shielded and covered with wrapped PTFE jacket
STX	Shielded and covered with extruded PTFE jacket

1/ All single conductor constructions must include an "S" in the type designation; jacket is optional.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-C-12000	-	Cable, Cord, and Wire, Packaging and Packing of.
MIL-W-16878	-	Wire, Electrical, Insulated, General Specification for.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:17Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-228	-	Cable and Wire, Insulated; Methods of Testing.
FED-STD-313	-	Material Safety Data Sheets Preparation of the Submission of.

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-681	-	Identification Coding and Application of Hookup and Lead Wire.

(Unless otherwise indicated, copies of the federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D3032	-	Hookup Wire Insulation, Standard Methods of Testing.
ASTM D4066	-	Nylon Injection and Extrusion Materials (PA).
ASTM F777	-	Resistance of Electrical Wire Insulation Materials to Flame at 60 Degrees.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications, specification sheets, or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:17Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Specification sheets. The individual cable requirements shall be as specified herein and in detail specification sheets. In the event of any conflict between the requirements of this specification and the detail specification sheets, the latter shall govern.

3.1.1 First article. When specified (see 6.2) a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.5.

3.2 Material. Materials shall be as specified herein. All materials used in the manufacture of cables furnished hereunder shall be of such quality and form that the finished product conforms to the requirements of this specification. All materials used shall conform to the requirements specified herein.

3.2.1 Basic wire. All basic wires used in the construction of the cable shall be of the same type (see 1.2.1.1). All basic wires shall be constructed and tested in accordance with MIL-W-16878.

3.2.2 Shielding. When specified, cable shield strands shall be the size specified below. The cable core shall be based on the basic wire diameter times 1.0 for singles, 1.64 for pairs, and times 1.95 for triples. The metallic coating of the copper strands of the shield shall be the same as the metallic coating of the conductor of the basic wire. Shield coverage and braid angle shall be determined with the formula in 4.6.13, and shall be specified in the detail specification.

Cable O.D.	Shield size
.000 to .060 inch	38 AWG
.061 to .310 inch	36 AWG
.311 to .750 inch	34 AWG
.751 inch or larger	32 AWG

3.2.3 Cable jacket. The cable jacket shall be as specified herein or in the applicable detail specification.

3.3 Design and construction.

3.3.1 Color coding. Unless otherwise specified, (see 6.2), color coding of individual wires and jackets shall be in accordance with MIL-STD-681.

3.3.2 Wire twist (twisted pairs and triples). The basic wires shall be grouped together and cabled so that the individual wire is not twisted and a minimum overall diameter is obtained. No fillers shall be used unless otherwise approved by the procuring activity.

3.3.2.1 Direction of lay. The direction of lay may be a left hand or right hand lay.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:17Z
Check the source to verify that this is the current version before use.

3.3.2.2 Length of lay. The length of lay shall be as specified in the applicable detail specification.

3.3.3 Covering over finished cable.

3.3.3.1 Shield. When a shield is specified in the cable construction (see 1.2.1.5), it shall be applied over the wire(s) as specified herein or in the applicable detail specification.

3.3.3.2 Jacket. When a jacket is specified in the cable construction (see 1.2.1.5), it shall be applied over the shielded or unshielded construction as specified herein or in the applicable detail specification.

3.3.3.3 Jacket material.

3.3.3.3.1 Polyamide. Polyamide jackets shall be applied concentrically and shall have a wall thickness as specified in the applicable detail specification. Polyamide material shall be in accordance with ASTM D4066, type PA 622, grade E 22.

3.3.3.3.2 Polyvinyl chloride. Polyvinyl chloride jackets shall have a wall thickness as specified in the applicable detail specification. The tensile strength and elongation of the jacket shall be 1800 psi minimum and 150 percent minimum, respectively, and shall be tested in accordance with 4.6.9.

3.3.3.3.3 Fluorinated ethylene propylene (FEP). FEP jackets shall have a wall thickness as specified in the applicable detail specification. The tensile strength and elongation of the jacket shall be 3000 psi minimum and 200 percent minimum, respectively, and shall be tested in accordance with 4.6.9.

3.3.3.3.4 Extruded or taped polytetrafluoroethylene (PTFE). Extruded or taped PTFE jackets shall have a wall thickness as specified in the applicable detail specification. The tensile strength and elongation of the jacket shall be 3000 psi minimum and 150 percent minimum, respectively, and shall be tested in accordance with 4.6.9.

3.4 Functional characteristics.

3.4.1 Dielectric strength.

3.4.1.1 Unshielded cable. The unshielded cable shall withstand for one minute, without breakdown, the applicable voltage specified in table II, and shall be tested in accordance with 4.6.2.1.

3.4.1.2 Shielded cable. The shielded cable shall withstand for one minute, without breakdown, the applicable voltage specified in table II, and shall be tested in accordance with 4.6.2.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:17Z
Check the source to verify that this is the current version before use.

TABLE II. Dielectric strength voltage.

Type of wire	Basic wire spec	Conductor size	Volts(rms)
B & BJ	MIL-W-16878/1&/17	32 to 14 AWG	2000
C & CJ	MIL-W-16878/2&/18	26 to 12 AWG	3000
D & DJ	MIL-W-16878/3&/19	24 to 1/0 AWG	6000
E	MIL-W-16878/4	32 to 10 AWG	2000
EE	MIL-W-16878/5	32 to 6 AWG	3000

3.4.2 Cold bend.

3.4.2.1 Unshielded cable. Unless otherwise specified by the procuring activity, cold bend requirements are not applicable for unshielded cable constructions.

3.4.2.2 Shielded cable. All shielded and shielded and jacketed cable constructions shall withstand the cold bend test of 4.6.3, and shall exhibit no cracking of the insulation, jacket material, or any other cable components. The cable shall withstand the dielectric strength requirements of 4.6.2.2 after bending.

3.4.3. Conductor continuity. Each conductor shall show no discontinuity when tested in accordance with 4.6.7.

3.4.4 Concentricity of extruded jackets. The concentricity of extruded jackets shall not be less than 70 percent when tested in accordance with 4.6.10.

3.4.5 Spark. All jacketed and shielded and jacketed cables shall withstand, without breakdown the spark test specified in 4.6.4.

3.4.6 Dielectric immersion. The finished cable shall withstand the dielectric immersion test specified in 4.6.5, without insulation breakdown or damage.

3.4.7 Heat resistance. When the cable is subjected to the heat resistance test as specified in 4.6.6, shrinkage of the conductor insulation shall not be greater than .125 inch (3.175 mm). Upon completion of the heat resistance test, the cable shall meet the dielectric strength requirements specified in 3.4.1.

3.4.8 Low-temperature storage. The cable shall be capable of operating satisfactorily after subjection to a low-temperature storage test as specified in 4.6.7. Following the test, the cable shall meet the dielectric strength requirements specified in 3.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:17Z
Check the source to verify that this is the current version before use.

3.4.9 Flammability. Cable specimens with all jacket materials loaded with sufficient weight to remain taunt throughout test shall not burn for more than 30 seconds, nor more than 3.0 inches (76.2 mm) when tested in accordance with 4.6.12.

3.5 Cable identification. The method of identification shall be compatible with the cable construction (see 1.2.1). Identification shall be at intervals of one to three feet and may be by marking of the outer jacket or tape placed beneath the shield or jacket. All materials used for identification shall conform to the environmental requirements of the particular construction. The identification shall be clear and legible and shall include the following where practicable:

MIL-C-55021/(add detail specification number and revision), manufacturer's name or CAGE code, type designation, and year of manufacture.

EXAMPLE: MIL-C-55021/2B Blank Manufacturers name
E24C904-903-902SF 1989

Finished unjacketed/unshielded cable shall be identified with the printed marking of a contrasting color applied to the surface of any of the wires in a multiconductor cable (see example above). The size of the printed characters shall be compatible with the basic wire size. No other printed marking shall be applied to the basic wire.

3.6 Workmanship. Uniformity of shape and performance shall permit interchangeability of the cable. There shall be no kinks, splints, cuts, cracks, abrasions, or other injurious defects. The basic wire(s) in the cable shall be free from any imperfections which can affect performance. The cable shall be free of foreign material.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contact or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Governments. The government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:17Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items meet all requirements of sections 3 and 5. The inspection set froth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of the manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).
b. Quality conformance inspection (see 4.5)

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in FED-STD-228.

4.4 First article inspection. First article inspection shall consist of all quality conformance tests of 4.5 and the tests specified in table IV. The contractor shall prepare a first article test report in accordance with the data ordering document (see 6.2).

4.4.1 Specimen. The sample length shall be as specified in the sampling plan (see 6.2).

4.4.2 Failures. One or more failures shall be cause for rejection of the first article sample.

4.5 Quality conformance inspection. Quality conformance inspection shall consist of the individual and sampling tests of table III and shall be performed on each lot of cable produced under this specification.

4.5.1. Inspection lot. A lot shall consist of all cables of one type and size made under the same essential conditions, produced on a substantially continuous basis, and offered for inspection at one time.

4.5.1.1 Unit of product. The unit of product for determining lot size for sampling shall be one continuous length of cable as offered for inspection.

4.5.1.2 Sample unit. A sample unit shall consist of one of the individual lengths of the sample. Each sample unit shall be of sufficient length to permit the performance of all applicable inspections or tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:17Z
Check the source to verify that this is the current version before use.

4.5.1.3 Specimen. A specimen shall consist of a piece of one sample unit upon which a particular inspection or test is made.

4.5.2 Inspection levels. One hundred percent of all finished cable must be subjected to the individual tests of table III. Inspection level for sampling plan tests of table III shall be in accordance with MIL-STD-105 inspection level S-4, AQL 4.0.

4.5.3 Resubmitted inspection lots. MIL-STD-105 shall apply except that a resubmitted lot shall be inspected by the contractor using tightened inspection. Before resubmitting, full particulars concerning the cause of previous rejections and the action taken to correct the defects found in the lot shall be furnished by the contractor to the acquiring activity.

4.5.4 Inspection of packaging. Preservation, packaging, packing, and marking shall be inspected to determine compliance with the requirements of MIL-C-12000.

TABLE III. Quality conformance tests.

Test	Requirement paragraph	Test paragraph
Individual tests		
Basic wire	3.2.1	---
Conductor continuity	3.4.3	4.6.8
Spark test	3.4.5	4.6.4
Sampling tests		
Jacket wall thickness	Detail specification	4.6.11
Shield coverage	3.2.2	4.6.13
Jacket concentricity	3.4.4	4.6.10
Visual and mechanical	Detail specification	4.6.1
Jacket tensile and elongation	3.3.3.3	4.6.9
Dielectric strength (shielded and unshielded)	3.4.1.1 and 3.4.1.2	4.6.2.1 and 4.6.2.2

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:17Z
Check the source to verify that this is the current version before use.

TABLE IV. First article tests.

Test	Requirement paragraph	Test paragraph
Cold bend	3.4.2	4.6.3
Dielectric immersion	3.4.6	4.6.5
Heat resistance	3.4.7	4.6.6
Low-temperature storage	3.4.8	4.6.7
Flammability	3.4.9	4.6.12

4.6 Methods of inspection.

4.6.1 Visual and mechanical examination. Finished cable shall be examined to determine that the materials, construction, physical dimensions, marking, and workmanship are in accordance with the applicable requirements (see 3.1, 3.2, 3.3, 3.5, and 3.6)

4.6.2 Dielectric strength.

4.6.2.1 Unshielded cable. The unshielded cable shall be tested in accordance with method 6111 of FED-STD-228 between each conductor and other conductors in accordance with applicable voltage specified in table II. Immersion is required for a minimum period of 4 hours for unshielded/unjacketed cables. Immersion is not required for jacketed cables.

4.6.2.2 Shielded cable. The shielded cable shall be tested in accordance with method 6111 of FED-STD-228. The applicable test voltage (see table II) shall be applied between the conductor and shield for singles and between each conductor and the other conductors and shield in common for pairs and triples. Immersion is not required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:17Z
Check the source to verify that this is the current version before use.

4.6.3 Cold bend. Specimens of the finished cable shall have each conductor stripped, approximately one inch (25.4 mm) at each end, to the bare conductor and shall have one end attached to a mandrel and the other end weighted. After conditioning for 4 hours at a temperature of -40°C plus or minus 2°C, and while maintained at this temperature, the cable shall be wrapped around a mandrel having a maximum diameter that is 15 times the finished cable diameter at a uniform rate of fifteen revolutions per minute (rpm) for three complete turns. After bending and before straightening, the cable shall be subjected to the dielectric strength test specified in 4.6.2.

4.6.4 Spark test. The spark test shall be conducted in accordance with method 6211 of FED-STD-228. The spark test voltage shall be 1500 volts (rms).

4.6.5 Dielectric immersion (jacketed or shielded and jacketed cable). The cable sample shall be immersed in tap water containing 0.5 percent, by volume, of a suitable wetting agent, except for six inches on each end. The cable shall be soaked for a minimum period of four hours in the water solution maintained at 25°C. The shield of the shielded and jacketed cable or the conductors of the jacketed cables shall be electrically connected and subjected to a potential of 2000 volts (rms) between them and the water solution.

4.6.6 Heat resistance. Unless otherwise specified by the detail specification, the specimen of finished cable shall be subjected to an air oven temperature of 105°C (221°F) for 96 hours. The cable specimen shall then be removed from the oven and allowed to return to room temperature. The length of exposed conductor, if any, at each end of the specimen shall be considered as shrinkage of the insulation. In no case shall the shrinkage at either end exceed the maximum value specified in 3.4.7 or in the detail specification. After 1 hour at room temperature, the cable specimen shall be wound two close turns around a mandrel having a maximum diameter that is ten times the cable diameter. While in the wound position, the cable shall be subjected to the dielectric test of 4.6.2.

4.6.7 Low-temperature storage. The cable specimen shall be placed in a temperature chamber at a temperature of -62°C (-80°F) for a minimum of 72 hours. Upon completion of the 72 hour exposure, the cable shall be allowed to stabilize at normal room temperature and then shall be tested for dielectric strength as specified in 4.6.2.

4.6.8 Conductor continuity. An ohmmeter or other suitable low-voltage device shall be used to check the continuity of each conductor. There shall be no indication of discontinuity.

4.6.9 Jacket tensile strength and elongation. Jacket materials requiring tensile strength and elongation testing shall be tested in accordance with ASTM D3032, using 1-inch bench marks, a 1-inch initial jaw separation, and a jaw separation speed of 2 inches per minute.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:17Z
Check the source to verify that this is the current version before use.

4.6.10 Jacket concentricity. The minimum wall thickness is a cross section of the extruded jacket shall be located and recorded. The maximum wall thickness of the jacket in this same cross section shall be measured and recorded. The ratio of the minimum wall thickness to the maximum wall thickness times 100 shall be defined as the percent concentricity.

4.6.11 Jacket wall thickness. The jacket wall thickness shall be measured in accordance with method 1013 of FED-STD-228 except for tape wrapped jacket constructions. For tape wrapped jacket constructions use method 1018 of FED-STD-228.

4.6.12 Flammability. Finished cable shall be tested in accordance with ASTM F777. The period of flame application shall be 30 seconds for cables having wires of size 10 AWG or smaller. Cables with larger wires than 10 AWG shall not be tested.

4.6.13 Braid angle and shield coverage. The shield braid angle and the percent coverage of the braid shall be determined by the following formula:

$$\text{Tan } a = \frac{2\pi (D+2d) P}{C}$$

$$k = 100 (2f - f^2)$$

Where:

k = percent coverage
f = EPd/sin a
P = picks per inch of cable length
a = angle of braid with axis of cable
E = number of strands per carrier
d = diameter of one shield strand
D = diameter of cable under shield*
C = number of carriers

* = basic wire diameter X geometry cable factor
geometry cable factor: 1.0 for singles
1.64 for pairs
1.95 for triples

5. PACKAGING

5.1 Preservation, packaging, packing and marking. Unless otherwise specified by the acquisition activity (see 6.2), the cables shall be cleaned, preserved, packaged, packed, and marked in accordance with MIL-C-12000.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:17Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of general or explanatory nature that may be helpful but is not mandatory.)

6.1 Intended use. Cables covered by this specification are used in the hook-up of various electronic assemblies as specified in the detail specifications.

6.1.1 Polyvinyl chloride jacketed cable. Polyvinyl chloride jacketed cable is intended for use at temperatures between -40 and 105°C.

6.1.2 Polyamide jacketed cable. Polyamide jacketed cable is intended for use at temperatures between -40 and 105°C.

6.1.3 Polytetrafluoroethylene jacketed cable. Polytetrafluoroethylene jacketed cable is intended for use at temperatures between -65 and 200 °C.

6.1.4 Fluorinated ethylene propylene jacketed cable. Fluorinated ethylene propylene jacketed cable is intended for use at temperatures between -65 and 200°C.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Title, number, and date of applicable detail specification.

c. Complete type designation (see 1.2.1).

d Color-coding method if other than specified (see 3.3.1).

e. Length of cable required.

f. If first article is required. (see 3.1.1 and 4.5.1).

g. First article sample plan (see 4.4).

h. Preservation, packaging, packing, and marking method if other than specified (see 5.1).

i. Levels and methods of inspection, if other than specified.

j. Jacket color.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:17Z
Check the source to verify that this is the current version before use.

6.3 First article inspection. Invitations for bids should provide that the government reserves the right to waive the requirement for samples for first article inspection as to those bidders offering a product which has been previously acquired or tested by the government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior government approval is presently appropriate for the pending contract.

6.4 Supersession data. Shown below is a representation of cable type designations and Part or Identifying Number (PIN) that exist in MIL-C-55021 Rev A and MIL-C-27072 that will be superseded as follows:

Original type designations	New type designations
EC24T90-95STX	E24C90-95STX
EC24U90-95STX	E24C90-95STX
EC24B90-95STX	E24C90-95STX
BC24P90-95SP	B24C90-95SP
BC24J90-95SJ	B24C90-95SJ
BC24SP90-95SP	B24C90-95SP
BC24SJ90-95SJ	B24C90-95SJ
EC24STW90-95STW	E24C90-95STW
EC24STX90-95STX	E24C90-95STX
EC24U9-0***	E24C9-0***

Original PIN's	New type designations
M27072/90-N9	E24C9SS
M27072/91-M9	E22C9SF
M27072/93-M9	B22C9SP
M27072/96-P9	B24C9SJ
M27072/99-M9	C22C9SP
M27072/101-P9	C24C9S
M27072/103-M9	D22C9SP
M27072/104-M9	E22C9SP
M27072/105-P9	E24C9SJ
M27072/106-L9	EE22C9SJ
M27072/107-N9	C24C9SJ
M27072/109-N9	EE22C9SJ
M27072/112-M9	D22C9S
M27072/114-N9	B24C9S
M27072/120-K9	D20C9SJ
M27072/122-M9	EE24C9S
M27072/125-M9	EE22C9SP
M27072/126-L9	E22C9STW
M27072/127-L9	EE24C9STW

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:17Z
Check the source to verify that this is the current version before use.

6.4.1 Superseded documents. The documents referenced below are documents that are superseded and shall be replaced as follows:

Superseded documents	Replacement documents
MIL-C-55021 (Ord)	MIL-C-55021/1
MPD 1507	MIL-C-55021/2
MPD 9171	MIL-C-55021/3
MIL-C-27072/93	MIL-C-55021/1
MIL-C-27072/96	"
MIL-C-27072/99	"
MIL-C-27072/101	"
MIL-C-27072/103	"
MIL-C-27072/107	"
MIL-C-27072/112	"
MIL-C-27072/114	"
MIL-C-27072/120	"
MIL-C-27072/90	MIL-C-55021/2
MIL-C-27072/91	"
MIL-C-27072/104	"
MIL-C-27072/105	"
MIL-C-27072/106	"
MIL-C-27072/109	"
MIL-C-27072/122	"
MIL-C-27072/125	"
MIL-C-27072/126	"
MIL-C-27072/127	"

6.4.2 Superseded wire types. The wires types listed below are superseded by the following replacement wire types:

Superseded wire type	Replacement wire type
LW	B
MW	C
HW	D

6.5 Subject key word listing.
Polyamide
Polyvinyl chloride
Polytetrafluoroethylene
Shielding
First article
Twisted pairs and triples

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:17Z
Check the source to verify that this is the current version before use.

6.6 Hazardous materials and waste. Caution should be taken during handling and disposal of all insulating and jacketing materials in accordance with FED-STD-313.

CONCLUDING MATERIAL

Custodians:
Army - MI
Navy - AS
Air Force - 85

Review activities:
Army - AR, CR
Air Force - 11
DLA - IS

User activities:
Army - AL

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 6145-1199)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:17Z
Check the source to verify that this is the current version before use.