MILITARY SPECIFICATION

DISPENSER ASSEMBLY

This Specification is approved for use by the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Depertments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This Specification covers the performance and acceptance inspection requirements for the Dispenser Assembly associated with the M130 Aircraft General Purpose Dispenser.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specificd (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-S-45743	-	Soldering, Manual Type, High Reliability, Electrical and Electronic Equipment
MIL-S-46844	-	Solder Bath Soldering of Printed Wiring Assemblies
MIL-A-48078	-	Ammunition, Standard Qualtiy Assurance provisions, General specification For

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attribute
MIL-STD-810C	-	Environmental Test Methods

FSC 1095

Beneficial comments (recommendations, additions deletions) and pertinent data which may be of use in improving this document should be addressed to Commander. US Army Armament Research and Development Center, Attn DRSMC-QA, Dover. New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWINGS (See 6.5)

U.S. ARMY ARMAMENT RESEARCH AND DEVELOPMENT CENTER

9311434	- Dispenser Assembly
9312790	- Packing and Marking for Drum, Metal, Shipping for Dispenser Assembly and Payload Module Assembly
9321248	- Packing and Marking for Box, Exterior For Dispenser Assembly
9313708	- Packing and Marking for Drum, Metal, Shipping for M130 Aircraft General Purpose Dispenser

INSPECTION EQUIPMENT DRAWINGS

9354498	- Inert Flare For the M130 Aircraft General Purpose Dispenser
9280367	- Test Set-Up For Burn-In Tests (Dispenser Assembly)
9200368	- Test Set-Up For Functional Test (Dispenser Assembly)

U.S. ARMY ARMAMENT, MUNITION AND CHEMICAL COMMAND

1948-4136/109-20 PA1000	- Unitization Procedures for Boxed Ammunition and Components on Skidded Bases

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer).

2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Materials. Materials shall be un accordance wiith the applicable drawings, specifications and standards.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.

3.2 Components and Assemblies. The components and assemblies shall comply with all requirements specified on Drawing 9311434 and all associated drawings and with all requirements specified in applicable specifications.

3.3 Functioning. The dispenser assembly, having successfullY completed burn-in See 4.5.7) shall perform as specified herein.

3.3.1 Power up. The dispenser assembly shall perform as specified herein when powered up to a voltage of 22.5-30 VDC.

3.3.2 Reset. The dispenser assembly shall reset to the home position (first firing pulse after reset shall be No. 1 on the breech plate) when the breech reset button is momentarily depressed

3.3.3 Output. The dispenser assembly, in both the chaff and flare modes, upon input of thirty (30) dispenser pulses conforming to Figure 1, shall output 30 firing pulses, in the order indicated on the breech plate. Each firing pulse shall be 5.0 ± .75 amperes DC., for 15 milliseconds minimum duration into a resistive load of 1.0 + 0.1 ohm.

3.3.4 Power loss. In the event that power to the dispenser is momentarily interrupted, the dispenser assembly shall retain the location of the next position to be fired in the sequence.

3.3.5 Flare detection signal. In the flare mode, upon flare ignition, the dispenser assembly shall provide a signal of 6.5 volt DC. minimum into a resistive load of 330 ohms.

3.3.6 Stray voltage. There shall be no stray voltage across a 3.0 + 0.5 ohm load between any of the 30 firing pins and ground when the dispenser assembly is powered up. (Voltage readings of less than 1 volt for less than 3 seconds duration is acceptable).

3.4 Environmental requirements. The dispenser assembly shall perform as specified in 3.3 after exposure to the environments specified herein.

3.4.1 Helicopter vibration. The dispenser assembly shall Perform all functions satisfactorily after being subjected to the vibration requirements of MIL-STD-810C, when tested as specified in 4.5.4. The dispenser shall be vibrated along three mutually perpendicular axes as shown in Figure 2. The payload module shall be loaded with 30 inert flares for this test.

3.4.2 Transportation vibration. The dispenser assembly shall perform all functions satisfactorily after being subjected to the transportation vibration requirements of MIL-STD-810C, when tested as specified in 4.5.5.

Source: https://assist.dla.mil -- Downloaded: 20261O-23T02:16Z
Check the source to verify that this is the current version before use.

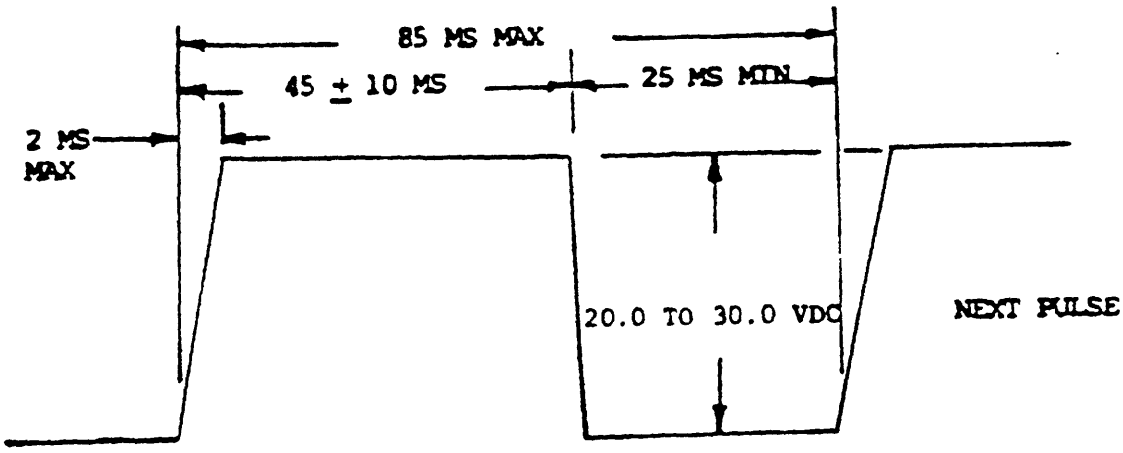


Figure 1 Dispense pulse

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.

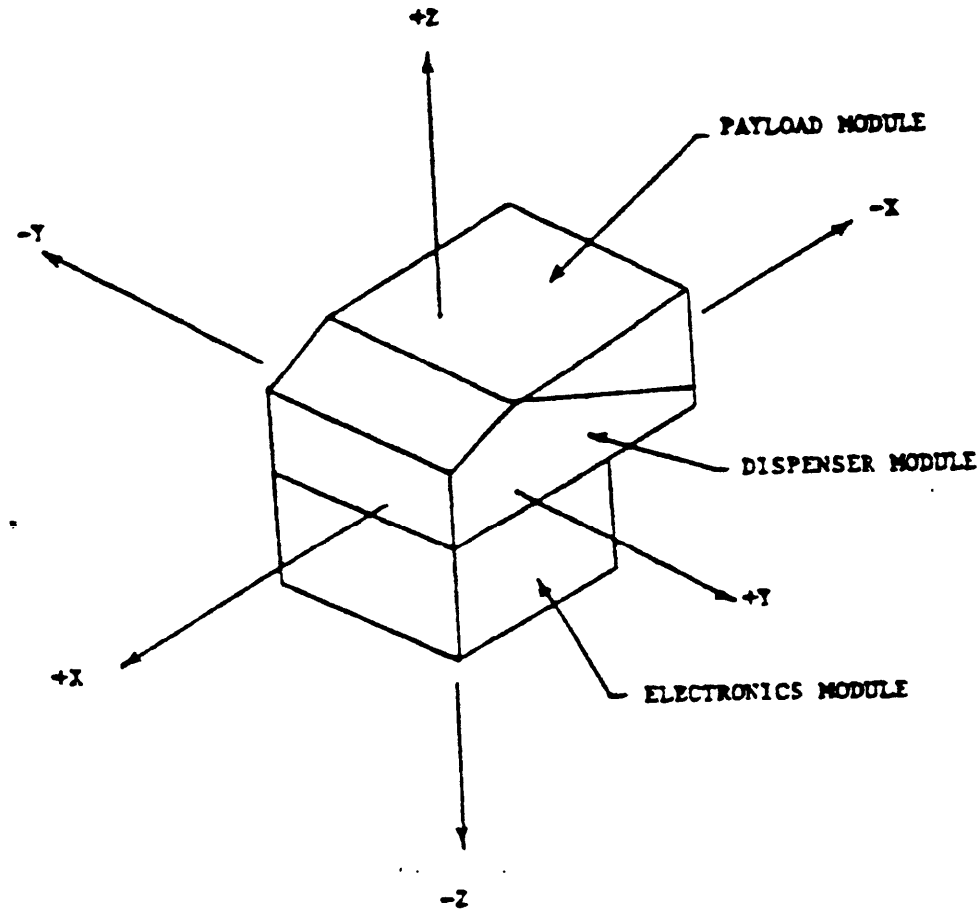


Figure 2. Dispenser system test axis orientation

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.

3.4.3 Humidity. The dispenser assembly shall perform all functions satisfactorily after being subjected to MIL-STD-810C, Test Method 507.1, Procedure I, (10 days).

3.4.4 High temperature. The dispenser assembly shall perform all functions satisfactorily at +54°C according to MIL-STD-810C, Test Method 501.1

3.4.5 Low temperature. The dispenser assembly shall perform all functions satisfactorily at -54°C according to MIL-STD-810C, Test Method 502.1

3.5 Wiring and soldering. Soldering of electrical wires, cables, connectors, components and assemblies shall be performed in a thorough, workmanlike manner in accordance with MIL-S-45743 and MIL-S-46844. (Also See 3.8)

3.6 Seal integrity. The sequencer assembly, subassembly of the dispenser assembly shall show no evidence of leakage when tested in accordance with 4.5.8.

3.7 First article inspection. This specification contains technical provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

3.8 Cleanliness. Work areas and tools shall be maintained in a clean and orderly condition. All dirt, grease, oil, solder splatter, chips and other contaminating foreign matter shall be promptly removed. Cleaned component leads, terminals, etc., shall not be handled with bare hands. The use of white lint free gloves is recommended. Smoking, eating or drinking shall not be permitted at any soldering bench or station.

3.9 Workmanship. All parts and assemblies shall be fabricated, loaded and finished in a thorough workmanlike manner, and all manufacturing, processing, and assembling operations shall be correctly performed. They shall be clean and free of burrs, sharp edges, unblended radii, surface defects, chips, dirt, grease and oil (except where specifically required), corrosion products and other foreign matter. The cleaning method used shall not be injurious to any part, nor shall they be contaminated by the cleaning agent. Exterior surface coatings shall be continuous except for a few light scratches not exposing base material. All required markings shall be neat and sharply defined. Required packing shall be dry.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection and standard quality assurance provisions. Unless otherwise specified herein, or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this detail specification.

4.2 Classification of inspections. The following types of inspections shall be conducted on this item.

a. First Article Inspection
b. Quality Conformance Inspection

4.3 First article inspection

4.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with the provisions of 4.3.2 and 4.3.3. The first article sample shall consist of the following items in sample quantities as indicated.

Part Description	Drawings	Quantity
Dispenser Assembly	9311434	2

4.3.2 Inspections to be performed. See MIL-A-48078 and paragraphs 4.4.2.1 through 4.4.2.18 and Table I specified herein.

4.3.3 Rejection. See MIL-A-48078.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-D-63123B(AR)

PARAGRAPH	TITLE: Dispenser Assembly		SHEET 1 OF 1		DRAWING NUMBER: See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Sequencer Assembly (Dwg. 9311443)				
	Seal integrity	2		3.6	4.5.8
	Dispenser Assembly (Dwg. 9311443)				
	Examination for defects	2		3.2	4.4.2.14(a)
	Burn-in	2		3.3	4.5.7
	Functioning	2		3.3	4.5.1
	Transportation vibration	2		3.4.2	4.5.5
	Aircraft vibration	2		3.4.1	4.5.4
	Humidity	2		3.4.3	4.5.6
	Performance at low temperature	2		3.4.5	4.5.3
	Performance at high temperature	2		3.4.4	4.5.2
	Examination for defects	2		3.2	4.4.2.14(a)

NOTES: The above tests shall be performed in the order indicated. The two units submitted to environmental testing shall not be returned to the deliverable lot.
(a) Delete Major 105 from 4.4.2.14 for First Article Inspection.

DRSMC-QA (1) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 202610-23T02:16Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection

4.4.1 Inspection lot formation. Inspection lots shall comply with the lot formation provisions of MIL-A-48078.

4.4.2 Examination. (See MIL-A-48078). Unless otherwise specified in the Classification of Defects and Test Tables, sampling plans for major and minor defects shall be in accordance with MIL-STD-105, Inspection Level II. Equipment necessary for the performance of the inspections listed shall be in accordance with 4.4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-63123B(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.1	Cover Assembly, Dispenser		9311426
			NEXT HIGHER ASSEMBLY 9311434

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Total length, max.		0.40%	3.2	Gage
102	Weld incomplete or inadequate		0.40%	3.2	Visual
Minor					
201	Protective finish missing or inadequate		0.65%	3.2	Visual
202	Marking missing or improper		0.65%	3.2	Visual
203	Poor workmanship		1.00%	3.9	Visual

NOTES:

DRSMC-QA [illegible] Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-63123B(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.2	Plate, Mounting, Dispenser				9311427
					NEXT HIGHER ASSEMBLY 9311434
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Position of mounting holes (Dispenser Assembly to Electronic Module)		0.40%	3.2	Gage
102	Interior dimensions (length & width)		0.40%	3.2	Gage
Minor					
201	Protective finish missing or inadequate		0.65%	3.2	Visual
202	Poor workmanship		1.00%	3.9	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-63123B(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.3	Breech Plate Assembly				9311428
					NEXT HIGHER ASSEMBLY
					9311437
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Total length		0.40%	3.2	Gage
102	Total width		0.40%	3.2	Gage
103	Position of dowel pins (2)		0.40%	3.2	Gage
104	Position of bores (2)		0.40%	3.2	Gage
105	Position of electrical contact holes (30)		0.40%	3.2	Gage
106	Position of mounting screw holes (2)		0.40%	3.2	Gage
Minor					
201	Poor workmanship		1.00%	3.9	Visual

NOTES:

DRSMC-OA Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-63123B(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.4	Breech Assembly				9311437
					NEXT HIGHER ASSEMBLY 9311434
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Components loose, damaged, missing or improperly mounted		0.40%	3.2	Visual
102	Height of grounding spring improper		0.40%	3.2	Gage
103	Soldering improper		100%	3.5	4.4.3.7/Visual
Minor					
201	Poor workmanship		1.00%	3.9	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-63123B(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.5	Sequencer Assembly (Prior to Securing Sequence Cover)				9311443
					NEXT HIGHER ASSEMBLY 9311434
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Any component damaged, missing or improperly assembled		0.40%	3.2	Visual
102	Gasket sealing compound missing or inadequate		0.40%	3.2	Visual
103	Thread not coated with sealing compound		0.40%	3.2	Visual
Minor					
201	Poor workmanship		1.00%	3.9	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.6	Printed Wiring Board Assembly, Sequence Switch				9311464
					NEXT HIGHER ASSEMBLY 9311443
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Conformal coating missing or improper		0.40%	3.2	Visual
102	Insulating compound missing or improper		0.40%	3.2	Visual
103	Orientation of connector receptable polarizing keyway, improper		0.40%	3.2	Visual
104	Any component loose, damaged, missing or improperly mounted		0.40%	3.2	Visual
105	Soldering improper		100%	3.5	4.4.3.7/Visual
Minor					
201	Poor workmanship		1.00%	3.9	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-D-63123B(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.7	Cover, Housing, Sequencer		9311482
			NEXT HIGHER ASSEMBLY 9311443

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Overall length, width, height		0.40%	3.2	Gage
Minor 201	Protective finish missing or inadequate		0.65%	3.2	Visual
202	Marking missing, illegible or incorrect		0.65%	3.2	Visual
203	Poor workmanship		1.00%	3.9	Visual

NOTES:

...03 replaces edition of 1 Jul 77 ...ch may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 202610-23T02:16Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-63123B(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.8	Housing Assembly, Sequencer				9311484
					NEXT HIGHER ASSEMBLY 9311443
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Total length, max.		0.40%	3.2	Gage
* 102	Total width, max.		0.40%	3.2	Gage
Minor					
201	Protective finish missing or inadequate		0.65%	3.2	Visual
202	Poor workmanship		1.00%	3.9	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 202610-23T02:16Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-63123B(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.9	Plate Assembly, Sequencer				9311488
					NEXT HIGHER ASSEMBLY 9311443
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Any component missing, damaged or improperly assembled		0.40%	3.2	Visual
102	Adhesive potting missing or inadequate		0.40%	3.2	Visual
103	Soldering improper or inadequate		100%	3.5	4.4.3.7/Visual
Minor					
201	Poor workmanship		1.00%	3.9	Visual

NOTES:

DPSMC-DA Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-63123B(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.10	Flare Sensor Assembly				9311493
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Total length housing		0.40%	3.2	Gage
102	Potting missing or improper		0.40%	3.2	Visual
Minor					
201	Protective finish missing or inadequate		0.65%	3.2	Visual
202	Poor workmanship		1.00%	3.9	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-63123B(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.11	Contact, Spring Loaded, Electrical				9311514
					NEXT HIGHER ASSEMBLY 9311437
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Total length (free), min.		0.40%	3.2	Gage
102	Total travel (compressed), min.		0.40%	3.2	Gage
103	Spring force incorrect		0.40%	3.2	Gage
Minor					
201	Poor workmanship		1.00%	3.9	Visual

NOTES:

DD FORM 1720 (Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

20

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-63123B(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.12	Spring				9311516
					NEXT HIGHER ASSEMBLY 9311437
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
*101	Thickness, min.		0.40%	3.2	Gage
102	Height of tabs above mounting surface		0.40%	3.2	Gage
Minor					
201	Poor workmanship		1.00%	3.9	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 202610-23T02:16Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.13	Sequencer Assembly				9311443
					NEXT HIGHER ASSEMBLY 9311434
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Seal integrity		0.40%	3.6	4.5.8
Minor 201	Poor workmanship		1.00%	3.9	Visual

NOTES:

DPSMC-0(V) Form 160, 1 Aug 83 replaces edition of 1 Jul [illegible] which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-63123B(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.14	Dispenser Assembly				9311434
					NEXT HIGHER ASSEMBLY 9311430
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Any component missing, damaged or improperly assembled		0.40%	3.2	Visual
102	Identification plate missing or improperly annotated		0.40%	3.2	Visual
103	Sealing compound missing or inadequate		0.40%	3.2	Visual
104	Sleeving insulation missing or inadequate		0.40%	3.2	Visual
105	Burn-in	(a)	100%	3.3	4.5.1
106	Functioning test	(a)	100%	3.3	4.5.7
Minor					
201	Poor workmanship		1.0%	3.9	Visual

NOTES:

a. Tests to be performed in sequence indicated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-63123B(AR),

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.15	Packing and Marking for Box, Fiberboard for Dispenser Assembly				9321249
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Any packing component missing		0.40%	3.2	Visual
102	Packing not thoroughly dry		0.40%	3.2	Visual
103	Markings missing, incomplete or illegible		0.40%	3.2	Visual
Minor					
201	Box not securely closed		0.65%	3.2	Visual
202	Poor workmanship		1.00%	3.9	Visual

NOTES:

Source: https://assist.dla.mil - Downloaded: 2026-05-23T01:01:52Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-63123B(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.16	Sealed Barrier Bag, Prior to Packing in Box				9321248
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Waterproofness of barrier bag destroyed by puncture or separation of heat seal		0.40%	3.2	Visual
102	Excess air not exhaused from bag prior to sealing		0.40%	3.2	Visual
103	Evidence of crushed box (Note: Packing should be opened if there is evidence of crushing)		0.40%	3.2	Visual
Minor					
201	Heat seal of barrier bag located so that one or more subsequent seals cannot be applied		0.65%	3.2	Visual
202	Marking of bag incorrect or unidentifiable		0.65%	3.2	Visual
203	Poor workmanship		1.00%	3.9	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-63123B(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.17	Packing and Marking for Box, Exterior for Dispenser Assembly				9321248
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Barrier bag or filler missing		0.40%	3.2	Visual
102	Packing not thoroughly dry		0.40%	3.2	Visual
103	Exterior marking missing, incomplete or illegible		0.40%	3.2	Visual
Minor					
201	Poor workmanship		1.00%	3.9	Visual

NOTES:

DRSMC-QA Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS MIL-D-63123B(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.18	Packing and Marking for Drum, Metal Shipping for M130 Aircraft General Purpose Dispenser	1 OF 1	9313708
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Cushions missing or not secured		0.40%	3.2	Visual
102	Contents not thoroughly dry		0.40%	3.2	Visual
103	Any component missing or damaged		0.40%	3.2	Visual
Minor					
201	Markings missing, misleading or unidentifiable		0.65%	3.2	Visual
202	Fillers insufficient, loose contents		0.65%	3.2	Visual
203	Poor workmanship		1.00%	3.9	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 202610-23T02:16Z
Check the source to verify that this is the current version before use.

4.4.3 Testing

4.4.3.1 Functioning. Each dispenser assembly after compliance with 4.5.7 shall be subjected to this test. The test shall be performed as specified in 4.5.1 using equipment in accordance with 4.4.4. The dispenser excluding those conditioned at high or low temperature, shall be conditioned for four (4) hours minimum at 25 ± 5°C (Ambient). If any unit fails to comply with the requirements of 3.3 it shall be classified defective and removed from the lot.

4.4.3.2 High temperature. Each dispenser assembly submitted for first article shall be subjected to functioning at high temperature. The test shall be performed after Humidity testing (see 4.4.3.6) as specified in 4.5.2 using equipment in accordance with 4.4.4. If any unit fails to comply with the requirements of 3.4.4, the first article sample shall be rejected.

4.4.3.3 Low temperature. Each dispenser assembly submitted for first article shall be subjected to functioning at low temperature. The test shall be performed as specified in 4.5.3 using equipment in accordance with 4.4.4. If any unit fails to comply with the requirements of 3.4.5, the first article sample shall be rejected.

4.4.3.4 Helicopter vibration. Each dispenser assembly submitted for first artlcle testing shall be subjected to this test. The test shall be performed as specified in 4.5.4 using equipment in accordance with 4.4.4. If any unit fails to comply with the requirements of 3.4.1 the first article sample shall be rejected.

4.4.3.5 Transportation vibration. Each dispenser assembly submitted for first article testing shall be subjected to this test. The test shall be performed as specified in 4.5.5 using equipment in accordance with 4.4.4. If any unit fails to comply with the requirements of 3.4.2 the first article sample shall be rejected.

4.4.3.6 Humidity. Each dispenser assembly submitted for first article testing shall be subjected to this test. The test shall be performed as specified in 4.5.6 using equipment in accordance with 4.4.4. If any unit fails to comply with the requirements of 3.4.3 the first article sample shall be rejected. Following this test, the dispenser assembly shall be subjected to functioning at high and low temperature.

4.4.3.7 Soldering. Each dispenser assembly shall be inspected for soldering in accordance with 3.5. If any wiring or printed circuit card assembly fails to comply with the requirements of 3.5, the unit shall be classified defective and removed from the lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.

4.4.3.8 Seal integrity. (See 3.6) Each dispenser shall be tested as specified in 4.5.8. Any assembly that fails to comply with the requirement shall be classified defective and removed from lot.

4.4.4 Inspection equipment. The inspection equipment required to perform the inspections and tests prescribed in this specification is identified in the "Paragraph Reference/Inspection Method" column of the tables starting with paragraph 4.4.2.1, and the test paragraphs (See 4.5). The contractor shall submit impaction equipment designs in accordance with the terms of the contract. See Section 6 of MIL-A-48078, and section 6.3 herein.

4.5 Methods of inspection.

4.5.1 Functioning. Each Dispenser Assembly shall be subjected to testing, utilizing the functioning test system, and procedures described in Dwg. 9280368. Observation shall be made for compliance with the applicable requirement. (Non-Destructive Test)

4.5.2 High temperature. After conditioning at 54° ± 2°C according to MIL-STD-810C, Test Method 501.1, the dispenser assembly shall be subjected to the functioning test of 4.5.1 at high temperature. Observation shall be made for compliance with the applicable requirement. (Non-Destructive Test)

4.5.3 Low temperature. After conditioning at -54° ± 2°C according to MIL-STD-810C, Test Method 502.1, the dispenser assembly shall be subjected to the functioning test of 4.5.1 at low temperature. Observation shall be made for compliance with the applicable requirement. (Non-Destructive Test)

4.5.4 Helicopter vibration. This test shall be performed as specified in MIL-STD-810C, Method 514.2, Procedure IIc assuming the number of missions to be greater than 100. The payload module shall be loaded with thirty (30) inert flares for this test. The dispenser shall be vibrated along three mutually perpendicular axes as shown in Figure 2. Following this test, each dispenser assemble shall be examined for evidence of damage and submitted to the functioning test of 4.5.1. Observation shall be made for compliance with the applicable requirement (Non-Destructive Test)

4.5.5 Transportation vibration. This test shall be performed as specified in MIL-STD-810C, Method 514.2, Procedure X using curve AW of Figure 514.7 (change curve to 0.8″ displacement (double amplitude) between 5 & 6 Hz). The dispenser shall be vibrated along three mutually perpendicular axes as shown in Figure 2. Following this test, each dispenser assembly shall be examined for evidence of damage and submitted to the functioning test of 4.5.1. (Non-Destructive Test)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.

4.5.6 Humidity. This test shall be performed as specified in MIL-STD-810C, Test Method 507.1, Procedure I, (10 days). Following this test, each dispenser assembly shall be examined for evidence of damage and submitted to the functioning test of 4.5.1. (Non-Destructive Test)

4.5.7 Burn-in. Each Dispenser Assembly shall be subjected to testing utilizing the functioning test system and procedures described in Dwg. 9280367.

4.5.8 Seal integrity. Each sequencer assembly (9311443) shall be placed in a cylindrical air tight chamber with the free space minimized. The air pressure (moisture free) within the chamber shall be raised to a minimum of 5 psig by means of a fixed volume of air. With the air supply shut off the pressure shall be maintained for 15 seconds min. Any sequencer which fails to attain the minimum pressure specified or exhibits any leakage in excess of 0.05 psig shall be class defective and removed from the lot. (Non-Destructive Test)

5. PACKAGING

5.1 Preservation and packaging.

5.1.1 Level A. Preservation and packaging shall be as specified on Drawing 9321248 when shipped as a repair part; or Drawing 9313708 when shipped as part of the M130 Dispenser System.

5.2 Packing.

5.2.1 Level A. - Packing shall be as specified on Drawing 9321248 when shipped as a repair part; or Drawing 9313708 when shipped as part of M130 Dispenser System.

5.3 Marking.

5.3.1 Level A. Marking shall be as specified on Drawing 9321248 when shipped as a repair part; or Drawing 9313708 when shipped as part of M130 Dispenser System.

5.4 Unitization.

5.4.1 Level A. Only when shipped as part of the M130 Dispenser System, the dispenser assembly in the drum shall be unitized in accordance with Dwg. 19-48-4138/109-20 PA1000 (DARCOM Ammo Center).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The Dispenser assembly is part of the Aircraft General Purpose Dispenser, M130.

6.2 Ordering data. Procurement documents shall specify the following:

a. Title, number and data of this Specification.
b. Provisions for submission of first article samples.
c. Provisions of MIL-A-48078.

6.3 Submission of inspection equipment designs for approval. (See MIL-D-1078) Submit equipment designs as required to Commander, U.S Army Armament Research and Development Center, AMSMC-QAT-I(D), Dover, New Jersey 07801.

6.4 Distribution of ammunition data cards and test data. Distribution of data cards shall include the following: Commander, U.S Army Armament Research and Development Center, Attn: AMSMC-QAT-M(D), Dover, New Jersey 07801.

6.5 Drawings. Drawings listed in Section 2 of this specification under the heading US Army Armament Research and Development Center (ARDC) may also include drawings prepared by, and identified as, Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal, Picatinny Arsenal, or ARRADCOM drawings. Technical data originally prepared by these activities is now under compliance of ARDC.

6.6 Changes from previous issue. Asterisks are not used in this revision with respect to the previous issued due to the extensiveness of the changes.

Custodian:
Amy-AR

Preparing activity:
Army-AR

(Project 1095-A142)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATE

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Armament Munitions &
Chemical Command
ATTN: AMSMC-QA
Dover, NJ 07801-5001

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-D-63123B (AR)	Dispenser Assembly

3a. NAME OF SUBMITTING ORGANIZATION

b. ADDRESS *(Street, City, State, ZIP Code)*

4. TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.

INCH-POUND

MIL-D-63123B(AR)
AMENDMENT 2
04 January 1994
SUPERSEDING
AMENDMENT 1
22 October 1990

MILITARY SPECIFICATION

DISPENSER ASSEMBLY:

This amendment forms a part of Military Specification MIL-D-63123B(AR)I dated 17 December 1979 and is approved for use by the US Army Armament, Munition, and Chemical Command, and is available for use by all Department and Agencies of the Department of Defense.

2.1.1 Standards, Military: Delete "MIL-STD-810C" and substitute "MIL-STD-810".

PAGE 2

2.1.2: Add the following drawing under INSPECTION EQUIPMENT DRAWINGS:

"12589959 - BALLAST, FLARE"

PAGE 3

3.3.3 Output: Delete " 5.0 ± .75 amperes DC" and substitute "5.25 ± 1.0 amperes DC".

3.4.1 Helicopter vibration.

Line 3: Delete "MIL-STD-810C" and substitute "MIL-STD-810, Method 514.4, Category 7C".

Line 4: Delete the following: "The dispenser shall be vibrated . . . flares for this test".

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.

3.4.2 Transportation vibration, line 3: Delete "MIL-STD-810C" and substitute "MIL-STD-810, Method 514.4, Basic Transportation, Category I"

PAGE 6

3.4.3 Humidity, line 2: Delete “MIL-STD-810C . . . . Procedure I, (10 days) and substitute "MIL-STD-810, Method 507.3, Procedure III".

3.4.4 High temperature, line 2: Delete “MIL-STD-810C, Test Method 501.1" and substitute "MIL-STD-810, Test Method 501.3, Procedure II, Induced”.

3.4.5 Low temperature, line 2: Delete “MIL-STD-810C, Test Method 502.1" and substitute "MIL-STD-810, Test Method 502.3, Procedure II, Severe Cold”.

PAGE 29

4.5.2 High temperature, line 2: Delete "MIL-STD-810C, Test Method 501.1" and substitute “MIL-STD-810, Test Method 501.3, Procedure II, Induced".

4.5.3 Low temperature, line 2:. Delete “MIL-STD-810C, Test Method 502.1" and substitute “MIL-STD-810, Test Method 502.3, Procedure II, Severe Cold”.

4.5.4 Helicopter vibration,

Line 2: Delete “MIL-STD-810C . . . Procedure IIC, ..." and substitute “MIL-STD-810, Method 514.4, Category 7C, ...".

Line 4: Delete “ . . . with thirty (30) inert flares. . ." and substitute “ . . . with thirty (30) ballast flares, Dwg. 12589959, (Preferred) or with thirty (30) inert flares...".

4.5.5 Transportation vibration, line 2: Delete “MIL-STD-810C 5 and 6 HZ)” and substitute MIL-STD-810, Method 514.4, Basic Transportation, Category I".

PAGE 30

4.5.6 Humidity line 2: Delete "MIL-STD-810C . . . . (10 days)" and substitute "MIL-STD-810, Method 507.3, Procedure III”.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.

The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment,

Custodian:
Army-AR

Preparing activity:
Army -AR

(Project 1095-A271)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.