MILITARY SPECIFICATION

MICROPHONE ELEMENTS, CARBON AND EARPHONE ELEMENTS, MAGNETIC (FOR TELEPHONE AND RADIO USE)

1. Paragraph 2.1. Make the following changes:

Specifications—Military—Change "JAN-T-152" to "MIL-T-152".
Specifications—U.S. Army—Change "72-53" to "MIL-F-14072".
Standards—Military—Add MIL-STD-169 Extreme-Temperature Cycle
Standards—Military—Add MIL-STD-170 Moisture Resistance Test Cycle for Ground Signal Equipment.
Drawings—Signal Corps—Delete SC-D-16286 Standard Cycle for Moisture-Resistance Treatment of Component parts.
Drawings—Signal Corps—Delete SC-D-19999 Standard Extreme-Temperature Cycle.

2. Paragraph 3.2.5.1 *Corrosion resistant metals.* In first sentence and last sentence change specification "72-53" to "MIL-F-14072."

3. Paragraph 3.2.5.2 *Dissimilar Metals.* In last sentence change specification "72-53" to "MIL-F-14072."

4. Paragraph 4.1. Replace with the following:

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

5. Paragraph 4.6 *Talk test.* In first sentence change "in an equipment telephone circuit" to read "in accordance with the telephone circuit as shown on figure 3".

6. Paragraph 4.7.2.1 *Test procedure.* Change "ten 24 hour cycles" to read "five 48 hour cycles". Delete Drawing SC-D-16286 and add MIL-STD-170.

7. Add the following as the last items on the last page of this specification.

Custodian:
Army—EL

Preparing Activity:
Army—EL
Project No. 5965-A029

FSC 5965

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:09Z
Check the source to verify that this is the current version before use.

DIAGRAM, SCHEMATIC, ARTIFICIAL LINE
R=44 Ohms 1/2W ± 10%
C = 0.-54 MFD ± 10% 200 DCWV

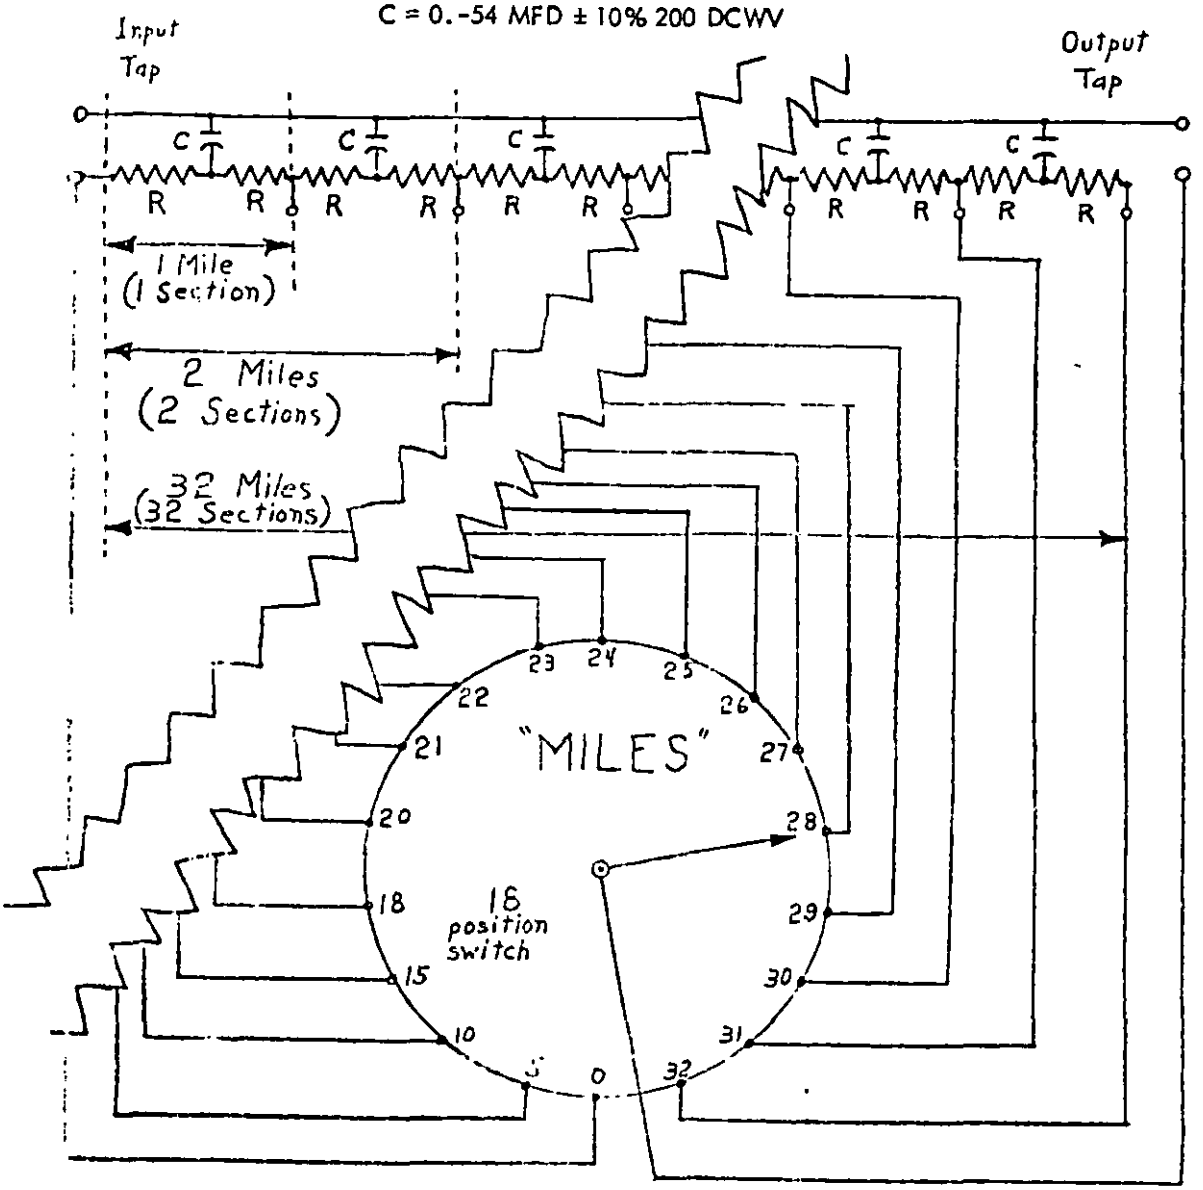


FIGURE ".

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:09Z
Check the source to verify that this is the current version before use.