MILITARY SPECIFICATION

SPREADER, SLING: PLATE-TYPE, NONADJUSTABLE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a nonadjustable, plate type, sling spreader.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) Specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-S-781	Strapping, Steel and Seals.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	Box, Wood, Nailed and Lock-Corner.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research and Development Center, ATTN: STRBE-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 3940

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:04Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-T-704	Treatment and Painting of Material.
MIL-W-8611	Welding, Metal Arc and Gas, Steels, and Corrosion and Heat Resistant Alloys; Process for.
MIL-P-15024/6	Plates, Identification, Equipment.
MIL-G-20241	Gasket Material, Wool Felt, Impregnated, Adhesive, Pressure-Sensitive.
MIL-S-81733	Sealing and Coating Compound, Corrosion Inhibitive.

STANDARDS

FEDERAL

FED-STD-595	Colors.

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.
MIL-STD-130	Identification Marking of US Military Property.
MIL-STD-889	Dissimilar Metals.

(Copies of specifications and standards required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI/AWS A2.4 - Symbols for Welding and Nondestructive Testing.
B46.1 - Surface Texture.

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:04Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

A 36 - Structural Steel.
D 3951 - Standard Practice for Commercial Packaging.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Industy association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Description. The sling spreader shall be as shown in figure 1 and as specified herein.

3.2 First article. When specified (see 6.2), a sample shall' be subjected to first article inspection (see 4.3 and 6.3).

3.3 Material. Material shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification. All material shall be new and unused.

3.3.1 Material deterioration and control. The sling spreader shall be fabricated from compatible materials, inherently corrosion and deterioration resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable storage and operating environment to which the item may be exposed.

3.3.1,1 Dissimilar metals. Dissimilar metals, as defined in MIL-STD-889, shall be electrically insulated from one another to minimize or prevent galvanic corrosion. Insulation may be provided by an insulating barrier such as a corrosion inhibiting sealant conforming to MIL-S-81733 or chromate tape conforming to MIL-G-20241. Protection against any galvanic corrosion could also be obtained by exclusion of the electrolyte if feasible.

3.3.1.2 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with components and sub-components, and shall make information available, upon request, to the contracting officer or designated representative.

3.4 Steel. Steel used in the fabrication of the sling spreader shall conform to ASTMA 36.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:04Z
Check the source to verify that this is the current version before use.

3.5 Plate surface. The sling spreader plate surface shall not deviate from a straight edge (when placed against the surface of the spreader) by more than 1/8 inch. All edges shall not deviate from a straight line by more than 1/200 of its length.

3.6 Surface and edge finish. Plate finish shall be in the natural rolled condition as received from the steel mill. Edge finish shall be as specified in figure 1 and in accordance with ANSI B46.1.

3.7 Welding. Welding shall be in accordance with MIL-W-8611. Interpretation of welding symbols in figure 1 shall be in accordance with ANSI/AWS A2.4.

3.8 Cleaning and painting. The sling spreader shall be cleaned, treated, and painted in accordance with MIL-T-704, type A. The color of the finish paint shall match color No. 34087 of FED-STD-595.

3.9 Identification marking. The sling spreader shall be identified in accordance with MIL-STD-130. The marking shall be applied to the sling spreader on a plate 6 inches long by 3-1/2 inches wide conforming to MIL-P-15024/6. In addition, "TOTAL SWL 15,000 LB" shall be legibly stamped on each plate. The plate shall be attached to the spreader in the area shown in figure 1.

3.10 Workmanship. The finished sling spreader shall be free from dents, cracks, splits, and burrs.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Components and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).

b. Quality conformance inspection (see 4.4).

c. Inspection of packaging (see 4.6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:04Z
Check the source to verify that this is the current version before use.

4.3 First article inspection.

4.3.1 Examination. The sling spreader shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.4.2 Examination. Samples selected in accordance with 4.4.1 shall be examined as specified in 4.5.1. AQL shall be 2,5 percent defective for major defects and 6.5 percent defective for minor defects.

4.5 Inspection procedure.

4.5.1 Examination. The sling spreaders shall be examined as specified herein, for the following defects:

Major

101. Dimensions and tolerances not as specified.
102. Material not as specified.
103. Materials are not resistant to corrosion and deterioration or treated to be resistant to corrosion and deterioration for the applicable storage and operating environment.
104. Dissimilar metals as defined in MIL–STD-889 are not effectively insulated from each other.
105. Contractor does not have documentation available for identification of material, material finishes or treatments.
106. Welding not as specified.
107. Straightness of plate surface or edges not as specified.
108. Holes mispositioned or improper size.
109. Painting not as specified.
110. Workmanship not as specified.

Minor

201. Identification marking not as specified or illegible.
202. Surface or edges not finished as specified.
203. Edges or plate have sharp corners or burrs.

4.6 Inspection of packaging.

4.6.1 Quality conformance inspection of pack.

4.6.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

Source: https://assist.dla.mil -- Downloaded: 202610-18T00:04Z
Check the source to verify that this is the current version before use.

4.6.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.1.3 Examination. Samples selected in accordance with 4.6.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

111.	Boxes not as specified for level A or B.
112.	Quantities packed together exceed the box limitations for level A or B.
113.	Strapping not as specified for level A.
114.	Packing not in accordance with the referenced document as specified for commercial.
115.	Marking missing, illegible, incorrect, or incomplete for level A, B, or commercial.

5. PACKAGING

5.1 Packing. Packing shall be level A, level B, or commercial as specified (see 6.2).

5.1.1 Level A. The spreaders shall be packed together in close fitting boxes conforming to PPP-B-601, overseas type, style optional or PPP-B-621, class 2, style optional, in quantities not to exceed the weight limitation of the box. The spreaders shall be blocked and braced within the box in a manner to prevent movement. Box closure and strapping shall be in accordance with the appendix to the applicable box specification. Strapping shall conform to QQ-S-781, class 1, type I or IV, size as applicable. Unless otherwise specified (see 6.2) strapping shall be finish B. When specified (see 6.2) strapping shall be finish A.

5.1.2 Level B. The spreaders shall be packed as specified in 5.1.1 for level A except the boxes shall be domestic type or class as applicable. Box closure and strapping shall be in accordance with the appendix to the applicable box specification.

5.1.3 Commercial. The spreaders shall be packed in accordance with ASTM D 3951.

5.2 Marking.

5.2.1 Military. Marking for military levels of protection (level A or B) shall be in accordance with MIL-STD-129.

5.2.2 Commercial. Marking for commercial packaging shall be in accordance with ASTM D 3951.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:04Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The sling spreader is intended for use as a component of a multiple barrel sling used for loading and unloading drums and barrels in quantities up to 10 in a single lift (see MIL-S-58040).

6.2 Ordering data. Acquisition documents should specify the following: "

a. Title, number, and date of this specification.

b. When a first article is required for inspection and approval and the number of units required (see 3.2).

c. Degree of packing required (see 5.1).

d. When other than finish B strapping is required (see 5.1.1).

6.3 First article. When a first article inspection is required, the item shall be tested and should be a preproduction sling spreader. The first article should consist of one or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, test, and approval of the first article.


Custodians:
Army - ME
Air Force - 99

Review activity:
Air Force - 84
DLA - IS

Preparing activity:
Army - ME

Project 3940-0171

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:04Z
Check the source to verify that this is the current version before use.

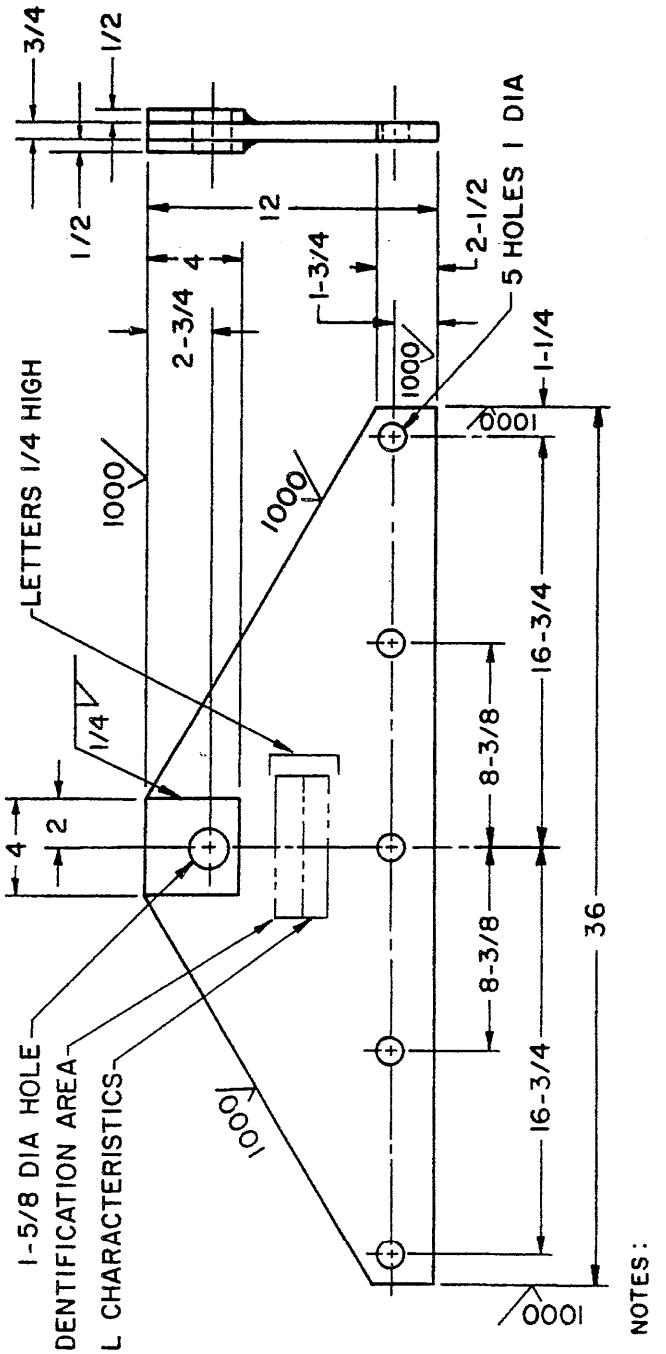

NOTES:

1. UNLESS OTHERWISE NOTED, ALL DIMENSIONS ARE IN INCHES.
2. TOLERANCES:
   - ± 1/16 IN. ON ALL DIMENSIONS EXCEPT AS OTHERWISE INDICATED
   - ± 1/32 IN. ON HOLE DIAMETERS AND LOCATING DIMENSIONS
   - 0.01 UNDER SPECIFIED PLATE THICKNESS (MILL TOLERANCE)
   - ± 2° ON RIGHT ANGLES.
3. BREAK ALL SHARP CORNERS
4. HOLES MAY BE EITHER FLAME CUT AND DRILLED TO SIZE, PUNCHED AND DRILLED TO SIZE, OR DRILLED.

X-804A

FIGURE 1. Nonadjustable, plate type, sling spreader.

Source: https://assist.dla.mil -- Downloaded: 202610-18T00:04Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY
USA Belvoir R&D Center
STRBE-DS
Fort Belvoir, VA 22060-5166



NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12002 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
USA Belvoir R&D Center
STRBE-DS
Fort Belvoir, VA 22060-5166

Source: https://assist.dla.mil -- Downloaded: 202610-18T00:04Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-13119E	Spreader, Sling: Plate-Type, Nonadjustable

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426 82 MAR

PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-18T00:04Z
Check the source to verify that this is the current version before use.