FED. SUP CLASS
2805

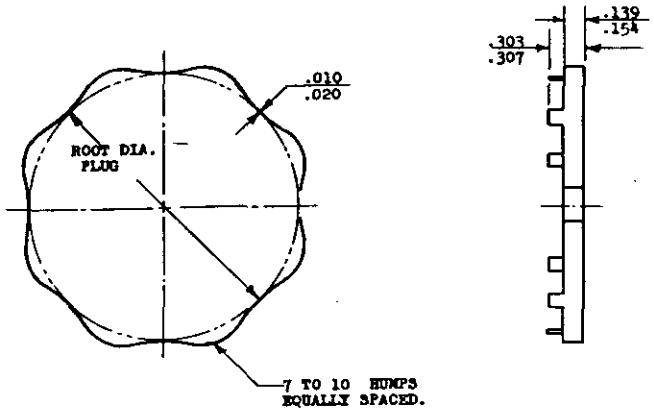

CANCELED AFTER 15 APRIL 1982
NO SUPERSEDING STANDARD.

	3.334
	3.567

NOTES:

1. UNIT PRES. ...0 P.S.I. ON TOP RING OF ASSEMBLY.

   P.S.I. = $\frac{T}{B_i}$

   T = TANGENTIAL TENSION OF RING & SPRING ASSEMBLED OVER ROOT DIAMETER PLUG.

   B = FACE WIDTH.

   D = DIAMETER OF RING.

2. MATERIAL = S.A.E. 1095
   (69 - 75 ROCKWELL 30N)

3. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

4. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

6. TOLERANCES: UNLESS OTHERWISE SPECIFIED, LINEAR MACHINED DIMENSIONS ±.010: ANGULAR MACHINED DIMENSIONS ±30'. DO NOT SCALE DRAWING.

(C) ENTIRE STANDARD REVISED

REVIEW ACTIVITY : DESC, 69
USER ACTIVITY : YD, ATAC

This Military Standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 19 JUNE 1952 REVISED (A) 27 NOVEMBER 1958 (B) 24 OCTOBER 1955 (C) 7 MAR 1966 (D) 15 APRIL 1982

P.A. ARMY MO(ERDL) Other Cust A.F. - 69 NAVY - YD	TITLE RING, EXPANDER, PISTON: ENGINE, OIL, DOUBLE RING TYPE	MILITARY STANDARD MS 13928
PROCUREMENT SPECIFICATION MIL-E-11275	SUPERSEDES:	SHEET 1 OF 1

DD FORM SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:30Z
Check the source to verify that this is the current version before use.