FED. SUP CLASS
9540

USER ACTIVITIES:
NAVY-MC, OS, SH

REVIEWER ACTIVITIES:
AIR FORCE-84
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

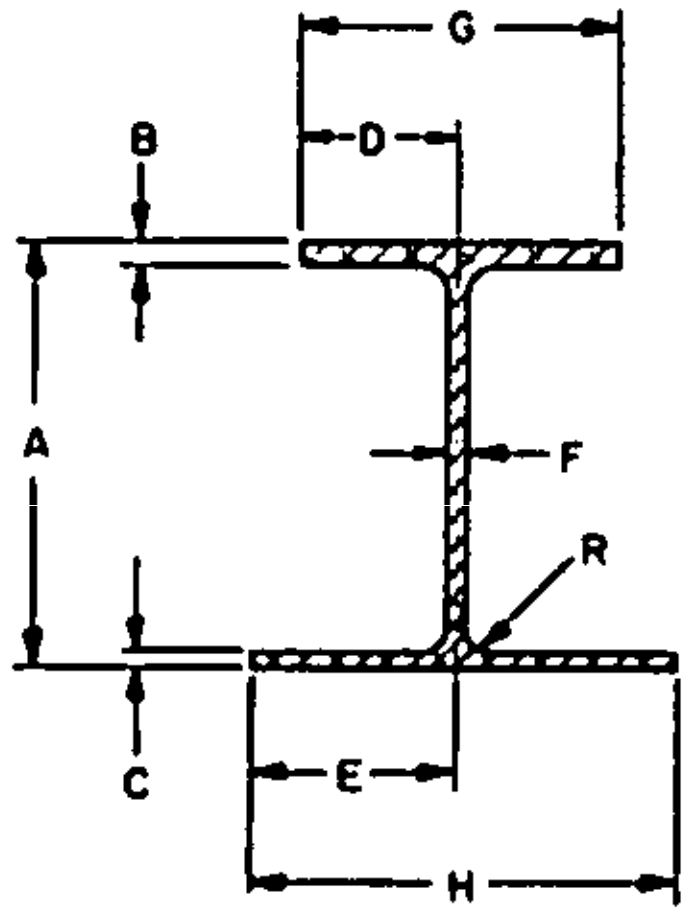

TABLE I. DASH NUMBERS.

| DASH NO | A | B | C | D | E | F | R | G | H | [illegible] |
|---|---|---|---|---|---|---|---|---|---|---|
| 001<br>003 | 1.250<br>2.000 | .060<br>.125 | .095<br>.070 | .290<br>.745 | 1.600<br>.995 | .100<br>.125 | .060<br>.070 | .560<br>1.500 | [illegible]<br>2.000 | O<br>[illegible] |

REQUIREMENTS:

1. MATERIAL. ALUMINUM ALLOY 7075, (UNS A97075) AS SPECIFIED IN QQ-A-200/11.
2. FORMING PROCESS. EXTRUDED (CODE E).
3. PART NUMBER. THE PART NUMBER CONSISTS OF THE BASIC MS NUMBER, PLUS A FORMING PROCESS CODE, PLUS A DASH NUMBER FROM TABLE I.

EXAMPLE: MS14385E001

DASH NUMBER FROM TABLE I
EXTRUDED (SEE REQUIREMENT 2)
BASIC MS NUMBER

4. MARKING. ALUMINUM AND ALUMINUM ALLOYS SHALL BE MARKED WITH THE PRODUCER'S NAME OR REGISTERED TRADE MARK, THE PART NUMBER (MILITARY STANDARD (MS) NUMBER PLUS THE APPLICABLE DASH NUMBER), AND THE LOT NUMBER AND THIS MARKING SHALL BE APPLIED IN ACCORDANCE WITH FED-STD-184.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. STANDARD LENGTH OF I-BEAM IS 10' MINIMUM, 12' MAXIMUM.
3. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THE REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
4. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

APPROVED 30 April 1984 REVISED

P. A. AS
Other Cust MR 99
INTERNATIONAL INTEREST

TITLE
I BEAM
ALUMINUM ALLOY 7075

MILITARY STANDARD
MS14385
PAGE 1 OF 1

PROCUREMENT SPECIFICATION
QQ-A-200

SUPERSEDES:

DD FORM 1 MAY 71 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

9540-0116

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:41Z
Check the source to verify that this is the current version before use.