FED. SUP CLASS 5990

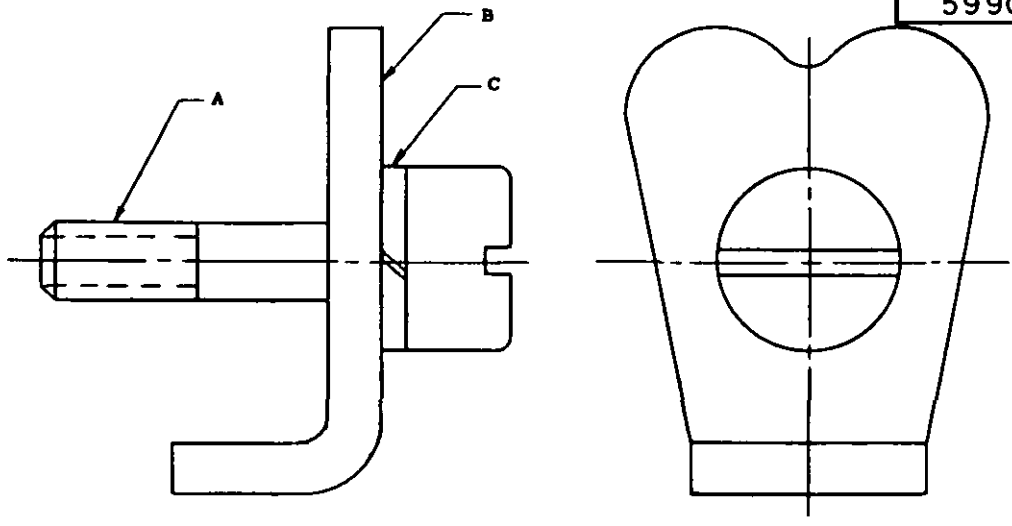

TABLE I

DASH NO.	SYNCHRO SIZE	A	B	C	APPROX. TEST WEIGHT OZ 3-CLAMP	MAX SHOCK FT. LB SEE NOTE 1
-1	05	MS17184-1	MS17185-1	MS35338-135	2.0	400
	08					
-2	11		MS17185-2		4.0	
	15				8.0	200
	18				14.0	100
-3	—	MS17184-2	MS17185-3	MS35338-136	—	—
-4	23		MS17185-4		32.0	500
	31				64.0	—
	37				116.0	—
-5	—		MS17185-5		—	—

NOTE: -

1. SHOCK TEST: THE REQUIRED NUMBER OF CLAMP ASSEMBLIES HOLDING THE SPECIFIED TEST WEIGHT, SHALL WITHSTAND THE MAXIMUM SHOCK TEST AS INDICATED IN TABLE I WITHOUT LOOSENING OR OTHER FAILURE. THE SHOCK TEST SHALL BE THE PROCEDURE DESCRIBED IN MIL-S-20708.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 20 SEPT. 1960 REVISED (A) 17 March 1967

(A) REVISED AND REDRAWN

P.A. NAVY – AS Other Coast	TITLE CLAMP ASSEMBLY (SYNCHRO)	MILITARY STANDARD MS17183(AS)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: BUORD DWGS 219473, 643019, 1777630, 1869583 AND 1870334	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This standard has been approved by the NAVAL AIR SYSTEMS COMMAND, Department of the NAVY and is mandatory for use by the activity. All other military activities are required to employ this standard when suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:04Z
Check the source to verify that this is the current version before use.