FED. SUP CLASS
5940

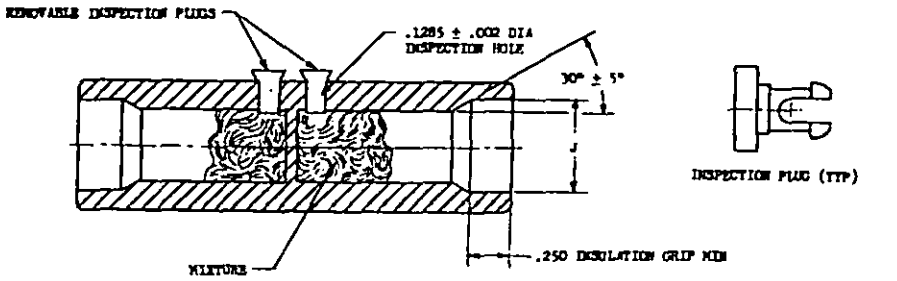

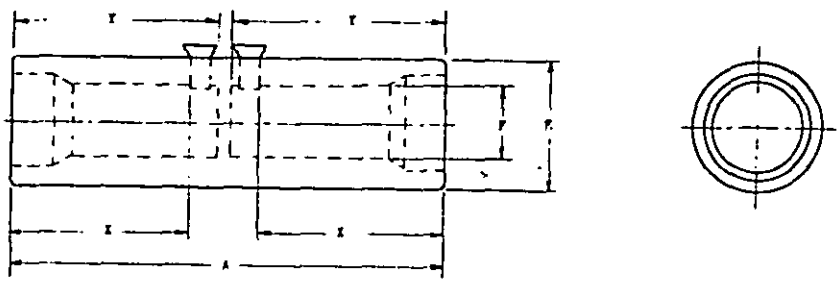

DASH NO.	CABLE SIZE	A ±.015	E ±.020	F ±.003	J DIA ±.010	K ±.030	Y ±.030
-1	8	2.133	.355	.167	.250	.960	1.125
-2	6	2.143	.413	.219	.312	.979	1.164
-3	4	2.839	.512	.272	.375	1.175	1.364
-4	2	3.125	.601	.342	.469	1.320	1.505
-5	1	3.125	.633	.378	.516	1.320	1.505
-6	0	3.213	.692	.425	.563	1.390	1.564
-7	00	3.312	.739	.485	.625	1.414	1.598
-8	000	3.437	.836	.547	.703	1.479	1.663
-9	0000	3.719	.967	.594	.766	1.617	1.802

NOTES:
(A) MATERIAL: WROUGHT ALUMINUM, MINIMUM CONDUCTIVITY 57% IACS. MAXIMUM HARDNESS ROCKWELL H35
FINISH: TIN PLATE - ELECTRODEPOSITED .0003 INCH MINIMUM.
SPLICE SHALL BE OF ONE PIECE CONSTRUCTION.
DIMENSIONS IN INCHES.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P.A. Navy-WEPS Other Cases .SAF- 11 ARMY- EL (A)	TITLE: SPLICE-PERMANENT CRIMP STYLE, 2 WAY TYPE FOR ALUMINUM AIRCRAFT WIRE, CLASS 1	MILITARY STANDARD MS25439
PROCUREMENT SPECIFICATION MIL-T-7099	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

REVISED (A) 15 May 64
APPROVED 25 Jan 60

USER SYMBOLS: None
REVIEWER SYMBOLS: USAF - 11, 85 Navy - Weps Army - EL

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft stipulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for requisition use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:09Z
Check the source to verify that this is the current version before use.