FED. SUP CLASS 4730

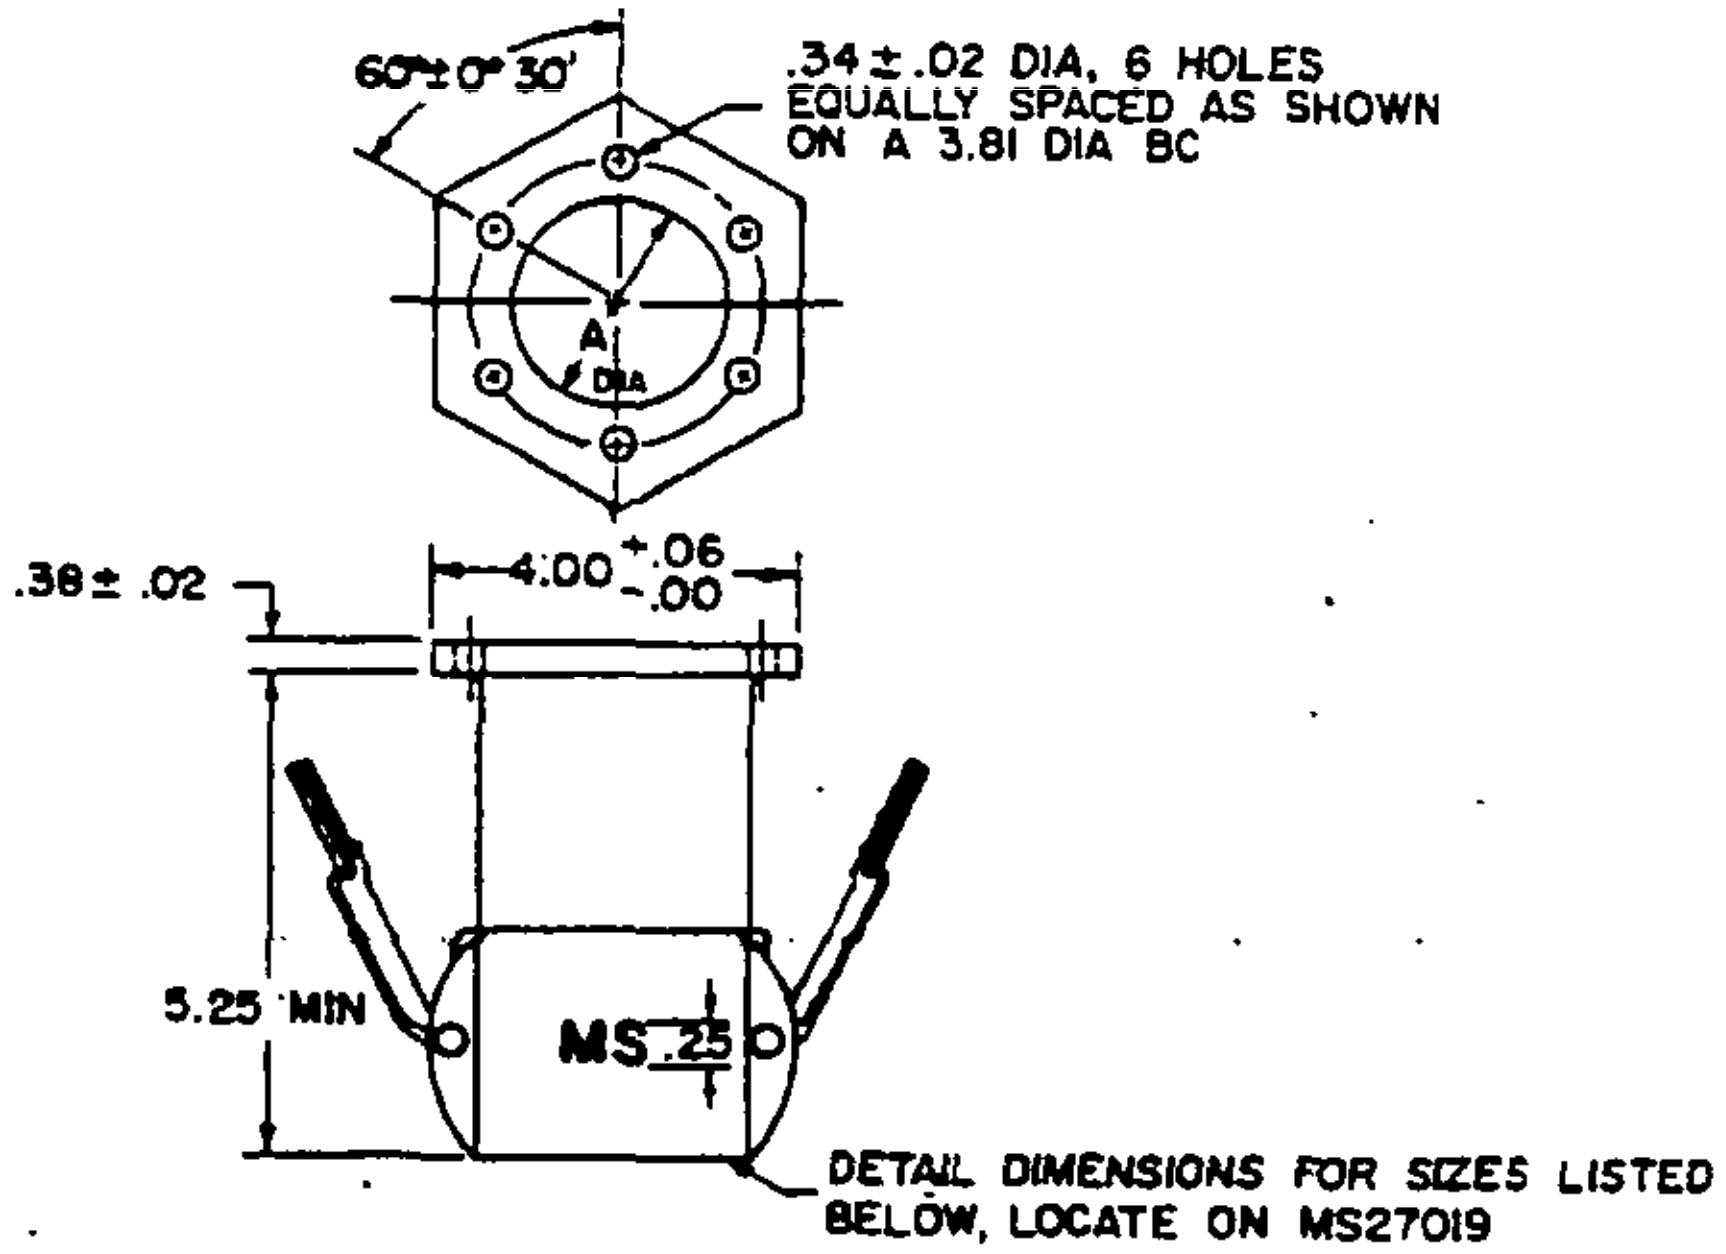

60°±0°30'
.34±.02 DIA, 6 HOLES EQUALLY SPACED AS SHOWN ON A 3.81 DIA BC
A DIA
.38±.02
4.00 +.06 -.00
5.25 MIN
MS
.25
DETAIL DIMENSIONS FOR SIZES LISTED BELOW, LOCATE ON MS27019

Ⓓ

DASH NUMBER	CLASS NUMBER		NOM SIZE	DIMENSION A	GASKET REQ'D
	CLASS 1	CLASS 2			
-9	X		1-1/2	1.50	MS27030-5
-10		X			
-11	X		2	2.00	MS27030-6
-12		X			
-13	X		2-1/2	2.50	MS27030-7
-14		X			
-15	X		3	2.50	MS27030-8
-16		X			
-17	X		4	2.50	MS27030-9
-18		X			
-19	X		6	2.50	MS27030-10
-20		X			

Ⓓ DENOTES CHANGES

User activities:
Army - AV
Navy - SH, MC

Review activities:
Army - GL
Air Force - 82
DLA - CS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

APPROVED 21 AUGUST 1964 REVISED Ⓐ 2 APRIL 1970 Ⓑ 19 AUGUST 1975 Ⓒ 16 JULY 1980 Ⓓ 15 MAY 1989

P.A. ARMY-ME
Other Cust
A.F.-99

INTERNATIONAL INTEREST
STANAG NO. 2751
QSTAG 240

TITLE
COUPLING HALF, QUICK DISCONNECT, CAM LOCKING TYPE, FEMALE, FLANGED, TYPE VIII, (FOR D-1 NOZZLE-AIRCRAFT)

MILITARY STANDARD
MS 70091

PROCUREMENT SPECIFICATIONS
MIL-C-27487

SUPERSEDES:

SHEET 1 OF 2

DD FORM 1 SEP 57 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:25Z
Check the source to verify that this is the current version before use.

4730-0691

AMSC N/A

FED. SUP CLASS
4730

NOTES:

1. MATERIAL
   a. BODY
      CLASS 1 ALUMINUM - QQ-A-601, ALLOY 356, TEMPER T6 OR ALLOY 40E, TEMPER T5.
      CLASS 2 BRASS - QQ-C-390, ALLOY 836,844 OR 922; OR BRASS, QQ-B-626, COPPER ALLOY 377.
   b. ARMS, CAM - QQ-C-390, BRONZE, ALLOY 865 OR 862; OR BRASS, QQ-B-626, COPPER ALLOY 377.
   c. PINS, CAM - QQ-S-763, CRES, CLASS 304 OR 316, CONDITION A, FORM ROUND OR ASTM A582 TYPE 303SE, CONDITION A, FORM ROUND.
   d. RINGS, WIRE - SPRING STEEL, OR STAINLESS STEEL, ASTM A313, TYPE 304.
2. FINISH
   a. BODY
      CLASS 1 ALUMINUM - MIL-A-8625, ANODIC COATING, TYPE II, CLASS 1, THICKNESS NOT LESS THAN 0.0004 IN.
      CLASS 2 BRONZE OR BRASS - BODY AND CAM ARMS, PLAIN.
   b. RINGS - QQ-P-416, CADMIUM PLATE, TYPE II, CLASS 1, FOR CARBON STEEL WIRE ONLY.
   c. PINS, CAM - CRES OR STAINLESS STEEL SHALL BE PASSIVATED PER ASTM A380.
3. BURRS AND ALL FOREIGN MATERIAL SHALL BE REMOVED.

Ⓓ 4. HYDROSTATIC TEST PRESSURE - 1 1/2 THROUGH 4 INCH, 300 P.S.I.; 6 INCH, 150 P.S.I.

Ⓓ 5. WORKING PRESSURE - 1 1/2 THROUGH 4 INCH, 150 P.S.I.; 6 INCH, 75 P.S.I.

Ⓓ 6. DIMENSIONS - IN INCHES. NOMINAL UNLESS OTHERWISE SPECIFIED. TOLERANCES ±.02.

7. PART NUMBER - THE MS PART NUMBER CONSISTS OF THE MS SHEET NUMBER PLUS THE DASH NUMBER.
   EXAMPLE: MS70091-9.

Ⓓ 8. REFERENCED GOVERNMENT DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATION AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

9. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER ACQUISITION DOCUMENTS REFERENCED HEREIN.

Ⓓ 10. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

Ⓓ 11. ORDERING DATA SHALL INCLUDE:
   a. STAINLESS STEEL PULL RING, IF REQUIRED, OR
   b. CADMIUM PLATED STEEL PULL RING.

NOTE: CERTAIN PROVISIONS (DIMENSIONS) OF THIS DOCUMENT ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT (STANAG NO. 2761 AND QSTAG 240). WHEN CHANGE NOTICE, REVISION, OR CANCELLATION OF THIS DOCUMENT IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY SHALL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

APPROVED 11 MARCH 55   REVISED Ⓓ FOR CHANGES SEE SHEETS 1 AND 2

P.A. ACTY-ME Other Cust AF - 99	INTERNATIONAL INTEREST STANAG NO. 2761 QSTAG 240	TITLE COUPLING HALF, QUICK DISCONNECT, CAM LOCKING TYPE, FEMALE, FLANGED, TYPE VIII, (FOR D-1 NOZZLE-AIRCRAFT)	MILITARY STANDARD MS70091
Procurement Specifications MIL-C-27487		SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:25Z
Check the source to verify that this is the current version before use.