


FED SUP CLASS
4730





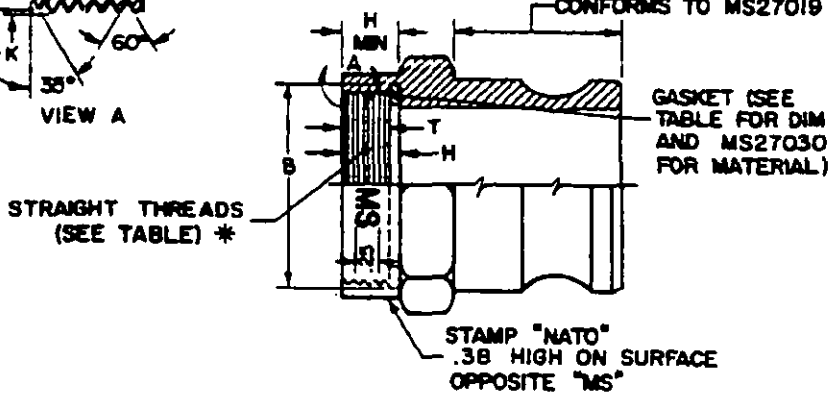

DASH NO.	NOM SIZE	TPI	THD TYPE	MAJ DIA D MIN	PITCH DIA E		MINOR DIA K		DEPTH R	THD LG-T	GROOVE DIA B	WIDTH ACROSS FLATS F	GSET		DIM THK
					MAX	MIN	MAX	MIN					OD	ID	
-1	3/4	14	NPSM	1.0428	1.0034	.9964	.9644	.9500	.53	.38	1.06	1.38	1.03	.69	.12
-2	1	11-1/2	NPSM	1.3051	1.2571	1.2486	1.2091	1.1921	.53	.38	1.34	1.62	1.28	.94	.12
-3	1-1/2	11-1/2	NPSM	1.8868	1.8408	1.8323	1.7928	1.7758	.59	.47	2.06	2.25	2.00	1.44	.12
-4	2	11-1/2	NPSM	2.3628	2.3168	2.3063	2.2668	2.2498	.72	.59	2.44	2.75	2.38	1.88	.12
-5	2-1/2	8	NH	2.8554	2.7853	2.7742	2.7152	2.6930	.94	.69	2.94	3.38	3.00	2.44	.12
-6	3	8	NH	3.4817	3.4116	3.4005	3.3415	3.3193	1.06	.81	3.56	3.88	3.50	2.94	.12
-7	4	8	NH	4.4803	4.4102	4.3991	4.3401	4.3179	1.06	.81	4.56	4.88	4.50	3.81	.12
-8	6	8	NH	6.5435	6.5295	6.5180	6.4531	6.4370	1.31	1.19	6.56	7.72	6.50	5.88	.12

(D) DENOTES CHANGES

APPROVED 10 AUGUST 1960 REVISED (A) 12 FEBRUARY 1970 (B) 19 AUGUST 1975 (C) 16 JULY 1980 (D) 15 MAY 1989

User activities :
Army - AV
Navy - MC, SH

Review activities :
Army - GL
Air Force - 82
DLA - CS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A.
ARMY-ME,
Other Cust
NAVY - YD
AF - 99

INTERNATIONAL INTEREST STANAG NO. 2761 USTAL 240

TITLE
COUPLING HALF, QUICK DISCONNECT, CAM-LOCKING TYPE, MALE, INTERNAL STRAIGHT THREADS, TYPE XVIII (FOR USE WITH NATO EQUIPMENT)

MILITARY STANDARD
MS 70095

PROCUREMENT SPECIFICATIONS
MIL-C-27487

SUPERSEDES:

SHEET 1 OF 2

DD FORM 672 SEP 87

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:25Z
Check the source to verify that this is the current version before use.

4730-0692

AF 427503

FED. SUP CLASS 4730

NOTES:

1. MATERIAL
   a. BODY - QQ-C-390, BRASS ALLOY 836, 844 OR 922; OR BRASS, QQ-B-626, COPPER ALLOY 377.
2. FINISH
   a. BODY - MIL-F-495, BLACK CHEMICAL FINISH.
3. BURRS AND ALL FOREIGN MATERIAL SHALL BE REMOVED.
4. HYDROSTATIC TEST PRESSURE - 3/4 THROUGH 4 INCH, 300 P.S.I.; 6 INCH, 150 P.S.I.
5. WORKING PRESSURE - 3/4 THROUGH 4 INCH, 150 P.S.I.; 6 INCH, 75 P.S.I.
6. (D) DIMENSIONS - IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES ±.02; ±1/2°.
7. THREADS - THREADS SHALL BE AMERICAN NATIONAL HOSE COUPLING (NPSH) OR AMERICAN NATIONAL FIRE HOSE COUPLING (NH) as SPECIFIED IN TABLE AND CONFORMING TO FED-STD-H28/10.
8. PART NUMBER - THE MS PART NUMBER CONSISTS OF THE MS SHEET NUMBER PLUS THE DASH NUMBER. EXAMPLE: MS70095-1.
9. (D) REFERENCED GOVERNMENT DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
10. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER ACQUISITION DOCUMENTS REFERENCED HEREIN.
11. (D) IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

NOTE: CERTAIN PROVISIONS (IDENTIFIED BY ASTERISK) OF THIS DOCUMENT ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT (STANAG NO. 2761 AND OSTAG 240). WHEN CHANGE NOTICE, REVISION, OR CANCELLATION OF THIS DOCUMENT IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY SHALL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

APPROVED 10 AUGUST 1960 REVISED (D) FOR CHANGES SEE SHEETS 1 AND 2

(D) DENOTES CHANGES

P.A. ARRT-ME Other Cust NAVY - YD AF - 99	INTERNATIONAL INTEREST STANAG NO. 2761 OSTAG 240	TITLE COUPLING HALF, QUICK DISCONNECT, CAM-LOCKING TYPE, MALE, INTERNAL STRAIGHT THREADS, TYPE XXVII (FOR USE WITH NATO EQUIPMENT)	MILITARY STANDARD MS 70095
Procurement Specifications MIL-C-27487		SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 COORDINATED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil - Downloaded: 2026-10-23T20:25Z
Check the source to verify that this is the current version before use.