FED. SUP CLASS
1670

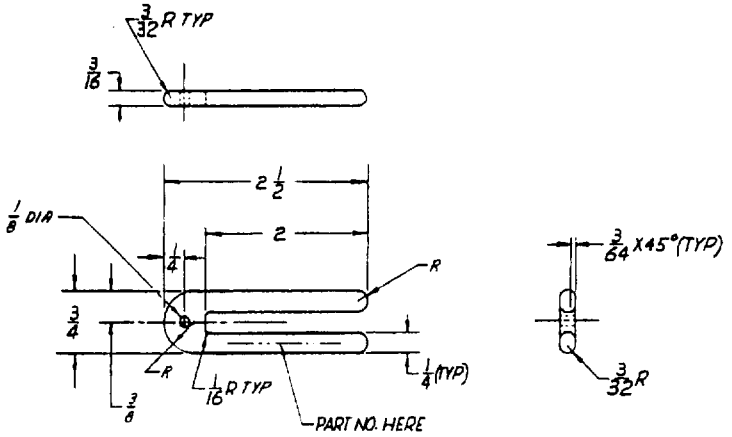

REQUIREMENTS:

MATERIAL: ALUMINUM ALLOY, TEMPER T4, QQ-A-225/6.

SURFACE ROUGHNESS: 63/ MAX., INTERPRET IN ACCORDANCE WITH AMERICAN NATIONAL STANDARDS INSTITUTE, INC., ANSI B46.1.

FINISH: ANODIZE, TYPE II, CLASS 1, MIL-A-8625.

BREAK SHARP EDGES AND REMOVE ALL BURRS.

DIMENSIONS IN INCHES. FRACTIONAL TOLERANCE ± 1/64, ANGLES ± 2°.

NOTES:

1. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.

APPROVED 27 AUG 1970 REVISED

P.A. GL Other Cust NAVY AS USAF 11	TITLE FORK, LOCKING, PARACHUTE SLIP RISER	MILITARY STANDARD MS 70122
PROCUREMENT SPECIFICATION MIL-H-7195	SUPERSEDES USAF 57B6221	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

REVIEW: ARMY - AV, NAVY - AS, USAF - 11, 82
USER: MC

This Military Standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:26Z
Check the source to verify that this is the current version before use.