FED. SUP CLASS
5940

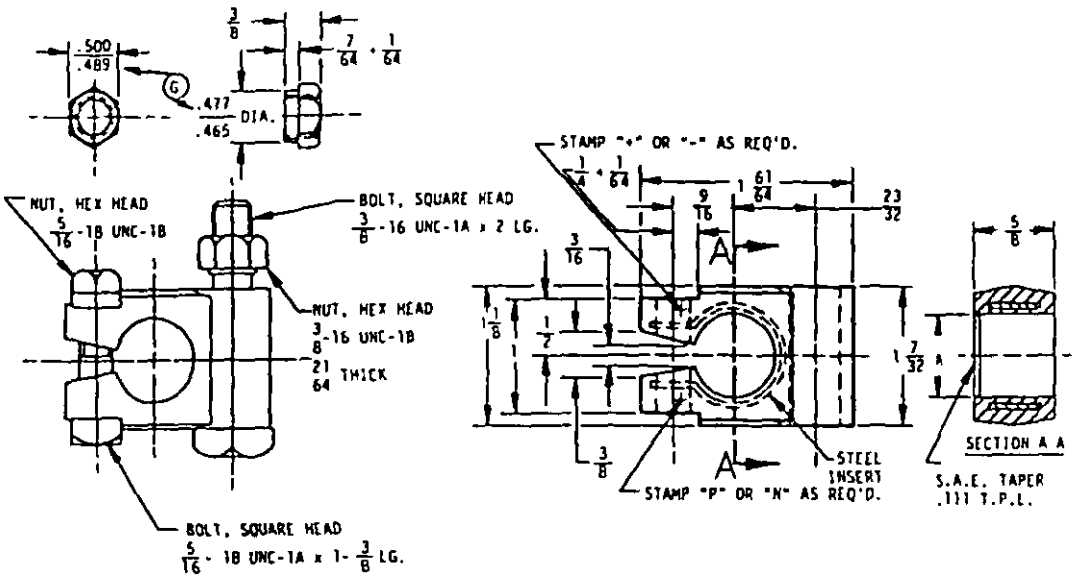

MS PART NUMBER	A. DIA.		TERMINAL DESIGNATION
	MAX.	MIN.	
MS75004-1	.695	.690	POSITIVE
MS75004-2	.633	.628	NEGATIVE

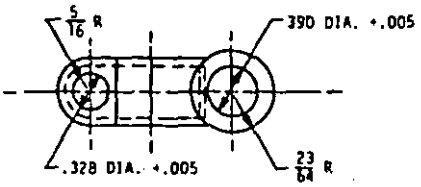

(F) REQUIREMENTS:

1. MATERIAL:
   A. DIE CASTING: ANTIMONY AND LEAD ALLOY CONTAINING 6 TO 7 1/2 PERCENT ANTIMONY.
   B. INSERT: STEEL, CARBON, SHEET OR STRIP, .048 MIN. THICKNESS, HR P & O OR CR, COMMERCIAL QUALITY, TEMPER 2 TO 5, QQ-S-698.
   C. BOLTS AND NUTS: STEEL, 55,000 P.S.I. MINIMUM TENSILE STRENGTH.
2. FINISH: BOLTS AND NUTS: LEAD PLATED, TYPE II, CLASS 2, MIL-L-13808.
3. THREADS SHALL BE IN ACCORDANCE WITH SCREW THREAD STANDARDS FOR FEDERAL SERVICES HANDBOOK H-28.
4. MARKING SHALL CONSIST OF THE MS PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

NOTES:

1. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± 1/64.
2. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEEDENCE OVER DOCUMENTS REFERENCED HEREIN.
3. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF INVITATION FOR BID.
4. RECYCLED MATERIALS. THE USE OF RECYCLED MATERIALS WHICH MEET THE REQUIREMENTS OF THE APPLICABLE METERIAL SPECIFICATIONS WITHOUT JEPARDIZING THE INTENDED USE OF THE ITEM SHALL BE ENCOURAGED.

(G) DENOTES CHANGE

P.A. ARMY-AT Other Cust NAVY-MC AF-85	INTERNATIONAL INTEREST	TITLE ADAPTER, BATTERY TERMINAL (STORAGE BATTERY)	MILITARY STANDARD MS75004
PROCUREMENT SPECIFICATION MIL-A-55059	SUPERSEDES: MS91164		SHEET 1 OF 1

DD FORM 672-1 (COORDINATED) 5940-8041

USER ACTIVITIES: ARMY-ME, ER

REVIEWER ACTIVITIES: ARMY-MI

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense. AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

REVISED (F) 15 JUNE 1978 (G) 27 MAY 1987

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:26Z
Check the source to verify that this is the current version before use.