MILITARY SPECIFICATION

CANDLER, EGG, (ALUMINUM, 110 VOLT, AC-DC)

This specification was approved by the Departments of the Army, the Navy, and the Air Force for use of procurement services of the respective Departments.

1. SCOPE

1.1 This specification covers an egg, candler, aluminum, 110 volts, AC-DC, which is intended to be used in detecting defects in shell eggs.

2. APPLICABLE SPECIFICATIONS, OTHER PUBLICATIONS, AND DRAWINGS

2.1 Specifications.—The following specifications, of the issue in effect on date of invitation for bids, form a part of this specification:

FEDERAL SPECIFICATIONS

NN-B-601 —Boxes, Wood - Cleated - Plywood, for Domestic Shipment.

NN-B-621 —Boxes, Wood, Nailed and Lock-Corner.

NN-B-631 —Boxes; Wood, Wirebound (for Domestic Shipment).

QQ-A-359 —Aluminum-Alloy (AL-3) (Aluminum-Manganese); Plate and Sheet.

LLL-B-631 —Boxes; Fiber, Corrugated (for Domestic Shipment).

LLL-B-636 —Boxes; Fiber, Solid (for Domestic Shipment).

MILITARY SPECIFICATIONS

JAN-P-105 —Packaging and Packing for Overseas Shipment—Boxes, Wood, Cleated, Plywood.

JAN-P-106 —Packaging and Packing for Overseas Shipment—Boxes; Wood, Nailed.

JAN-B-107 —Boxes, Wood, Wirebound (Overseas Type).

JAN-P-125 —Packaging and Packing for Overseas Shipment—Barrier-Materials, Waterproof, Flexible.

JAN-P-140 —Packaging and Packing for Overseas Shipment — Adhesives, Water-Resistant, Case-Liner.

MIL-M-3157—Marking of Domestic Shipments by Contractors for Supplies and Equipment Consigned to the Medical Departments of the Armed Services.

(*Army.*—Copies of specifications should be obtained from the procuring agency or as directed by that agency. Both the title and identifying number or symbol should be stipulated when requesting copies.)

2.2 Other publications. — The following publication, of the issue in effect on date of invitation for bids, forms a part of this specification:

MILITARY STANDARD

MIL-STD-105 — Sampling Procedures and Tables for Inspection by Attributes.

(Copies of Military standards may be obtained from the source given for obtaining specifications.)

2.3 Drawings.—The following drawing, of the issue in effect on date of invitation for bids, forms a part of this specification:

ARMED SERVICES MEDICAL PROCUREMENT AGENCY DRAWING

1782 — Candler, Egg, Aluminum, 110 Volt, AC-DC (Reduced copy attached as fig. 1.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:12Z
Check the source to verify that this is the current version before use.

(Copies of ASMPA drawing may be obtained upon application to the Armed Services Medical Procurement Agency, 84 Sands Street, Brooklyn 1, New York.)

3. REQUIREMENTS

3.1 Material.

3.1.1 *Aluminum.* — The aluminum shall comply with Specification QQ–A–359 for type I, flat sheet, No. 1 commercial bright finish.

3.2 Design. — The egg candler shall be a portable type, lightweight, easily assembled unit, capable of producing approximately 400 foot candles with bright, well-concentrated light, on the blue side of the spectrum. For details and dimensions see Drawing 1782.

3.3 Construction.—The external portion of the candles shall be made of flat sheet aluminum, 0.040 inch nominal thickness, No. 1 commercial bright finish. The two sides and back shall be made of one piece, and a ¼-inch flange shall be formed to the inside on the front and bottom edges. A ventilating louvre, 2½ inches long and projecting ¼ inch to the outside shall be made near the bottom of each side. A hole shall be drilled and tapped in the ¼-inch flange about midway between the top and bottom of each side of the front. The top section shall be placed inside the sides and back, and held in place by means of spot welds along the ½-inch flange. A ventilating louvre, 2½ inches long and projecting ¼ inch to the outside shall be made near the back of the top. A hole 1 7/16 inches in diameter shall be cut out approximately in the center of the top, through which a porcelain socket shall be placed. Two holes shall be drilled in the lower half of the center of the back to accommodate the reflector adjusting screws. The front shall be stamped from one piece of sheet aluminum in such a manner that a projection from the front of the candler is formed. A hole shall be drilled on each side of the front section for fastening magnifying plate and front section to the two sides, with ⅛ inch diameter set screws. A 1-inch diameter hole shall be drilled in the center of the front section, into which shall be fitted a Masonite bumper plate held in place by two, ⅛ inch diameter flat headed machine screws. The electric light socket, incandescent light bulb, reflector, glass lens, details of bottom and the candling opening, and other construction details, shall be as shown on drawing. The candler shall be equipped with a rubber covered light cord approximately 9½ feet long with a male plug covered by a rubber cap, attached to the distal end and to a porcelain covered light bulb socket on the proximal end.

3.4 Identification marking.—Candlers shall be marked with the name of the manufacturer or registered trade-mark.

3.5 Finish. — The outside of the candler shall be given a black krinkle effect finish.

3.6 Workmanship. — Workmanship shall be first class throughout. The candlers shall be free from defects which detract from their appearance or may impair their serviceability.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Sampling.—Samples will be submitted in accordance with instructions furnished by the procuring activity. In addition, inspection at contractor's facility by inspector will be conducted in accordance with the procedures set forth in Standard MIL–STD–105.

4.2 Inspection.—Inspection may be made throughout the entire process of manufacture. The passing as satisfactory of any detail of construction or materials will not relieve the contractor of responsibility for faulty workmanship or materials which may be discovered at any time prior to final acceptance. Final inspection of the finished article shall be made either at point of production or at point of delivery designated

Source: https://assist.dla.mil -- Downloaded: 20260-16T18:12Z
Check the source to verify that this is the current version before use.

in the contract or purchase order of procuring agency. In case of factory inspection, every facility shall be afforded inspectors, by the manufacturer, for the prosecution of their work.

4.3 Tests.—Tests shall be conducted in accordance with the applicable specifications, as necessary, to determine compliance with this specification.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 *Unit packaging.* — One candler, as specified, constitutes one unit. Each unit shall be packaged in a solid fiberboard or double-faced corrugated carton, of appropriate size and design, in accordance with Specification LLL–B–631 or LLL–B–636. Each carton shall be adequately secured to prevent accidental opening.

5.2 Packing.

5.2.1 *For domestic shipment.* — Twenty-four unit cartons (24 units) shall be overpacked in an exterior container constructed in accordance with Specification NN–B–601, NN–B–621, or NN–B–631.

5.2.2 *For overseas shipment.* — Twenty-four unit cartons (24 units) shall be overpacked in an exterior container designed for type 3 load, and constructed in accordance with Specification JAN–P–105, JAN–P–106, or JAN–B–107. Closure and strapping shall comply with appendix of applicable specification. Each box shall be lined with a waterproof barrier (bag) conforming to Specification JAN–P–125. Closures shall be completely sealed by a continuous seam of water-resistant adhesive at least ¾ inch wide and conforming to Specification JAN–P–140.

5.2.3 *Packing variation permitted.*—If the number of units in any shipment is not the exact multiple of the number of units specified to be contained in each shipping container, the units not constituting the nearest such multiple shall be packed in an exterior container of suitable size and design, and so constructed as to insure safe delivery to specified destination.

5.3 Marking.

5.3.1 *Interior packages.*—Each unit carton shall be marked with stock number, nomenclature, unit, quantity, and name of contractor.

5.3.2 *Shipping container.* — Shipping container shall be marked in accordance with Specification MIL–M–3157.

6. NOTES

6.1 Ordering data. — Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Sampling required (see 4.1).
c. Inspection required (see 4.2).
d. Place of final inspection (see 4.2).
e. Whether packing for domestic or overseas shipment is required (see 5.2).

6.2 This specification covers the following item appearing in the Armed Services Catalog of Medical Materiel:

8–008–400 — Candler, Egg, Aluminum, 110 Volt, AC-DC.

6.3 This specification does not include all types, classes, grades, sizes, etc., of the commodity indicated by the title of the specification, or which are commercially available, but is intended to cover the types, etc., which are normally procured to meet Military requirements.

Source: https://assist.dla.mil -- Downloaded: 202640-16T18:12Z
Check the source to verify that this is the current version before use.

Notice.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodian:
Army—Medical Service

Other interest:
Army—T.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:12Z
Check the source to verify that this is the current version before use.

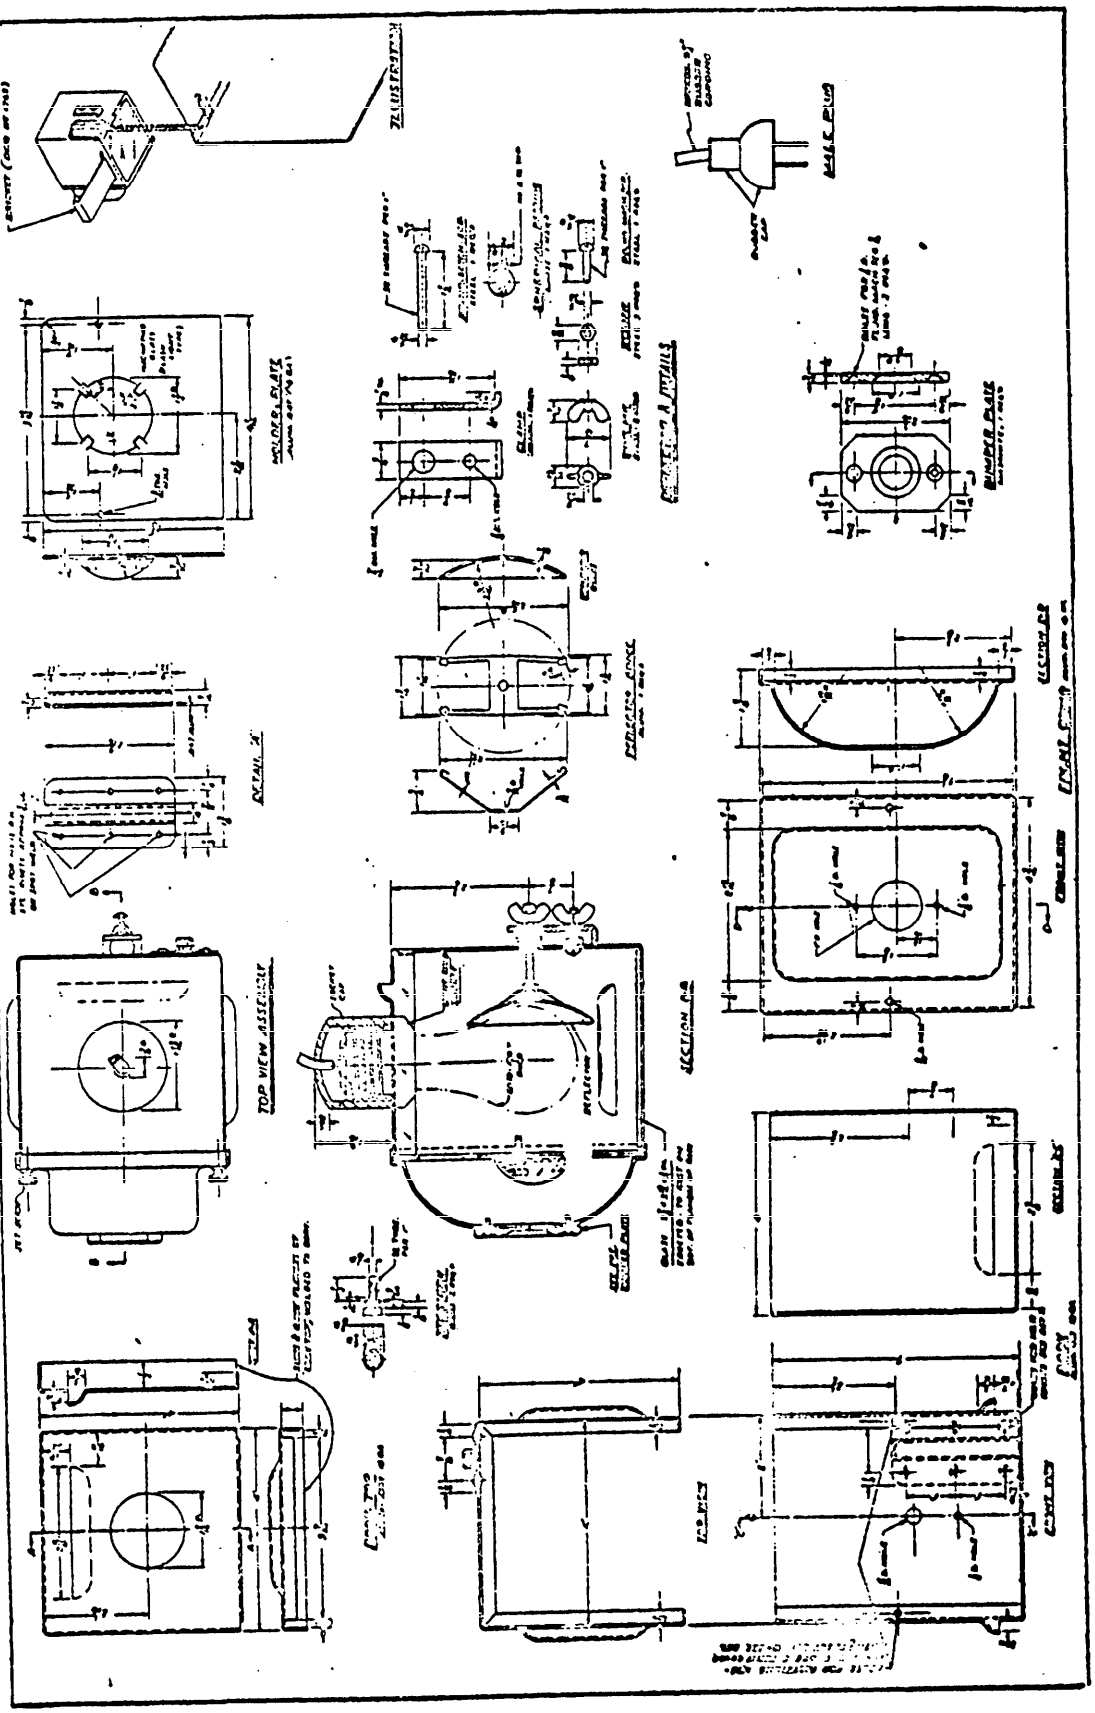


FIGURE 1.—*Candler, egg, aluminum, 110 volt, A.C.-D.C.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:12Z
Check the source to verify that this is the current version before use.