MIL-F-3541B
16 July 1965
Superseding
MIL-F-3541A
27 March 1959

MILITARY SPECIFICATION

FITTINGS, LUBRICATION

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope - This specification covers threaded lubrication fittings to be used for admitting and retaining lubricants supplied by pressure lubricating equipment.

1.2 Classification - Lubrication fittings shall be of the types designated by the type and applicable MS Standards as listed in Table I, as specified (see 6.2):

TABLE I

Fitting	Type		Thread and Material
MS 15001	I - Surface check	Straights Elbows	1/4-28 taper threads, carbon steel
MS 15002	II - Surface check	Straights Elbows	straight threads, carbon steel
MS 15003	III - Surface check	Straights Elbows	1/8 pipe threads, carbon steel
MS 15004	IV - Surface check	Straights	1/4-28 taper threads, Ni-Cu-Al alloy
		Elbows	1/4-28 taper threads, Ni-Cu alloy
MS 15005	V - Throat or Surface check	Straights	1/8 pipe threads, Ni-Cu-Al alloy
		Elbows	1/8 pipe threads, Ni-Cu alloy
MS 15006	VI - Leakproof	Straights Elbows	1/8 pipe threads, carbon steel
MS 15720	VII - Throat or Surface check	Straights Elbows	1/4-28 taper threads, corrosion-resisting steel
MS 15721	VIII - Throat or Surface check	Straights Elbows	1/8 pipe threads, corrosion-resisting steel

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:11Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents normally furnished - The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

QQ-N-281	Nickel-Copper-Alloy (Monel and R-Monel) Bars, Plates, Rods, Sheets, Strips, Wire, Forgings, and Structural and Special Shaped Sections
QQ-N-286	Nickel-Copper-Aluminum Alloy, Wrought (K-Monel)
QQ-P-416	Plating, Cadmium (Electrodeposited)
QQ-S-633	Steel Bars, Carbon, Cold Finished and Hot Rolled (General Purpose)
QQ-S-763	Steel Bars, Shapes, and Forgings - Corrosion Resisting
QQ-W-390	Wire, Nickel-Chromium-Iron Alloy
QQ-W-423	Wire, Steel, Corrosion-Resisting
QQ-Z-325	Zinc Coating, Electrodeposited, Requirements for
VV-G-632	Grease, Lubricating, Automotive and Industrial
PPP-B-566	Boxes, Folding, Paperboard
PPP-B-636	Box, Fiberboard
PPP-B-640	Boxes, Fiberboard, Corrugated, Triple Wall

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:11Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

Federal (Continued)

PPP-B-665	Boxes, Paperboard, Metal Stayed (Including Stay Material)
PPP-B-676	Boxes, Set-Up, Paperboard
PPP-T-60	Tape, Pressure Sensitive Adhesive, Waterproof - for Packaging and Sealing

Military

MIL-P-116	Preservation, Methods of
MIL-G-10924	Grease, Automotive and Artillery
MIL-G-23827	Grease, Aircraft and Instrument, Gear and Actuator Screw

STANDARDS

Federal

FED-STD-151	Metals, Test Methods

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-143	Specifications and Standards, Order of Precedence for the Selection of
MS 15000	Fittings, Lubrication - Hydraulic, Acceptable Tip Designs
MS 15001	Fittings, Lubrication (Hydraulic) Surface Check, 1/4-28 Taper Threads, Steel, Type I

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:11Z
Check the source to verify that this is the current version before use.

STANDARDS

Military (Continued)

MS 15002	Fittings, Lubrication (Hydraulic) Surface Check, Straight Threads, Steel, Type II
MS 15003	Fittings, Lubrication (Hydraulic) Surface Check, 1/8 Pipe Threads, Steel, Type III
MS 15004	Fittings, Lubrication (Hydraulic) Surface Check, 1/4-28 Taper Threads, Nickel-Copper Alloy, Type IV
MS 15005	Fittings, Lubrication (Hydraulic) Throat or Surface Check, 1/8 Pipe Threads, Nickel-Copper Alloy, Type V
MS 15006	Fittings, Lubrication (Hydraulic) Leakproof, 1/8 Pipe Threads, Steel, Type VI
MS 15720	Fittings - Lubrication (Hydraulic) Throat or Surface Check, 1/4-28 Taper Threads, Corrosion Resistant Steel, Type VII
MS 15721	Fittings - Lubrication (Hydraulic) Throat or Surface Check, 1/8 Pipe Threads, Corrosion Resistant Steel, Type VIII

PUBLICATIONS

National Bureau of Standards

Handbook H28 - Screw-Thread Standards for Federal Services

(When requesting applicable documents, refer to both title and number. Copies of unclassified documents may be obtained from the Commanding Officer, Naval Supply Depot (Code 1051), 5801 Tabor Avenue, Philadelphia, Pennsylvania 19120. Requests for copies of classified documents should be addressed to the Naval Supply Depot, via the cognizant Government inspector).

2.2 Other publications - The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:11Z
Check the source to verify that this is the current version before use.

issue in effect on date of invitation for bids or request for proposal shall apply.

Official Classification Committee Uniform Freight Classification Rules and Container Specifications

(Application for copies should be made to the Official Classification Committee, 1 Park Avenue at 33rd Street, New York, N.Y. 10016).

3. REQUIREMENTS

3.1 Selection of specifications and standards - Specifications and standards for necessary commodities and services not specified herein shall be selected in accordance with MIL-STD-143.

3.2 Materials - Materials shall conform to applicable specifications and shall be as specified herein.

3.2.1 Types I, II, III, and VI fittings -

3.2.1.1 Balls, bodies, and tips - Balls, bodies, and tips shall be carbon steel conforming to any of the chemical compositions of QQ-S-633, table I.

3.2.2 Types IV and V fittings -

3.2.2.1 Balls, straight bodies, and tips - Balls, straight bodies, and tips shall be nickel-copper-aluminum alloy conforming to QQ-N-286.

3.2.2.2 Springs - Springs shall be nickel-chromium-iron alloy conforming to QQ-W-390, condition C.

3.2.2.3 Elbow bodies - Elbow bodies shall be nickel-copper alloy conforming to QQ-N-281, class B.

3.2.3 Types VII and VIII fittings -

3.2.3.1 Balls - Balls shall be corrosion-resisting steel conforming to QQ-S-763, table II, classes 440A, 440B, or 440C.

3.2.3.2 Springs - Springs shall be corrosion-resisting steel conforming to QQ-W-423, class 302, condition B.

3.2.3.3 Elbow bodies, straight bodies, and tips - Elbow bodies, straight bodies, and tips shall be corrosion-resisting steel conforming to QQ-S-763,

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:11Z
Check the source to verify that this is the current version before use.

table II, class 303.

3.3 Design and construction -

3.3.1 Envelope - The external configuration, dimensions, and other details of the design shall conform to the requirements of this specification and the applicable MS specified in Table I.

3.3.2 Inlet tip - The contour of the inlet tip shall conform to any of the shapes and dimensions shown on MS 15000. The tip shall be integral with the body of the fitting, or securely attached thereto.

3.3.3 Threads - Threads shall be as shown on the applicable drawings and shall conform to Handbook H28.

3.3.4 Wrenching flats - All fittings shall have hexagonal wrenching flats of sufficient width to provide tip clearance for an end wrench of 1/4-inch thickness on each of the six surfaces when the fitting is screwed tightly into a tapped hole on a flat plate. No special tools shall be required for installation or removal of the fittings.

3.3.5 Check valves - All fittings shall be provided with a check valve which shall readily admit lubricant but shall prevent lubricant escape through the inlet tip.

3.3.5.1 Types I, II, III, and IV fittings - Types I, II, III, and IV fittings shall incorporate a surface ball-check valve located at the surface of the inlet tip.

3.3.5.2 Types V, VII, and VIII fittings - Types V, VII, and VIII fittings shall incorporate either a surface ball-check valve (see 3.3.5.1), or a throat ball-check valve located in the throat of the fitting.

3.3.5.3 Type VI fittings - Type VI fittings shall incorporate a synthetic-rubber check valve in the throat of the fitting.

3.4 Performance - The fitting, when mounted in any position, shall meet the performance requirements specified under 4.5 when subjected to the following tests.

(a) Accelerated aging (4.5.2)

(b) Operation (4.5.3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:11Z
Check the source to verify that this is the current version before use.

(c) Leakage (4.5.4)

(d) Blowout (4.5.5)

(e) Hardness (4.5.6)

3.5 Finish -

3.5.1 Types I, II, III, and VI fittings - All carbon steel fittings shall be cadmium plated in accordance with QQ-P-416, type I, class 3, or zinc coated in accordance with QQ-Z-325, type I, class 3 except that the salt spray test period for red rust corrosion shall be a minimum of 50 hours. Plating or coating shall be as specified in the contract or order (see 6.2).

3.5.2 Types IV, V, VII, and VIII fittings - Types IV, V, VII, and VIII fittings shall be bright dipped for cleaning only.

3.6 Marking - The fittings shall be marked for identification in accordance with the applicable MS's listed in table I.

3.7 Workmanship - The fittings shall be uniform in quality and shall be free from irregularities, defects, or foreign matter which could adversely affect safety, performance, reliability, or durability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection - All of the inspections of fittings shall be classified as quality conformance inspection.

4.3 Quality conformance inspection - Quality conformance inspection shall consist of sampling inspection only.

4.3.1 Sampling inspection - A random sample shall be selected from each inspection lot in accordance with MIL-STD-105 at the following inspection

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:11Z
Check the source to verify that this is the current version before use.

levels and acceptable quality levels (AQL's) and shall be subjected to the following inspections.

Inspection	Inspection Level	AQL % defective
(a) Examination of fitting (4.5.1)	I	1.5 Major 4.0 Minor
(b) Examination of preservation and packaging (4.5.1.1)	Same as MIL-P-116	Same as MIL-P-116
(c) Examination of packing (4.5.1.1)	II	4.0
(d) Accelerated aging (Type VI fittings only) (4.5.2)	S-2	4.0
(e) Operation (4.5.3)	S-2	4.0
(f) Leakage (4.5.4)	S-2	4.0
(g) Blowout (all types except VI) (4.5.5)	S-2	4.0
(h) Hardness (4.5.6)	S-2	4.0

4.3.1.1 Classification of defects - Defects found during examinations shall be classified in accordance with Table II.

4.4 Inspection conditions -

4.4.1 Ambient temperature and pressure - Unless otherwise specified, tests shall be conducted at an ambient temperature of 77 ± 18°F and at an ambient barometric pressure of 28 to 32 inches of mercury. All specified test pressures shall be gage pressures.

4.4.2 Inspection fluid - Type VI fittings shall be tested with grease conforming to MIL-G-23827 only; all other types shall be tested with grease conforming to any of the following: VV-G-632, type A, grade 1, MIL-G-23827, or MIL-G-10924.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:11Z
Check the source to verify that this is the current version before use.

TABLE II

Classification of Defects in Accordance with MIL-STD-105	
Major	**Minor**
Defects which might result in failure or might significantly reduce the usability of the following items for their intended purpose:	Defects which would not significantly reduce the usability of the following items for their intended purpose:
Fitting:	**Fitting:**
101 Tip profile and dimensions 102 Missing check (where applicable) 103 Missing spring (where applicable) 104 Incomplete or missing bores or holes 105 Missing threads 106 Material	201 Thread length, size, and form 202 Finish or plating (where applicable) 203 Hex, overall length, and angle (where applicable) 204 Identification
Preservation and packaging:	
101 Number per package exceeds limit specified. 102 Quantity of unit packages intermediate-packaged exceeds limit specified. 103 Gross weight of intermediate container exceeds limit specified.	
Packing:	
101 Quantity per shipping container exceeds limit specified. 102 Gross weight of shipping container exceeds limit specified. 103 Shipping containers not waterproof sealed with tape as specified.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:11Z
Check the source to verify that this is the current version before use.

4.4.3 Equipment - Unless otherwise specified, the fitting shall be tested utilizing a hand-operated lubricating gun (hand gun), hydraulic coupling (coupling), and a suitable high pressure lubricant source (high pressure hose and lubricant supply system) for all tests.

4.5 Inspection methods -

4.5.1 Examination - The fitting shall be thoroughly examined to determine conformance with this specification and applicable drawings with respect to all requirements not covered by test specified herein.

4.5.1.1 Examination of preparation for delivery - The preservation, packaging, packing, and marking of the fittings shall be examined to determine conformance with the applicable requirements of section 5 identified to referenced specifications and standards shall be inspected in accordance with the applicable requirements of these documents. The preservation, packaging and packing requirements of section 5 not identified to specifications referenced in section 5 shall be examined for applicable defects listed in 4.3.1.1.

4.5.2 Accelerated aging (type VI fittings only) - The fitting used for this test shall be free of all lubricant, both internally and externally. The fitting shall be suspended in a free-circulation air oven at a temperature of 158 ± 2°F for a period of 72 hours. Immediately following the 72 hour heating period the fitting shall be submerged in unleaded gasoline at a temperature of 80 ± 2°F for a period of 48 hours. The fitting shall then withstand a back-pressure of 3,000 psi, applied to the threaded end of the fitting without rupture of component parts or leakage through the inlet tip.

4.5.3 Operation -

4.5.3.1 Extreme angular position - The fitting shall be assembled into a hand gun and coupling. The longitudinal axis of the hand gun and coupling shall be displaced 10^{+1}_{-0} degrees from the longitudinal axis of the fitting (see MS 15000). The fitting shall admit lubricant. This test shall be repeated with the hand gun and coupling realigned to the opposite angular position of 10^{+1}_{-0} degrees displacement.

4.5.3.2 Opening pressure - The fitting shall be tested utilizing a test set-up similar to figure 1. Pressure shall be applied to the inlet tip until the check valve opens (lubricant flows from the threaded end of the fitting). This pressure shall not exceed the applicable value given in table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:11Z
Check the source to verify that this is the current version before use.

TABLE III

Fitting Type	Maximum Opening Pressure-psi
I, II, and III	450
IV, V, VI, VII, and VIII	650

4.5.4 Leakage -

4.5.4.1 Lubricant leakage - The fitting shall be tested utilizing a test set-up similar to figure 2. Lubricant shall be forced into the fitting until the applicable pressure specified in table IV is reached. The coupling shall be disconnected from the fitting tip and rate of lubricant leakage from the tip shall be determined. Leakage from the fitting tip shall not exceed the applicable value given in table IV.

TABLE IV

Fitting Type	Test Gage Block Pressure-psi	Leakage
I, II, III, IV, V, VII, and VIII	5,000	2 cc per minute maximum
VI	3,000	zero

4.5.4.2 Gasoline leakage (type VI fittings only) - The fitting shall have a static head of 24 ± 1 inches of unleaded gasoline applied to the threaded end for a period of 120 seconds. Leakage of gasoline from the inlet tip of the fitting shall not exceed 10 drops per minute.

4.5.5 Blowout (all types except type VI) - The fitting shall be installed in a test set-up similar to figure 3 and shall be tested as follows:

(a) The power lubrication system shall be charged to a pressure within the applicable pressure range specified in table V. The power control valve shall be opened and lubricant shall be discharged through the fitting for a period of 5 seconds. The coupling shall be disconnected from the inlet tip of the fitting, and the fitting ball-check and spring shall be examined. The ball-check shall have returned to the closed position and there shall be no evidence of loosening.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:11Z
Check the source to verify that this is the current version before use.

damage or blowout of component parts.

(b) Repeat item (a).

(c) The fitting shall be disassembled or sectionalized, as applicable. There shall be no evidence of damage to any component part.

TABLE V

Fitting Type	Allowable Pressure Range-psi
I, II, and III	8,000 to 8,100
IV, V, VII, and VIII	6,000 to 6,100

4.5.6 Hardness - The fitting shall be tested for hardness in accordance with method 242 or 243, as applicable, of FED-STD-151. The hardness shall conform to the applicable value specified in table VI.

TABLE VI

Fitting Type	Fitting Area	Hardness of Fitting Area
I, II, and III	Tips (surface making contact with the nozzle or coupling of the lubricating gun) of all fittings.	Case hardened to a depth of 0.005 to 0.009 inch with a minimum reading of 83 on 15-N scale of Rockwell superficial hardness test machine
IV and V	Tips of all fittings, and surface of all balls.	Heat treated to a minimum hardness of 270 Brinell (3,000 kilogram load, 10 mm ball) or Rockwell hardness No. 27 on the "C" scale (150 kilogram load)
VI	Tips of all fittings.	Case hardened to a depth of 0.002 to 0.005 inch with a minimum reading of 83 on 15-N scale of Rockwell superficial hardness test machine
VII and VIII	Tips of all fittings, and surface of all balls.	Balls: Minimum hardness of No. 40 on the Rockwell "C" scale (150 kilogram load) Fitting tips: Minimum hardness of No. 92 on the Rockwell "B" scale

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:11Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging -

5.1.1 Level A - Unless otherwise specified, fittings in a unit quantity of 50 each, of the same part number, shall be packaged in accordance with method III of MIL-P-116. Fittings shall be packaged in unit containers conforming to PPP-B-566 or PPP-B-676.

5.1.2 Weight count method for small parts - The number of units per unit package may be determined by net weight provided that this method of obtaining such weight is so adjusted that the contents of the package are within the following limits:

Number per package	Permissible percent variation
25	±4
50	±2
100	±2
200	±1
300	±1
500	±1
1,000	±0.5

5.2 Intermediate packaging - When the quantity permits, five unit packages or a multiple thereof shall be further packaged in intermediate containers conforming to PPP-B-566, PPP-B-636 class domestic, PPP-B-676, or PPP-B-665. The gross weight of the intermediate containers conforming to PPP-B-665 shall not exceed 40 pounds.

5.2.1 Level C - The fittings shall be packaged in accordance with commercial practice.

5.3 Packing - Fittings, packaged level A or C, shall be packed level A, B, or C as specified in contract or order (see 6.2).

5.3.1 Quantity per shipping container - The quantity per shipping container shall be as specified in the contract or order. In the absence of specified quantities, the weight limitations in 5.3.2 and 5.3.3 shall apply.

5.3.2 Level A - Fittings shall be packed in overseas type boxes

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:11Z
Check the source to verify that this is the current version before use.

conforming to either of the following: PPP-B-636, class weather-resistant or PPP-B-640, class 2 (see 6.2). Fiberboard boxes shall not exceed the weight limitations of the box specification. Box closures shall be in accordance with the box specification and the appendix thereto. The joints and seams of all boxes shall be sealed with tape conforming to PPP-T-60.

5.3.3 Level B - Fittings shall be packed in domestic-type boxes conforming to either of the following: PPP-B-636, class domestic, or PPP-B-640, class 1. Boxes shall not exceed the weight limitations of the box specification. Box closures shall be in accordance with the box specification and appendix thereto.

5.3.4 Level C - The fittings shall be packed to insure carrier acceptance and safe delivery to destination at the lowest applicable rate. Containers shall comply with the requirements of Uniform Freight Classification Rules and Container Specifications or other carrier regulations applicable to the mode of transportation.

5.4 Marking of shipments - Interior and exterior shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use - The fittings covered by this specification are intended for use on aircraft, ground vehicles, submarines, surface vessels, and industrial equipment, where suitable.

6.2 Information for contracting officer - Contracts or orders should specify the following:

(a) Title, number, and date of this specification
(b) Type and MS part number required (see 1.2)
(c) Quantity per shipping container when required (see 5.3.1)
(d) Selection of applicable levels of preservation, packaging, and packing required
(e) Type of plating required (see 3.5.1)
(f) Fittings subjected to tests (see 4.3.1) are not to be considered or shipped as part of the contract or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:11Z
Check the source to verify that this is the current version before use.

(g) Items of data required (see 6.3)

6.3 Data - For the information of Contractors and Contracting Officers, any of the data specified in (a) applicable documents listed in Section 2 of this specification, or (b) referenced lower-tier documents need not be prepared for the Government and shall not be furnished to the Government unless specified in the contract or order. The data to be furnished shall be listed on DD Form 1423 (Contractor Data Requirements List), which shall be attached to and made a part of the contract or order.

6.4 Supersession data - Types I and III lubrication fittings of this specification supersede MIL-G-1833, type A lubrication fittings, with the exception of the fitting depicted by figure 7 therein. Types IV and VI lubrication fittings of this specification supersede MIL-G-1833, type B lubrication fittings, with the exception of the fitting depicted by figure 7 therein.

6.5 International standardization agreements - Certain provisions (see 3.3.2) of this specification are the subject of international standardization agreement (ABC AIR STD 17/8B Grease Nipples) When amendment, revision, or cancellation of this specification is proposed, the departmental custodians will inform their respective Departmental Standardization Offices so that appropriate action may be taken respecting the international agreement concerned.

6.6 Changes from previous issue - The extent of changes (deletions, additions, etc.) preclude the annotation of the individual changes from the previous issue of this document.

Custodians:

Army-WC

Navy-WP

Air Force-11

Review Activities:

Army-WC, MO, MR

Navy-WP, YD, SH

Air Force-11, 69

User Activities:

Army-MU, CE

Navy-MC

International Interest (see 6.5)

Preparing Activity:

Navy-WP

DOD Project No. 4730-0126

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:11Z --
Check the source to verify that this is the current version before use.

Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current Federal Supply Classification Listing of DoD Standardization Documents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:11Z
Check the source to verify that this is the current version before use.

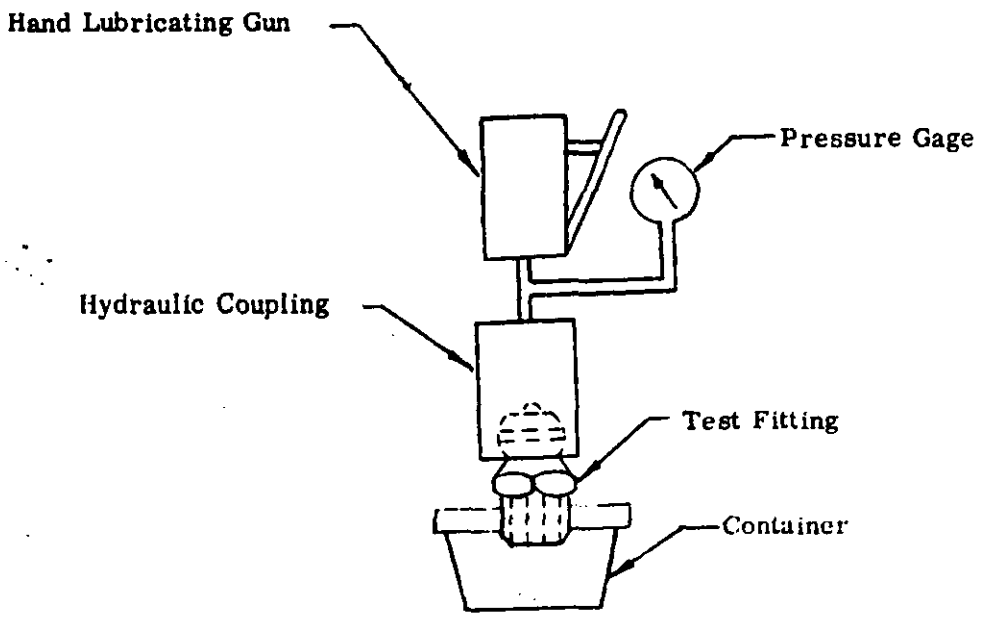


Figure 1. Extreme angular position, and opening pressure test set-up

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:11Z
Check the source to verify that this is the current version before use.

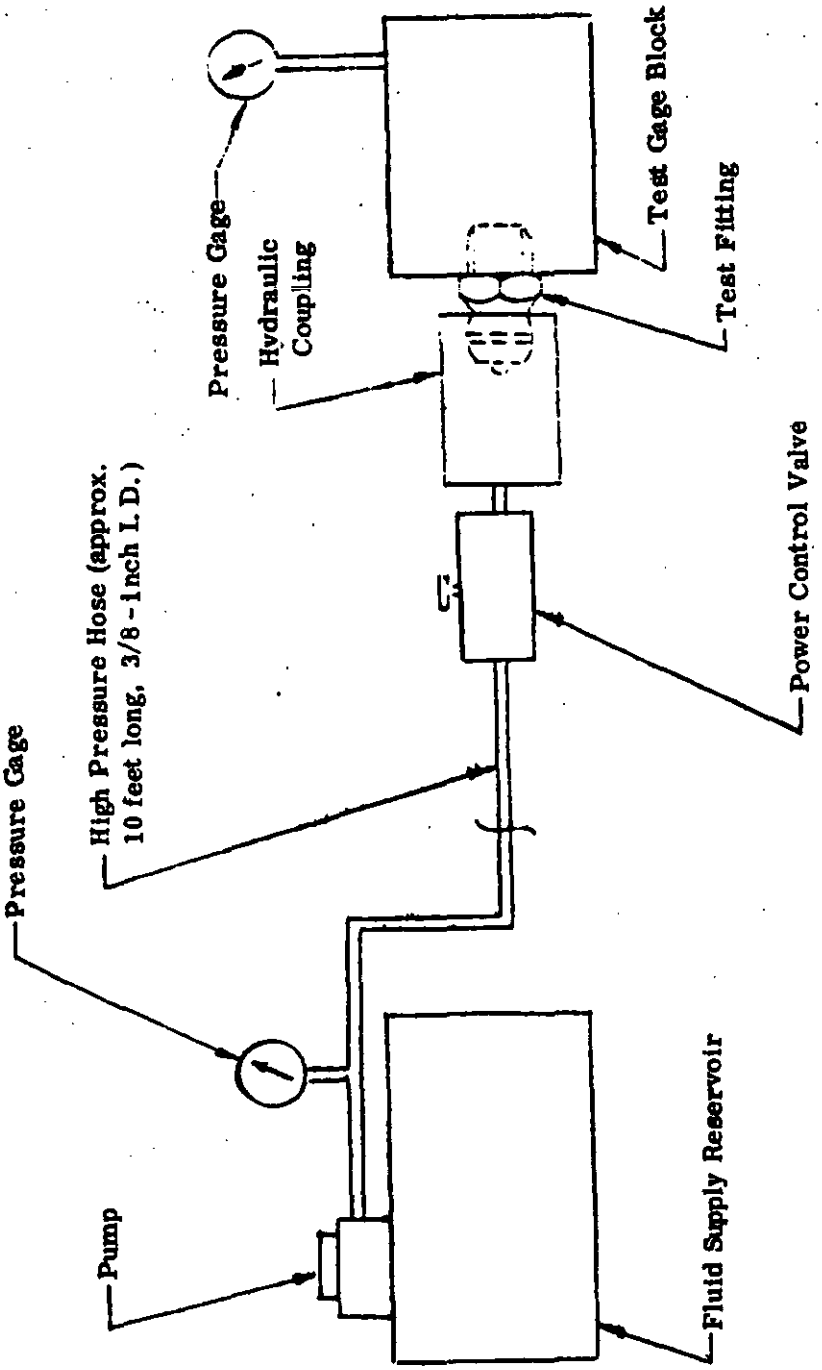


Figure 2. Leakage test set-up

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:11Z
Check the source to verify that this is the current version before use.

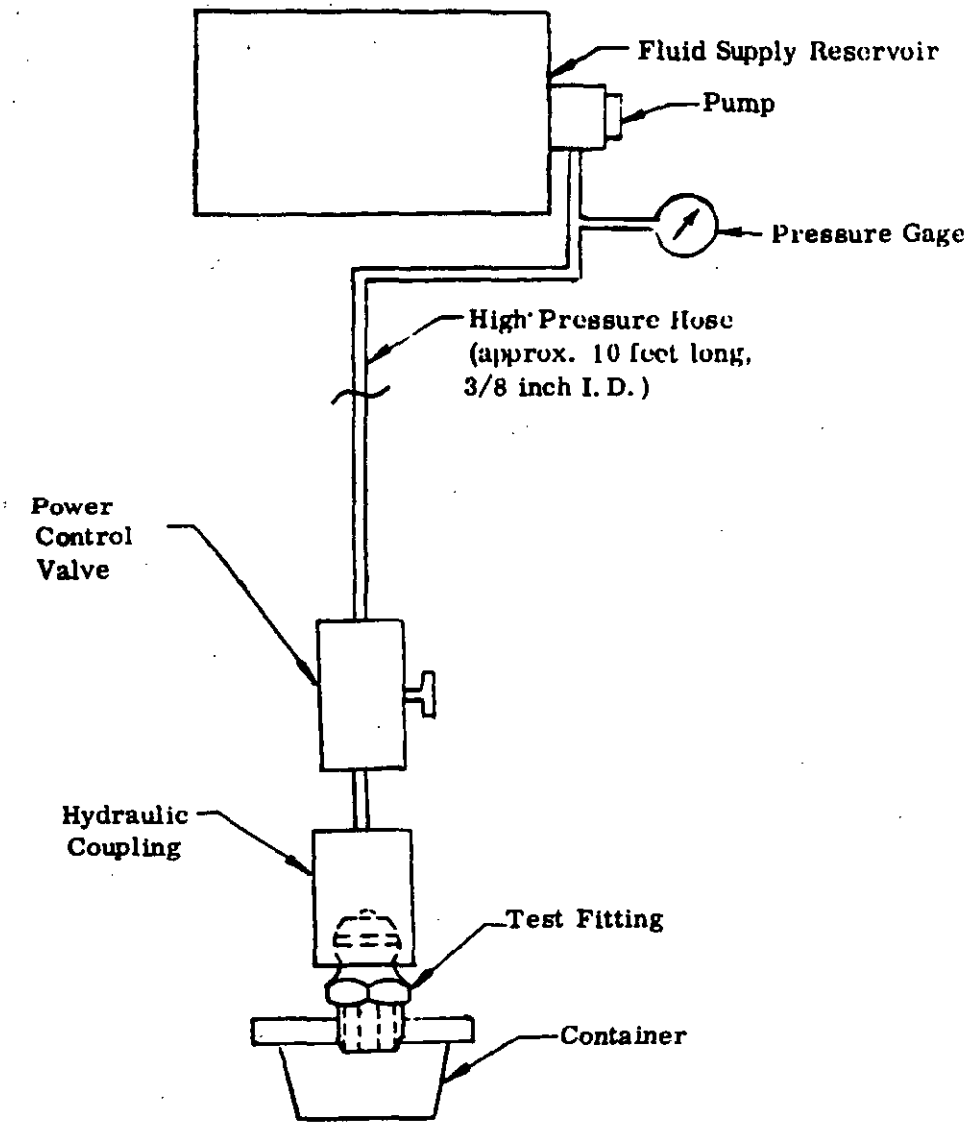


Figure 3. Blowout test set-up

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:11Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use submitting comments and suggestions for improvements. All users of military standardization documents are invited to provi suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, a mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
NAval Air Engineering Center
Engineering Specifications and Standards
Department (ESSD) Code 93
Lakehurst NJ 08733

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:11Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS M, CUT ALONG LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:11Z
Check the source to verify that this is the current version before use.