MIL-H-3496D(ME)
29 March 1984

SUPERSEDING
MIL-H-3496C
31 July 1974

MILITARY SPECIFICATION

HOOKS, BOAT (BALL POINT)

This specification is approved for use by the Belvoir Research and Development Center, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers wooden handle boat hooks.

1.2 Classification. The boat hooks shall be the following sizes, as specified (see 6.2):

Size A - with handle 1-1/2 inches diameter, 96 inches long

Size B - with handle 1-1/2 inches diameter, 120 inches long

Size C - with handle 2 inches diameter, 144 inches long

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research and Development Center, ATTN: STRBE-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 2040

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:06Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

FF-R-556	- Rivet, Solid, Small; Rivet, Split, Small; Rivet, Tubular, Small; Flat Washer (Burr); and Cap, Rivet; General Purpose.
NN-H-81	- Handles, Ash, For Tools.
QQ-C-390	- Copper Alloy Castings (Including Cast Bar).
TT-V-119	- Varnish, Spar, Phenolic Resin.
PPP-B-601	- Boxes, Wood, Cleat-Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner.
PPP-B-640	- Boxes, Fiberboard, Corrugated, Triple Wall.

MILITARY

MIL-G-20241	- Gasket Material, Wool Felt, Impregnated, Adhesive, Pressure-Sensitive.
MIL-S-81733	- Sealing and Coating Compound, Corrosion Inhibitive.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-889	- Dissimilar Metals.

(Copies of specifications and standards required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 47 - Malleable Iron Castings.
ASTM A 153 - Zinc Coating (Hot Dip) on Iron and Steel - Hardware.
ASTM D 3951 - Standard Practice for Commercial Packaging.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:06Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal Agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Description. The boat hooks shall consist of a cast metal hook riveted to a wooden handle. The configuration of the boat hooks, the length of the hooks, and the length and diameter of the handles, shall be as shown on figure 1.

3.2 Materials. Materials shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.3).

3.2.1 Material deterioration and control. The boat hooks shall be fabricated from compatible materials, inherently corrosion and deterioration resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable storage and operating environments to which the item may be exposed.

3.2.1.1 Dissimilar metals. Dissimilar metals, as defined in MIL-STD-889, shall be electrically insulated from one another to minimize or prevent galvanic corrosion. Insulation may be provided by an insulating barrier such as a corrosion inhibiting sealant conforming to MIL-S-81733 or chromate tape conforming to MIL-G-20241. Protection against any galvanic corrosion could also be obtained by exclusion of the electrolyte if feasible.

3.2.1.2 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with components and sub-components, and shall make information available, upon request, to the contracting officer or designated representative.

3.2.2 Castings. The hooks shall be cast malleable iron conforming to ASTM A 47, grade 35018, zinc-coated in accordance with ASTM A 153, or yellow brass (manganese bronze) conforming to QQ-C-390, alloy 861-870, type I.

3.2.3 Handle. The wooden handle of the boat hook shall conform to NN-H-81, grade B, ash wood.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:06Z
Check the source to verify that this is the current version before use.

3.2.4 Rivets. The rivets shall be 1/4 inch diameter, steel or brass, conforming to FF-R-556, type VI, grade E or F, as applicable; steel rivets shall be furnished with iron hooks, and brass rivets with brass hooks. Steel rivets shall be zinc plated.

3.3 Construction. The construction of the boat hook shall be as shown on figure 1 and as specified herein. When tested as specified in 4.4.2, there shall be no evidence of permanent deformation, separation, cracking, loosening, or any other evidence of failure in the boat hook.

3.3.1 Hook. The hook shall be cast of material as specified in 3.2.2, in a configuration similar to that as shown on figure 1, with a hollow tapered shank of approximately 5-1/2 inch depth. Two holes, normal to each other, with a diameter of not more than 5/16 inch to permit passage of the 1/4 inch diameter rivets shall be provided in the shank (see figure 1). The cast hook shall be free of blowholes, porosity, cracks, splits, distortion, or other injurious defects.

3.3.2 Handle. One end of the handle shall be rounded and the other end shall have a tapered section conforming to the taper of the hook shank. The dimensions of the shoulder on the large end of the tapered section shall insure that the outside diameter of the metal shank is flush with the handle when assembled. The handle shall have two holes drilled in its tapered end, normal to each other of similar location and diameter as the holes in the hook, in order to aline the assembly of the boat hook. The handle shall be straight and free from cracks and splits.

3.3.3 Assembly. The boat hook shall be assembled by inserting and forcing the tapered end of the handle as far as possible into the shank end of the hook. Two metal rivets as specified in 3.2.4 shall extend through the respective holes of the handle and hook, in order to fasten the two parts together to form the boat hook. The unheaded ends of the two rivets, after passage through the mated hook and handle, shall be neatly and completely headed-over.

3.4 Coatings. The handle of the boat hook shall be given not less than two coats of varnish conforming to TT-V-119. The handle shall be sanded smooth prior to and subsequent to the first coat of varnish. Malleable iron hooks shall be zinc coated.

3.5 Identification marking. The boat hook shall be identified in accordance with MIL-STD-130. The identification shall include the applicable National Stock Number and the letters "US".

Source: https://assist.dla.mil -- Downloaded: 20260-16T18:06Z
Check the source to verify that this is the current version before use.

3.6 Workmanship. The boat hook shall be free from cracks, splits, splinters, sharp edges, or any other defects that could impair its serviceability or be injurious to personnel using it. The handle shall not be loose in the shank of the hook. The headed-over ends of the rivets shall be smooth and shall have no sharp protruding edges.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.2 Classification of inspections. Inspection requirements specified herein are classified as follows:

a. Quality conformance inspection (see 4.3).

b. Inspection of packaging (see 4.5).

4.3 Quality conformance inspection.

4.3.1 Sampling. Sampling for examination and tests shall be in accordance with MIL-STD-105, inspection level S-4.

4.3.2 Examination. Samples selected in accordance with 4.3.1 shall be examined for major and minor defects specified in 4.4.1. AQL shall be 2.5 percent defective for major defects and 4.0 percent defective for minor defects.

4.3.3 Test. Samples selected in accordance with 4.3.1 shall be tested as specified in 4.4.2.1. AQL shall be 2.5 percent defective.

4.4 Inspection procedure.

4.4.1 Examination. The boat hooks shall be examined as specified herein for the following defects:

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:06Z
Check the source to verify that this is the current version before use.

Major

101. Material not as specified.
102. Materials not resistant to corrosion and deterioration or treated to be resistant to corrosion and deterioration for the applicable storage and operating environments.
103. Dissimilar metals not in accordance with MIL-STD-889.
104. Contractor does not have documentation available for identification of material, material finishes or treatment.
105. Boat hook construction not as specified.
106. Dimensions not as specified.
107. Hook cracked, split, distorted or otherwise not as specified.
108. Handle curved, cracked, split or otherwise not as specified.
109. Handle loose in shank of hook.
110. Coatings of boat hook components not as specified.
111. Workmanship not as specified.

Minor

201. Identification marking missing, incorrect, or illegible.

4.4.2 Test.

4.4.2.1 Pull test. The handle of the assembled boat hook shall be secured to a stationary object. A tensile or dead weight load of 300 pounds shall then be applied to the hook, with the force being applied in the direction of the longitudinal axis of the boat hook away from the secured end of the handle. Nonconformance to 3.3 shall constitute failure of this test.

4.5 Inspection of packaging.

4.5.1 Quality conformance inspection of pack.

4.5.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.5.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.5.1.3 Examination. Samples selected in accordance with 4.5.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

No	Defect	A	B	Comm.
112.	Hook casting not preserved as specified.	5.1.1	5.1.1	5.1.1
113.	Hooks of unlike description packed together.	5.2.1	5.2.2	5.2.3

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:06Z
Check the source to verify that this is the current version before use.

No	Defect	A	B	Comm.
114.	Boxes not as specified.	5.2.1	5.2.2	5.2.3
115.	Weight of contents exceed limitations of box specification.	5.2.1	5.2.2	5.2.3
116.	Strapping not flat as specified.	5.2.1	5.2.2	
117.	Strapping not finish B as specified for level A.	5.2.1		
118.	Marking not as specified.	5.3.1	5.3.1	5.3.2

5. PACKAGING

5.1 Preservation.

5.1.1 Level A, level B and commercial. The complete hook casting shall be wrapped with cushioning material of such quantity and type to provide adequate protection against damage during handling and storage. The cushioning material shall be secured in position with tape or twine.

5.2 Packing. Packing shall be level A, level B or commercial as specified (see 6.2).

5.2.1 Level A. Hooks of like description, preserved as specified in 5.1.1 shall be packed in a close-fitting box conforming to PPP-B-601, overseas type, style optional or PPP-B-621, class 2, style optional in quantities not to exceed the weight limitations of the applicable box specification. Box closure and strapping shall be as specified therein except that strapping shall be flat and finish shall be B.

5.2.2 Level B. Hooks of like description, preserved as specified in 5.1.1, shall be packed as specified in 5.2.1 except that boxes shall be domestic type or class and that strapping need not be finish B. Alternatively, preserved, like hooks may be placed in a close-fitting box conforming to PPP-B-640, class 2, style optional. The closure and strapping of the fiberboard box shall be as specified therein and the strapping need not be finish B.

5.2.3 Commercial. Hooks of like description preserved as specified in 5.1.1, shall be packed in accordance with ASTM D 3951.

5.3 Marking.

5.3.1 Level A and level B. In addition to any special or other identification marking required by the contract or purchase order (see 6.2), each shipping container shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:06Z
Check the source to verify that this is the current version before use.

5.3.2 Commercial. Commercial marking shall be as specified in ASTM D 3951.

6. NOTES

6.1 Intended use. The boat hook is intended for use in handling pontons, small marine craft, and amphibious vehicles.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Size of boat hook required (see 1.2).

c. Degree of packing required (see 5.2).

d. Any special markings (see 5.3.1).


6.3 Recycled material. It is encouraged that recycled material be used, when practical, as long as it meets the requirements of this specification (see 3.2).

Custodian:
A - ME

Preparing activity:
Army - ME

Project 2040-0147

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:06Z
Check the source to verify that this is the current version before use.

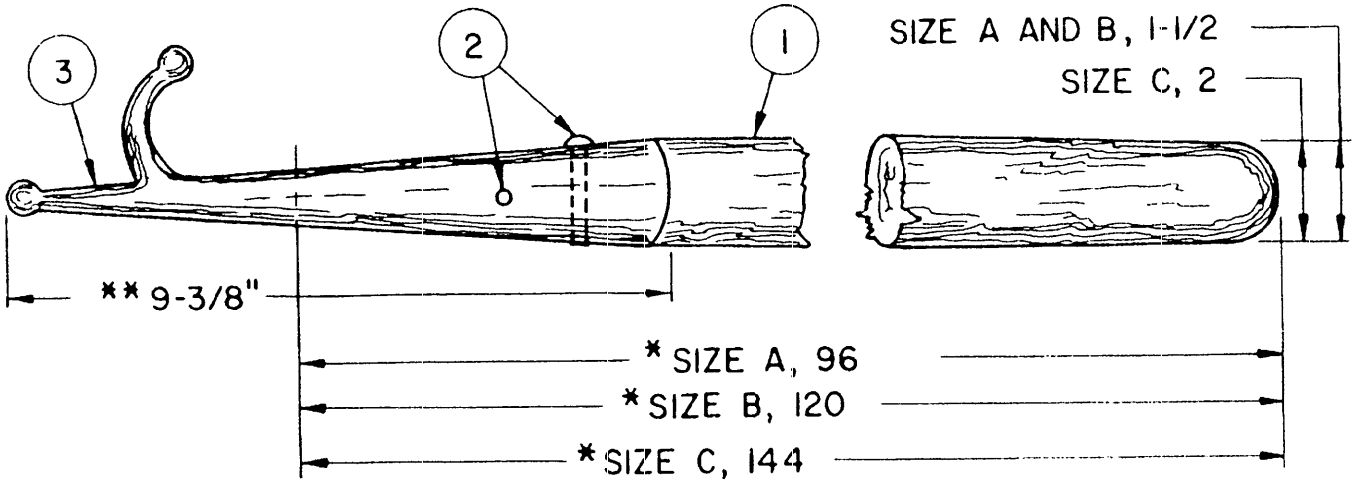

* OVERALL LENGTH OF WOODEN HANDLE
** OVERALL LENGTH OF METAL HOOK

TOLERANCE:

LENGTH OF HANDLE ± 1 INCH
DIAMETER OF HANDLE ± 1/8 INCH
LENGTH OF METAL HOOK ± 1/4 INCH

(1) HANDLE
(2) RIVETS (2 REQ'D)
(3) HOOK

NOTE:

DIMENSIONS ARE IN INCHES.

FIGURE 1. Design and dimensions of ball point boat hook.

X-2663A

MIL-H-24600(NE)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:06Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-H 3496_D	Hooks, Boat (Ball Point)

ZATION	4. TYPE OF ORGANIZATION *(Mark one)* ☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-16T18:06Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Belvoir R & D Center
ATTN: STRBE-DS
Fort Belvoir, VA 22060

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:06Z
Check the source to verify that this is the current version before use.

4.4.5 Intermediate packaging - Intermediate packages shall be packaged in