NOT MEASUREMENT SENSITIVE


MIL-I-3575/1B
15 February 1990
SUPERSEDING
MIL-I-3575/1A
31 March 1969

MILITARY SPECIFICATION SHEET

INSIGNIA, AIDE, PRESIDENT OF THE UNITED STATES, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

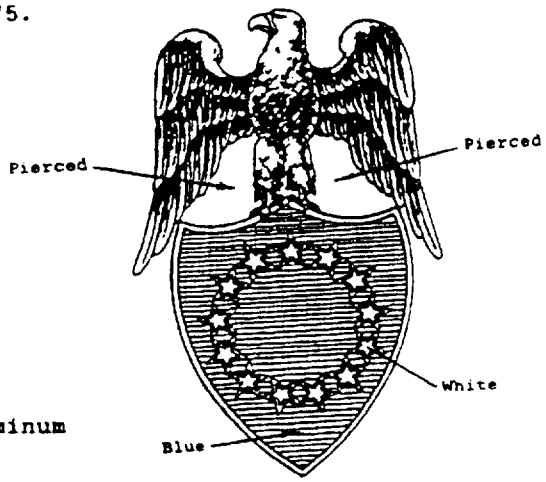

Dash No:
-1: Regular
-2: Subdued

MATERIAL:
-1: Gilding metal
-2: Red brass or zinc aluminum

DIMENSIONS:

EAGLE AND SHIELD:
HEIGHT (Overall): 1 1/4 Inch (3.18 cm) (REF)
THICKNESS (At thickest point on shield): .080 inch ± .005 inch (0.203 cm) ± (0.012 cm)

FINISH:
-1: EAGLE: Gold plated, matte finish with polished edges
SHIELD: Hard enameled, gold plated with polished highlights
-2: Dull flat black enamel

NOTES:
1. Enamel areas for Dash No. 1 shall be as indicated. The enamel color shall match the TIOH color chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Blue	20
White	28

2. Attaching device shall be prong and clutch type. The prongs shall be located on the vertical center line equidistant from each end and 7/8 inch ± 1/64 inch (2.22 cm) ± (0.04 cm) apart.
3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer.
4. The enamel for Dash No. 2 shall match Chip No. 37038 of FED-STD 595.
5. Pierced areas shall be as indicated.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

Project No. 8455-0447

User activity:
Army - SM

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:14Z
Check the source to verify that this is the current version before use.