MILITARY SPECIFICATION

COAT, FOOD HANDLER'S; COTTON AND POLYESTER TWILL; WHITE; WITH POCKET

1. SCOPE

*1.1 Scope. This specification covers requirements for a white cotton and polyester twill, double breasted coat with breast pocket.

1.2 Classification. The coats shall be of one type in the following sizes as specified (see 6.2):

Schedule of sizes

32 34 36 38 40 42 44

2. APPLICABLE DOCUMENTS

*2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-280	- Thread, Cotton Gimp, Buttonhole.
V-T-285	- Thread, Polyester.
UU-P-268	- Paper, Kraft, Untreated, Wrapping.
CCC-C-446	- Cloth, Muslin, Cotton.
DDD-L-20	- Label; For Clothing, Equipage, And Tentage (General Use).
DDD-T-86	- Tape, Textile; Cotton, General Purpose (Unbleached, Bleached Or Dyed).

MILITARY

MIL-B-3461	- Buttons, Insignia, Metal, Uniform And Cap.
MIL-B-17757	- Boxes, Fiber, Corrugated (Modular Sizes).
MIL-C-28956	- Cloth, Twill; Cotton And Polyester.

STANDARDS

FEDERAL

FED-STD-751	- Stitch, Seam, And Stitching.

MILITARY

MIL-STD-105	- Sampling Procedures And Tables For Inspection By Attributes.
MIL-STD-129	- Marking For Shipment And Storage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

*2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE
Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, 202 Chicago Union Station, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Sample. Samples are furnished solely for guidance and information to the supplier (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

*3.2 First article approval. Unless otherwise specified (see 6.2), before production is commenced, the first article consisting of the number of finished coats specified by the procuring activity (see 6.2) shall be submitted, or made available to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all provisions of this specification. The first article shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production items.

*3.3 Materials.

*3.3.1 Basic material. The basic material shall be cloth, cotton and polyester 6.5 to 7.0-ounce, white shade 2412 (see 6.3), conforming to class 1 of MIL-C-28956.

*3.3.2 Bias binding. The binding for the raw edges of armholes and for making the coat hanger shall conform to class 5, type III of CCC-C-446, except the total nonfibrous material shall be between 5 and 10 percent. The bias binding shall have sized edges to prevent raveling.

*3.3.3 Polyester thread. The thread for seaming, stitching, buttonholes, bartacks and eyelets shall be polyester conforming to type I, class 1, size A, 3-ply of V-T-285. The color of the thread shall be white shade AG, Cable No. 66049.

*3.3.4 Gimp. The buttonhole gimp shall be cotton, No. 8 soft or glazed finish, conforming to type I or type II of V-T-280. The color of the gimp shall be white shade AG, Cable No. 66049.

*3.3.5 Tape, cotton. The tape for the breakline of the lapels shall be 1/4 inch wide, preshrunk, conforming to type III, class 2 of DDD-T-86.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

*3.3.6 Insignia buttons. Unless otherwise specified (see 6.2), insignia buttons shall be furnished with the coat. The insignia buttons shall be metal, gold plated, enlisted design, 40-line. The buttons shall conform to type I, style 3, class A, subclass 2 of MIL-B-3461. Four buttons are required for each coat.

*3.3.6.1 Ring toggles. When buttons are furnished, ring toggles for securing buttons to coat shall conform to MIL-B-3461.

*3.3.7 Labels. Each coat shall have a combination identification-instruction label and a size label. The labels shall show fastness to laundering.

*3.3.7.1 Identification-instruction label (combined). The identification-instruction label shall conform to type I, classes 1 and 3 (combined) of DDD-L-20 and shall measure not less than 5-1/2 by 2-1/2 inches. The content and format shall be as follows:

Nomenclature (item description)
Contract number
Name of contractor
Fiber Contents Act information

LAUNDERING AND PRESSING INSTRUCTIONS

Remove metal buttons

1. Hand laundering.

   a. Launder in warm water using mild soap.
   b. Scrub soiled areas.
   c. Rinse thoroughly in clear warm water.
   d. Dry without wringing.

2. Machine laundering.

   a. Use a mild detergent.
   b. Complete washing cycle for 30 minutes in 120° to 140° F water.
   c. Rinse thoroughly in clear warm water.
   d. Set automatic dryer for regular fabrics and dry for 15 minutes.

3. Pressing.

   a. If pressing is required use a cool iron.

DO NOT USE AUTOMATIC IRON ABOVE RAYON SETTING

DO NOT USE HOT IRON

*3.3.7.2 Size label. The size label shall conform to type I, class 2 of DDD-L-20. The size shall consist of the numerical designation specified in 1.2 and the stock number as shown in the following example:

38
Stock number

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

The stock number may be omitted from the size label, but when omitted it shall be included in the identification-instruction label.

*3.4 Design. The coat shall be the U. S. Marine Corps design shown on Figures 1, 2 and 3; a semiformfitted, double breasted coat; having two worked eyelets in each front for removable insignia buttons; one breast pocket on left front; waist and underarm darts; two-piece back; long sleeves; a roll collar and semi-peaked lapels.

*3.5 Patterns. Standard patterns will be furnished by the Government. The standard patterns shall not be altered in any manner and shall be used only as a guide for cutting working patterns. The standard patterns provide 1/2-inch seam allowance for double-lapped and double-stitched seams and 1/4-inch seam allowance for all other seams, except as otherwise specified in Table I. Standard patterns show size, seam allowances, directional lines for cutting and are marked or notched for proper placement and assembly of the component parts.

*3.5.1 List of pattern parts. Coats shall be cut from the materials specified herein in accordance with the pattern parts indicated below:

Item	Pattern parts Material: Cloth, cotton/polyester twill	No. of cut parts
1.	Front	2
2.	Front interlining	2
3.	Front facing	2
4.	Back	2
5.	Topcollar	1
6.	Undercollar	1
7.	Collar interlining	1
8.	Topsleeve	2
9.	Undersleeve	2
10.	Breast pocket, top-ply	1
11.	Breast pocket, under-ply	1
	Shapers	
	Finished lapel shaper with collar	
	Marker	
	Undercollar stand marker	

*3.6 Construction

*3.6.1 Manufacturing requirements. Coats shall be manufactured in accordance with the operations and the stitch, seam, and stitching types specified in Table I.

*3.6.1.1 Operations. The supplier is not required to follow the exact sequence of operations as listed in Table I but all operations specified shall be used to manufacture the coats.

*3.6.1.2 Stitches, seams, and stitchings. The stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. Where stitch type 401 is used, the looper (under-thread) shall be on the inside of the coat. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted. Overedge stitching shall be done on serging machine with a knife attachment properly set to trim the raveled edge without cutting the material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

*3.6.1.2.1 Ends of seams and stitching. Ends of seams and stitching (stitch type 301), except the ends of a continuous line of stitching, when not caught in another seam or stitching, shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. When stitch type 401 is used, ends of seams and rows of stitchings shall be caught in other seams or rows of stitching, and skipped stitches and thread breaks may be repaired using stitch type 301 backstitched not less than 1/2 inch on each side of the skip or break.

*3.6.1.3 Shade marking. The component parts of the coat, except parts cut from ends, shall be marked to insure a uniform shade and size throughout the garment. Any method of shade marking may be used except:

(a) Corrosive metal fastening devices,

(b) Sew on shade tickets,

(c) Adhesive type tickets which show discoloration and the adhesive mass which adheres to the material upon removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
1.	Cutting.					
	a. Cut the coat in strict accordance with the patterns furnished by the Government.					
	b. Cut the material in the direction indicated by the directional lines on the pattern.					
	c. Cut the coat from one piece of basic material, except the front interlining, undercollar, collar interlining and underply of breast pocket may be cut from ends.					
	d. Front facings shall be cut with the inner edge on the selvage.					
2.	Replacement of damaged parts.					
	a. Replace at time of cutting any part of the coat containing holes or seriously weakening defects such as smashes, multiple floats, loose or weakening slubs, etc., expected to develop into holes, shade bars and dye streaks or unsightly slubs, etc.					
	b. Replace any parts damaged during manufacturing process by needle chews which may be expected to develop into a hole, scissor or knife cut, tears, holes, mends, burns and large drill holes.					
3.	Shade marking.					
	a. Mark all component parts (see 3.6.1.3) cut from one piece of basic material, in order to insure a uniform shade, size and proper assembly throughout the coat.					
4.	Make coat hanger.					
	a. Fold the bias binding for the coat hanger in half lengthwise, turning the edges to the inside to finish 1/4 inch wide, and seam 1/16 inch from the turned edge.	301	SSc-1	10-14	A	A
	b. Cut the hanger 3 ±1/8 inches long.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g	Stitches Per Inch	THREAD Needle	THREAD Bobbin or Looper
5.	Make pocket. Finished appearance. The pocket shall be uniformly stitched and shall finish smooth and flat without twists, gathers, puckers or pleats. The hemmed top edge of the ply shall be lapped on the top edge of the under ply. Pockets shall conform to the measurements in Table III. a. The pocket shall be made of two plies of basic material. b. Form the hem in the top ply of the pocket in accordance with the notches as indicated by pattern, with raw edge turned up and the hem to finish 1 ±1/8 inches wide. c. Stitch each side of pocket 1/8 inch from edges, the width of hem. d. Position the under ply face to face with the top ply and with the upper edge of the under ply in line with the folded notches and with side and bottom edges even. Stitch through all plies 1/4 inch from sides and bottom edges. e. Turn the pocket, working the edges out completely. Turn the hem of the top ply completely, working out the corners and the seamed edges and lap on the outside of the underply. f. Stitch the hem of the pocket through the under ply 1/8 inch from the upper folded edge and 1/16 inch from lower folded edge. The stitching shall extend to 1/8 inch from each side of pocket. g. Press pocket smooth and flat with a heated iron or pressing machine.	301	SSa-1	10-14	A	A
		301	BFt-2	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g	Stitches Per Inch	THREAD Needle	THREAD Bobbin or Looper
6.	Make sleeves.					
	Finished appearance. The sleeves shall be uniform in appearance. The double-lapped and double-stitched seams shall be smooth and flat without gathers, puckers, pleats, or raw edges and shall start and finish evenly. The double row of stitches shall be uniformly 1/4-inch gage with the outer row 1/16 inch from the finished edge. The topsleeve shall be over the undersleeve. The bottom end of the sleeves shall be left unfinished.					
	a. Join the topsleeve to the undersleeve at the forearm and backarm, respectively, with a double-lapped and double-stitched seam.	301 or 401	LSc-2	10-14	A	A
			LSc-2	10-14	A	A
	b. Neatly and evenly pink the raw bottom edge of sleeve 1/8 inch in depth.					
7.	Assemble undercollar and collar interlining.					
	a. The undercollar assembly shall consist of one piece of basic material each for undercollar and collar interlining.					
	b. Mark the breakline of the undercollar interlining with the collar stand marker					
	c. Position the interlining on the undercollar with the top and side edges even and join together at the mark for the breakline; continue to stitch the interlining to the undercollar 1/8 to 3/16 inch from sides and upper edge. In the finished coat, the undercollar stand shall measure 1-1/4 ±1/8 inches at the vertical center.	301	SSa-1	10-14	A	A
8.	Assemble topcollar and undercollar.					
	Finished appearance. The collar shall be uniformly edgestitched and shall finish smooth and flat without puckers, gathers pleats or other distortions. The seam shall finish at the edge of the collar.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
8.	Assemble topcollar and undercollar. (cont'd)					
	a. Position the topcollar and undercollar face to face with center notch matching and the side and top edges even.					
	b. Join topcollar to the undercollar with a 1/4-inch seam, catching the interlining in the stitching.	301	SSe-2 (a)	10-14	A	A
	c. Trim the corners for proper turning. Turn the collar completely, working out the corners and seamed edges.					
	d. Edgestitch the collar uniformly 1/8 inch from the seamed edges. The edgestitching shall begin and end 1/4 to 5/16 inch above the lower edge of undercollar.	301	SSe-2 (a)	10-14	A	A
	e. Press the entire collar smooth and flat with a heated pressing iron or pressing machine, straightening the seamed edges.					
	f. Trim the lower edge of topcollar to approximately 1/4 inch from lower edge of undercollar.					
9.	Fold, stitch and press darts in fronts.					
	Finished appearance. The folded edge of the waist dart shall be towards the back. The folded edge of the underarm dart shall be towards the front.					
	a. Fold the fronts and stitch the waist darts in accordance with the marks as indicated by the pattern, tapering the upper and lower ends of the darts to a point. The points shall be securely tacked or backstitched.	301	OSf-1	10-14	A	A
	b. Fold the fronts and stitch the entire length of the underarm darts in accordance with the mark as indicated in the pattern. The line of stitching shall be 1/4 inch from the notch at the base of armhole, tapering to a point at the lower end of dart.	301	OSf-1	10-14	A	A
	c. Press the darts smooth and flat with a heated pressing iron.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g	Stitches Per Inch	THREAD Needle	THREAD Bobbin or Looper
10.	Seam front interlining to fronts.					
	Finished appearance. The front interlining shall be smoothly seamed to the right and left fronts, respectively, without twists, gathers, puckers or pleats.					
	a. Serge or overedgestitch the back raw edge of the front interlining.	503 or 504		6-10 6-10	A A	A A
	b. Position the front interlining on the inside of the fronts with top and front edges even and seam 1/8 inch from top and front edges.	301	SSa-1	10-14	A	A
11.	Make eyelets.					
	Finished appearance. The eyelets shall be well worked with the purling on the outside of the fronts and shall finish with a 1/8-inch diameter opening.					
	a. Mark the left and right fronts, respectively, in accordance with marks indicated on pattern for the location of two eyelets for removable insignia buttons.					
	b. Make one eyelet at each mark on the fronts through the front interlining.	Eyelet		20 per eyelet (minimum)	A	A
	c. In the finished coat for all sizes, the distance between center of bottom eyelet and bottom edge of coat shall be 8 ±1/4 inches; the distance between center of top and bottom eyelets shall be 4-1/2 ±1/4 inches; the distance from center of eyelets to front edge of coat shall be 5 ±1/4 inches.					
12.	Stitch tape along lapel breakline.					
	a. Position the tape on the front interlining side of the fronts along and to the back of the breakline of the lapel, with front edge of the tape in line with the notch at the gorge.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
12.	Stitch tape along lapel breakline. (cont'd)					
	b. Stitch the tape to the breakline of lapel through all plies 1/16 inch from each finished edge of tape, holding the tape taut and properly distributing the fullness.	301	SSa-1 (each edge)	10-14	A	A
	c. The tape shall extend from gorge notch to approximately 5 inches above the end of lapel.					
	d. Press lapel and front smooth and flat with a heated iron or pressing machine.					
13.	Set breast pocket.					
	Finished appearance. The breast pocket shall be set without twists, gathers, pleats, puckers or raw edges and the gage of stitching shall be uniform.					
	a. Position the breast pocket on the outside of the left front in accordance with marks indicated by pattern. Stitch pocket to the front uniformly 1/8 inch from side and bottom edges, securely tacking the top corners.	301	LSd-1	10-14	A	A
14.	Sew label to facing.					
	Finished appearance. The identification-instruction label shall be positioned so that in the finished coat, it will be midway between the back and front edges of the facing with the bottom edge approximately 6 inches above the bottom edge of the coat.					
	a. Sew the identification-instruction label to the outside of the right facing in a vertical position with a single row of stitches 1/8 inch from each edge of label.	301	SSa-1	10-14	A	A
15.	Make back.					
	Finished appearance. The double-lapped and double-stitched back seam shall be smooth and flat without gathers, puckers, pleats or raw edges and shall start and finish evenly. The double row of stitches shall be uniformly 1/4-inch gage with the outer row 1/16 inch from the					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g	Stitches Per Inch	THREAD Needle	THREAD Bobbin or Looper
15.	Make back. (cont'd)					
	finished edge. The left backpart shall be over the right.					
	a. Join backparts at the center back from top to bottom edge of coat with a double-lapped and double-stitched seam.	301 or 401	LSc-2	10-14	A	A
		401	LSc-2	10-14	A	A
16.	Join front and back at sides.					
	Finished appearance. The double-lapped and double-stitched side seam shall be smooth and flat without gathers, puckers pleats or raw edges and shall start and finish evenly. The double row of stitches shall be uniformly 1/4-inch gage with the outer row 1/16 inch from the finished edge. The backs shall be over the fronts.					
	a. Join back to fronts at the sides with a double-lapped and double-stitched seam.	301 or 401	LSc-2	10-14	A	A
		401	LSc-2	10-14	A	A
17.	Hem bottom edge of coat.					
	a. Hem the raw bottom edge of coat 1/4 inch with the stitching 1/16 to 1/8 inch from folded edge.	301	EFa-1	10-14	A	A
	b. Mark coat 1 inch above folded lower edge for bottom turnup.					
18.	Join facing to fronts.					
	a. Position left and right facings to their respective fronts, with the gorge and front edge even.					
	b. Join facings to fronts 1/4 inch from the top and front edges of the lapel, and the front and bottom edge of the coat. The stitching at bottom shall extend the width of the facing.	301	SSe-2 (a)	10-14	A	A
	c. Trim bottom edge of the facing and corner of lapels and notch the lapel for proper turning.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g	Stitches Per Inch	THREAD Needle	THREAD Bobbin or Looper
19.	Edgestitch coat. Finished appearance. The coat shall be uniformly edgestitched without twists, pleats or puckers. a. Turn the facing to the inside of fronts, working out completely the corners and lapping the facing on the front end of bottom turnup. b. Edgestitch uniformly 1/8 inch from top and front edge of lapels and the front and bottom edge of coat. The stitching at the bottom shall extend the width of facing. Continue to stitch along the back edge of facing the width of the turnup. Turn the bottom of the coat, at the mark for the turnup and continue to stitch the entire hem 1/16 to I/8 inch from the upper hemmed edge of coat.	301	SSe-2 (b) (top and front edges of lapel and front and bottom edge of coat) LSa-1 (back edge of facing) EFb-1 (upper folded edge of bottom turnup)	10-14	A	A
20.	Stitch down facings. a. Stitch the back edge of facing to the fronts from the bottom edge of coat up for a distance of approximately 6 inches and from the shoulder edge down for a distance of approximately 9 inches. The stitching shall not be more than 1/8 inch from the back edge of facing.	301	SSa-1	10-14	A	A
21.	Seam shoulders. Finished appearance. The double-lapped and double-stitched shoulder seam shall be smooth and flat without gathers, puckers, pleats or raw edges and shall start and finish evenly. The double row of stitches shall be uniformly 1/4-inch gage with the outer row 1/16 inch from the finished edge. The backs shall be over the fronts.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g	Stitches Per Inch	THREAD Needle	THREAD Bobbin or Looper
21.	Seam shoulders. (cont'd)					
	a. Join back to fronts at the shoulders with a double-lapped and double-stitched seam, catching the upper raw edge of facing in the stitching.	301 or 401	LSc-2	10-14	A	A
			LSc-2	10-14	A	A
22.	Stitch hanger and size label.					
	Finished appearance. The ends of the coat hanger shall be positioned so that in the finished coat, the hanger opening shall be 1-1/4 ±1/8 inches long when measured along the lower edge of the topcollar.					
	a. Stitch the upper edge of the size label and the ends of the coat hanger to the inside center back of coat at the neck.	301	SSa-1	10-14	A	A
23.	Set collar to coat.					
	Finished appearance. The collar shall be carefully joined to the coat without twists, puckers, pleats or other distortion. The corners of the collar shall be securely tacked across the juncture point of collar and lapel.					
	a. Position the undercollar on outside of coat with the lower corners of the undercollar and lapel notch matching.					
	b. Join the undercollar to the fronts, facings and back, from lapel notch to lapel notch with a 1/4-inch seam.	301	SSa-1	10-14	A	A
	c. Turn under lower edge of top collar from lapel notch to lapel notch, lapping the folded edge on facings, fronts and back along the joining seam. Seam the topcollar to the coat 1/16 inch from folded edge and with the size label and ends of hanger caught in the stitching.	301	LSd-1	10-14	A	A
	d. In the finished coat, the ends of the collar shall be 1-5/8 ±1/8 inches and the top edge of lapels shall be 2-1/4 ±1/8 inches when measured from the tacked corners to the finished edge of collar and lapel, respectively; the collar shall be 1-5/8 ±1/8 inches at center back when collar is turned down					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g	Stitches Per Inch	THREAD Needle	THREAD Bobbin or Looper
23.	Set collar to coat. (cont'd)					
	and measured from creased edge to finished bottom edge.					
24.	Make buttonholes.					
	Finished appearance. The buttonholes shall be clean cut, well made, well worked over gimp to fit a 40-line insignia button. The stitching of the buttonholes shall be securely caught in the basic material. The gimp shall be pulled through to the underside of front. The purling of the buttonholes shall be on the outside. The buttonholes shall be in horizontal alignment with the worked eyelets for the removable insignia buttons. The inside edge of the eyelet-end of the buttonholes shall be 5/8 inch from front edge of coat.					
	a. Mark the left front in accordance with marks on pattern for the location of two buttonholes.					
	b. Make one horizontal, eyelet-end, square-bar type buttonhole, cut 1-1/8 inches long, at each mark.	Buttonhole		54 stitches per buttonhole (minimum not including bartack)	A	A
	c. Securely bartack the end of each buttonhole, catching the buttonhole gimp in the bartacking. Trim the ends of the thread and gimp.	Bartack		21 per bartack (minimum)	A	A
25.	Set sleeves.					
	Finished appearance. The sleeves shall be uniformly set with fullness at the armholes properly distributed. The armhole sleeve seam shall finish smooth and flat without twists, puckers or pleats.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g	Stitches Per Inch	THREAD Needle	THREAD Bobbin or Looper
25.	Set sleeves. (cont'd)					
	a. Position sleeves on outside of coat at the armhole with backarm seam of sleeve matching notch in back and with notch on top sleeve and fronts matching.					
	b. Join sleeves to coat with 3/8-inch seam, catching top end of underarm darts and side seams in the stitching.	301	SSa-1	10-14	A	A
	c. Join sleeve to coat with a second row of stitches 1/8 inch from armhole edge in order that the armhole may be bound with less difficulty.	301	SSa-1	10-14	A	A
26.	Bind the armhole and bartack binding.					
	Finished appearance. The binding shall be uniformly stitched and shall not be tight or full causing puckers, pleats or gathers. The basic material and both edges of binding shall be securely caught in the stitching.					
	a. Bind the raw edge of the armhole with the 1-1/8-inch-wide bias binding, catching the turned under portions of the binding in the stitching 1/16 inch from the inner folded edges and leaving one end free for finishing.	301	BSc-1	10-14	A	A
	b. Lap the free end of the binding on the inside of armhole on the opposite end and secure to the armhole with a 3/8-to 1/2-inch-long bartack. The bartack shall be made on a line with the row of stitches for the binding and shall be stitched through all plies of material at the point of bartacking.	Bartack		26-28 (per bartack)	A	A
27.	Clean coat.					
	a. Trim all ends of stitching and remove all loose ends of thread from the coat. Remove all spots, stains and shade tickets and markings without injury to the material.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
28.	Press coat. a. The coat shall be well pressed throughout with heated pressing irons or pressing machines of a type suitable to obtain the desired shape and appearance in accordance with good manufacturing procedures.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

*3.7 Finished measurements. The finished coat shall conform to the measurements shown in Tables II and III.

Table II Coat measurements 1/

Size	Back length 2/	Sleeve length 3/
	inches.	inches
32	28-1/2	23-1/2
34	28-3/4	23-1/2
36	29	23-1/2
38	29-1/4	23-1/2
40	29-1/2	23-1/2
42	29-3/4	23-1/2
44	30	23-1/2

1/ Tolerance on all measurements: ±1/2 inch.

2/ Back length measurement shall be taken along the center-back seam from lower edge of undercollar to finished bottom edge of coat.

3/ The sleeve length measurement shall be taken along forearm seam from pit of armhole to pinked end of sleeve.

Table III Pocket measurements 1/

	Width 2/		Depth 3/
Size coat	At top edge	At widest dimension	
	inches	inches	inches
32 to 36	4-1/2	5	5-1/2
38 to 44	5	5-1/2	5-3/4

1/ Tolerance: ±1/8 inch.

2/ Width measurements shall be taken at the designated locations from side edge to side edge of finished pocket.

3/ The depth measurement shall be taken at the vertical center from top to bottom edge of the finished pocket.

*3.8 Workmanship. The finished coats shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the levels set by the applicable acceptable quality levels (AQL's).

4. QUALITY ASSURANCE PROVISIONS

*4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

*4.2 Inspection. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

*4.2.1 First article inspection. When first article is required, inspection shall be performed on a completely fabricated coat for conformance to all provisions of this specification.

*4.2.2 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all requirements of referenced specifications, figures and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

*4.2.2.1 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies.

*4.2.3 Examination of end item. The end item shall be examined for defects listed in 4.2.3.2, 4.2.3.3, 4.2.3.4, and 4.2.3.5. The sample unit shall be one coat.

*4.2.3.1 Classification of defects. All defects shall be classified as indicated below, except those with an asterisk (*) in classification column which shall be classified as:

Major - When seriously affecting appearance or serviceability.
Minor A defect- When affecting appearance or serviceability, but not seriously.

*4.2.3.2 General defects. General defects shall be classified as follows:

Examine	Defect	Classification Major (*)	Minor A	Minor B
Buttonholes and eyelets (construction)	a. One or more omitted or added.	X		
	b. Wrong type buttonhole or eyelet.		X	
	c. Buttonhole or eyelet not securely caught on fabric, causing stitching to pull away from fabric.	X		
	d. Length of buttonholes: - less than 1 inch.		X	
	- more than 1-1/8 inches.			X

NOTE: Measurement taken from inside edge of purling to inside edge of bartack.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	e. Bartack omitted or loose on:			
	- 1 buttonhole.	X		
	- both buttonholes.		X	
	f. Bartack misplaced on:			
	- 1 buttonhole.			X
	- both buttonholes.		X	
	g. One or more broken stitches in:			
	- 1 buttonhole.		X	
	- both buttonholes.	X		
	- 1 eyelet.			X
	- 2 or more eyelets.		X	
	h. More than 2 skipped stitches in:			
	- 1 buttonhole.			X
	- both buttonholes.		X	
	- 1 eyelet.			X
	- 2 or more eyelets.		X	
	i. Gimp omitted in 1 or both buttonholes.			X
	j. Ends of gimp not pulled through to the underside of 1 or both buttonholes.			X
	k. Stitches per buttonhole or eyelet (excluding bartack on buttonholes) Less than minimum specified:			
	- 1 or 2 stitches.			X
	- 3 stitches.		X	
	- 4 or more stitches.	X		
	l. Ragged edges, affecting appearance.			X
	m. One or more eyelets not constructed through the reinforcement piece.		X	
	n. Poorly made, affecting appearance (unless otherwise classified).		X	
	o. Constructed with purling on the reverse side.		X	
Cleanness	a. One or more ink spots or stains of an obvious permanent nature.	*		
	b. One or more removable spots or stains clearly noticeable.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	c. Thread ends not trimmed or loose threads or 1 or more shade tickets, if used, not removed throughout coat.			X
	d. Shade markings of an obvious permanent nature exposed on outside of coat (to be scored only when so conspicuously located as to be clearly noticeable).	*		
Component and assembly	Any omitted or defective component or any omitted operation or defect of assembly (unless otherwise or not herein classified).	*		
Cutting	Any component part of basic material not cut in accordance with specification requirements.	X		
Material defects and workmanship damages	a. Any weakening defect, such as smash, multiple float, loose slub, etc., that may develop into a hole.	*		
	b. Shade bar, unsightly slub, etc., on outside, affecting appearance.	*		
	c. Any hole, scissor or knife cut, tear, mend, burn or large exposed drill hole.	X		
	d. Needle chews which may develop into a hole.	*		

NOTE: Material defects and workmanship damages are to be classified as indicated above only when the condition is one which definitely weakens the fabric or when it is so conspicuously located as to be clearly noticeable. Weakening or nonweakening conditions which are inconspicuous and have negligible effect on serviceability are to be classified as follows:

Material defects - no defect
Workmanship damages - Minor B defect

Metal buttons and toggles (when required)	Missing or any part of button assembly defective, not specified type, size or finish.			
	- one button.			X
	- two or more buttons.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	NOTE: Buttons shall be considered defective if they have sharp, rough, cracked, or split edges, unsound soldering, scratches, dents, blemishes, or imbedded foreign matter, loose shank or shell, poorly plated or badly shaded. Toggles shall be considered defective if they have sharp, cracked, or split edges.			
Pressing	a. Burned or scorched.			
	b. Pressing omitted (entire garment).		X	
	c. Poorly pressed (unless otherwise classified).			X
Seams and stitching	a. Accuracy of seaming.			
	1. Seams twisted, puckered or pleated, affecting appearance (unless otherwise classified).		X	
	2. Any part of garment caught in any unrelated operation or stitching.			
	3. Thread breaks or ends of all stitching (when not caught in other seams or stitching) not securely backstitched.		X	
	b. Gage of stitching (edge or raise stitching).			
	1. Irregular, i.e., unevenly gaged or various stitching not uniform, affecting appearance.		X	
	2. Beyond range of width specified or varies more than 1/16 inch when no range is specified.			X
	3. Edge or raise stitching sewn too close to edge, resulting in damage to cloth.			
	c. Open seams.			
	Any seam open: - 1/8 inch to 1/4 inch inclusive. - over 1/4 inch to and including 1 inch. - over 1 inch.	X	X	X

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
NOTE: One or more broken stitches or two or more continuous skipped or run-off stitches constitutes an open seam. A double stitched seam is considered open when either side of the seam is open.				
	d. Raw edges.			
	1. On outside:			
	- 1/8 inch to 1/4 inch inclusive.			X
	- 1/4 inch to and including 1 inch.		X	
	- over 1 inch.	X		
	2. On inside (except free end of binding on armhole):			
	- 1/2 inch to 1 inch inclusive.			X
	- over 1 inch.		X	
NOTE: Raw edges not securely caught in stitching shall be classified as an open seam. Raw edge is classified as such only when it occurs at places where edge is required to be turned under.				
	e. Run-offs			
	1. On joining seams, when resulting in an open seam, score as "Open Seam".			
	2. On raised or top stitching when not resulting in an open seam (outside only)			
	- 1/2 inch to 3/4 inch inclusive.			X
	- over 3/4 inch.		X	
	f. Seam and stitch type.			
	Wrong seam or stitch type.		X	
	g. Stitch tension.			
	1. Loose tension, resulting in a loose seam.	X		
	2. Loose tension on edge or raise stitching resulting in loosely exposed bobbin thread or top thread.		X	
	3. Tight tension (stitches break when normal strain is applied to seam or stitching).	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	NOTE: Puckering is evidence of tight tension. When puckering is evident, the seam shall be tested by exerting normal pull in the lengthwise direction of seam or stitching.			
	h. Stitches per inch.			
	Stitches less than minimum specified (applicable to 10-14 and 12-16 per inch) (except label):			
	- 1 stitch.			X
	- 2 or 3 stitches.		X	
	- more than 3 stitches.	X		
	NOTE: To be scored only when condition exists on major portion of seam.			
	i. Stitches skipped or broken (on edge or raise stitching when seam is seamed, turned and stitched) and top stitching.			
	- more than 1/4 inch but not more than 3/4 inch.			X
	- more than 3/4 inch.		X	
Shaded parts	a. Any outside part badly shaded.			
	b. Parts permitted to be cut from ends badly shaded.			X

*4.2.3.3 Detailed defects applicable to specific parts (outside of coat). Detailed defects applicable to specific parts of outside of coat shall be classified as follows:

Examine	Defect	Classification Major (*)	Minor A	Minor B
Coat fronts	a. Fronts twisted, puckered or bulging, caused by tight or twisted facing or reinforcement pieces, affecting appearance.			
	b. Stitching along back edge of facing through front below shoulder or above bottom edge irregular, not uniformly placed, or different in length on both fronts for more than 1 inch.			X
	c. Stitching along back edge of facing below shoulder extending less than 8 inches or more than 10 inches.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	d. Stitching along back edge of facing above bottom edge extending less than 5 inches or more than 7 inches.			X
	e. Lapel or front edges irregular, affecting appearance.		X	
	f. Bridle tape along breakline: - sewn with a single line of stitching.		X	
	- not uniting reinforcement to body of coat.		X	
	- 1 or both tapes omitted.		X	
	- tape positioned on lapel side.		X	
Length of fronts (when buttons are not used, superimpose the buttonhole eyelets with the center of the eyelets on the right front).	a. Left front shorter than right front at bottom by: - 1/4 inch or more but not more than 1/2 inch.		X	
	- more than 1/2 inch.	X		
	b. Left front longer than right front at bottom by: - 3/8 inch or more but not more than 1/2 inch.			X
	- more than 1/2 inch.		X	
Lapels	a. Length of lapel across top edge less than 2-1/8 inches or more than 2-3/8 inches.		X	
	b. Lapel twisted, puckered or bulging, caused by tight reinforcement piece of coat front, affecting appearance.			
	c. Lapel points uneven by 1/4 inch or more.		X	
	d. Lapel facing tight, causing corners of lapel to curl, affecting appearance.		X	
	e. Lapels poorly shaped or not uniform shape or size, affecting appearance.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
Collar (construction and setting)	a. Not three-ply construction.	X		
	b. Undercollar one-piece construction.		X	
	c. Undercollar and inner ply not single stitched together along breakline.		X	
	d. Ends of collar less than 1-1/2 inches or more than 1-3/4 inches in length.		X	
	e. Top or undercollar short or tight at gorge seam, causing puckering on neckline, lapel or collar, affecting appearance.		X	
	f. Gap between end of collar and top edge of lapel not uniform on both fronts by 1/4 inch or more.			X
	g. Edge not properly forced out, undercollar exposed, affecting appearance, or edge irregular.			X
	h. Collar points poorly shaped or not of uniform shape, affecting appearance.			
	i. Collar points uneven by 1/4 inch or more.		X	
	j. Excessive fullness or twist on top or undercollar, affecting appearance.		X	
	k. Collar off center by more than 1/4 inch at front ends with shoulder seams matched.			X
	l. Top collar tight, causing ends of collar to curl, affecting appearance.		X	
	m. Ends of collar not securely tacked across juncture point of collar and lapel.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	n. Row of stitching forming break-line of undercollar less than 1-1/8 inches or more than 1-3/8 inches from lower edge.			X
	o. Width of collar leaf at center less than 1-1/2 inches or more than 1-3/4 inches.		X	
Patch pocket on left front	a. Width at top edge, at widest part and depth (see Table III) varying from required width or depth dimensions by:			
	- more than 1/8 inch but not more than 1/4 inch.			X
	- more than 1/4 inch.		X	
	b. Poorly shaped or set on crooked, affecting appearance.		X	
	c. Pull or tight, causing pocket or garment to bulge or pucker, affecting appearance.			X
	d. Single ply construction.		X	
	e. Inner ply of pocket not extending to bottom of pocket or above bottom edge of pocket hem.		X	
	f. Hem:			
	1. Not stitched at top or bottom edge.		X	
	2. Stitching at top or bottom edges of hem extending beyond, or not extending to within 1/8 inch of pocket edges.			X
	3. Less than 7/8 inch but not less than 3/4 inch or more than 1-1/8 inches but not more than 1-1/4 inches wide.			X
	4. Less than 3/4 inch or more than 1-1/4 inches wide.		X	
	5. Raw (inner) edge not turned under.		X	
	6. Top corners not securely tacked.		X	
	7. Finished hem made on the reverse side, i.e., positioned outside of pocket.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
Underarm and waist darts	a. Ends of dart(s) not properly tapered, causing an unsightly bulge.			X
	b. One or more pointed ends of darts not securely tacked or backstitched.		X	
	c. One or more darts omitted.		X	
	d. Folded edge of underarm dart not pressed towards the front.			X
	e. Folded edge of waist dart not pressed towards the back.			X
Shoulder seam	Front panel lapping over back.		X	
Sleeves	a. Sleeve seams lapped with underarm sleeve on top sleeve.		X	
	b. Bottom edge on 1 or both sleeves not pinked.		X	
	c. Pinking on bottom edge of sleeve less than 1/8 inch in depth.			X
	d. Bartack - one omitted. - two omitted.			X X
Armhole	a. Back and front body parts not finishing over the sleeve.		X	
	b. Back, front or sleeve puckered or pleated, affecting appearance.		X	
	c. Armhole badly stretched, affecting appearance.		X	
Back seam	Right back lapping over left back.			X
Side seams	Fronts lapping over back at side seams.		X	
Buttonholes on left front (position)	a. Inside edge of buttonhole eyelet less than 1/2 inch or more than 3/4 inch from front edge.			X
	b. Buttonholes constructed on the right front.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
Eyelets in right and left fronts (position)	a. Center of eyelet less than 4-3/4 inches or more than 5-1/4 inches from front edge.		X	
	b. Center of bottom eyelet less than 7-3/4 inches or more than 8-1/4 inches from bottom edge.		X	
	c. Distance between center of top and bottom eyelet less than 4-1/4 inches or more than 4-3/4 inches apart.		X	
	d. Out of horizontal alignment with buttonholes by more than 1/4 inch.		X	
	e. Out of vertical alignment by 1/4 inch or more.		X	

*4.2.3.4 Detailed defects applicable to specific parts (inside of coat). Detailed defects applicable to specific parts of inside of coat shall be classified as follows:

Examine	Defect	Classification Major (*)	Minor A	Minor B
Facings	a. Top end of facing not caught in shoulder seam.		X	
	b. Back edge of facing not on selvage.		X	
	c. Facings unequal in width by more than 3/4 inch.			X
	d. Back edge of facing not lapped on front end of bottom turnup.			X
Reinforcements	a. Not extending to top and front edges of coats.		X	
	b. Not stitched to fronts prior to seaming facings to front edges of coat.		X	
	c. One or both omitted.	X		
	d. Extending beyond inner edge of facing.			X
	e. Serging or overedge stitching omitted.		X	
Hanger	a. Missing.		X	
	b. Not centered to center back seam by more than 1 inch.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	c. Width less than 3/16 inch.			X
	d. Hanger opening between ends along lower edge of topcollar less than 1-7/8 inches or more than 2-1/8 inches.			X
	e. Ends not securely caught in the seaming of topcollar to neckline of coat.		X	
Armhole seam binding	a. Armhole seam edges (sleeve and body) not securely caught in binding.		X	
	b. Tight or full, causing puckers, gathers or pleats, not affecting smoothness outside of armhole.			X
	c. One or both edges of binding not securely caught in the stitching.		X	
	d. Binding around one or both armholes omitted.	X		
	e. Free end not lapped on the outside of opposite end or not securely stitched to the armhole seam.		X	
Bottom hem	a. Width less than 7/8 inch or more than 1-1/8 inches wide.			X
	b. Twisted or puckered, affecting smoothness on outside of coat.		X	
	c. Varying in width by 1/4 inch or more.			X
Identification-instruction label (combined)	a. Missing, incorrect or illegible.		X	
	b. Not positioned vertically at bottom midway between front and back edges of right facing.			X
	c. Bottom edge of label positioned more than 7 inches above bottom edge of coat.			X
	d. Not stitched on four sides.			X

Source: https://assist.dla.mil - Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
Size label	a. Missing, incorrect, illegible or not securely caught in stitching of topcollar to neckline of coat.		X	
	b. Size shown on item label not in accordance with size shown on intermediate or outer containers, as applicable.			X

*4.2.3.5 Finished measurements. Any measurement deviating from the nominal dimensions and tolerance specified in Table II shall be classified as a size measurement defect. Sleeve lengths uneven by 1/2 inch or more shall be classified as a size measurement defect.

*4.2.3.6 Inspection levels and AQL's. Inspection levels and AQL's expressed in defects per 100 units (DHU) shall be as follows:

4.2.3.2 through 4.2.3.4

Inspection Level III of MIL-STD-105

AQL's	Major	1.5 DHU
	Major and Minor A (combined)	10.0 DHU
	Total Major, Minor A and Minor B (combined)	40.0 DHU

4.2.3.5

Inspection Level S-3 of MIL-STD-105

One class	4.0 DHU

*4.2.4 Examination of preparation for delivery requirements. An examination shall be made to determine compliance with packaging, packing and marking requirements of Section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packaged, selected just prior to closing operation. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the inspection lot. The inspection lot shall be S-2 and the AQL shall be 2.5 DHU.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; or improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

Workmanship	Inadequate application of components such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Content	Number of coats per shipping container is more or less than required.

5. PREPARATION FOR DELIVERY

5.1 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.1.1 Level A.

*5.1.1.1 Method 1. Thirty-five (35) coats of one size only shall be neatly folded and packed in a fiberboard shipping container with liner conforming to class weather resistant, grade V2s, size 3A, of MIL-B-17757. In addition, each container shall have the contents completely covered on top and bottom with a sheet of 60-pound minimum basis-weight kraft paper conforming to grade B of UU-P-268. Each shipping container shall be assembled, closed and reinforced as specified in the appendix to the box specification. Towards the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

*5.1.1.2 Method 2. When specified (see 6.2), three level B shipping containers (105 coats of one size only) shall be overpacked in a fiberboard shipping container conforming to class weather resistant, size 4, of MIL-B-17757 reinforced as specified in the appendix to the box specification. Towards the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

*5.1.2 Level B. Thirty-five (35) coats of one size only shall be neatly folded and packed in a fiberboard shipping container with liner conforming to class domestic, size 3A, of MIL-B-17757. In addition, each container shall have the contents completely covered on top and bottom with a sheet of 60-pound minimum basis-weight kraft paper conforming to grade B of UU-P-268. Each shipping container shall be assembled and closed as specified in the appendix to the box specification. Towards the end of the contract or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

*5.1.3 Level C. Coats shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

*5.2 Marking. In addition to any special marking required by the contract or order, the shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

*5.2.1 Labels. Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label with the words "MIXED SIZES" plainly stamped or printed thereon, and under these words shall be legibly printed the correct quantity and sizes contained therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

6. NOTES

*6.1 Intended use. The coat described herein is intended for wear by male personnel of the U. S. Marine Corps assigned to steward's duty.

*6.2 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

*6.2.1 Procurement requirements.

(a) Title, number, and date of this specification.
(b) Size required (see 1.2).
(c) Whether first article is required (see 3.2).
(d) Number of coats in first article (see 3.2).
(e) Whether insignia buttons are required (see 3.3.6.1).
(f) Selection of applicable levels of packing (see 5.1).
(g) When level A, method 2, packing is required (see 5.1.1.2)

*6.2.2 Contract data requirements. Data conforming to Data Item Descriptions DI-R-4803, DI-R-4805, DI-T-4901, DI-T-4902, DI-T-4903 and DI-T-4904 will usually be required for delivery in connection with this specification. When so required, such data will be specified for delivery on a DD Form 1423 included in the contract.

*6.3 Samples and shade samples. For information regarding the availability of sample coat, and of standard shade specified, address inquiry to the procuring activity issuing the invitation for bids.

*6.4 First article. Examination, test and approval shall be as specified by the contracting officer (see 3.2).

*6.5 Marginal notations. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Preparing activity:
Navy - MC
Project No. 8405-H470

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.


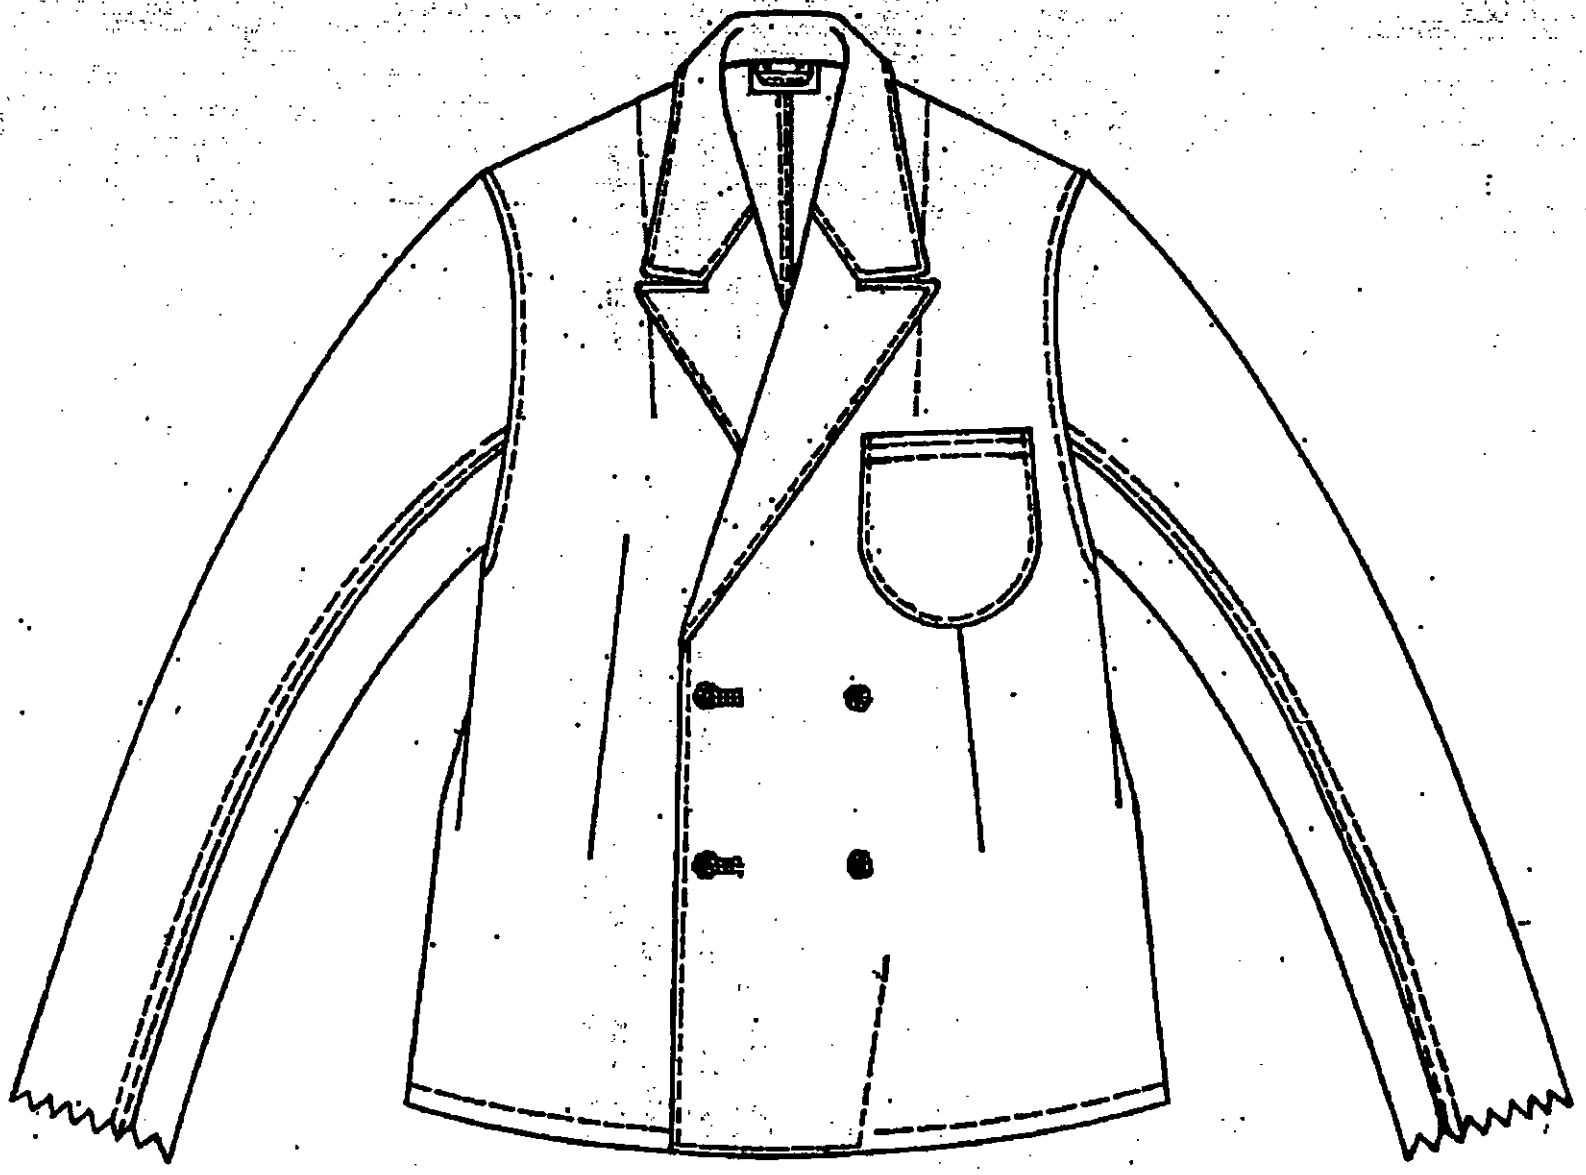


FIGURE 1. COAT, FOOD HANDLER'S: COTTON/POLYESTER TWILL; WHITE; WITH POCKET

M.C.S.A. 826: R.G.F. 28 Jul 71

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

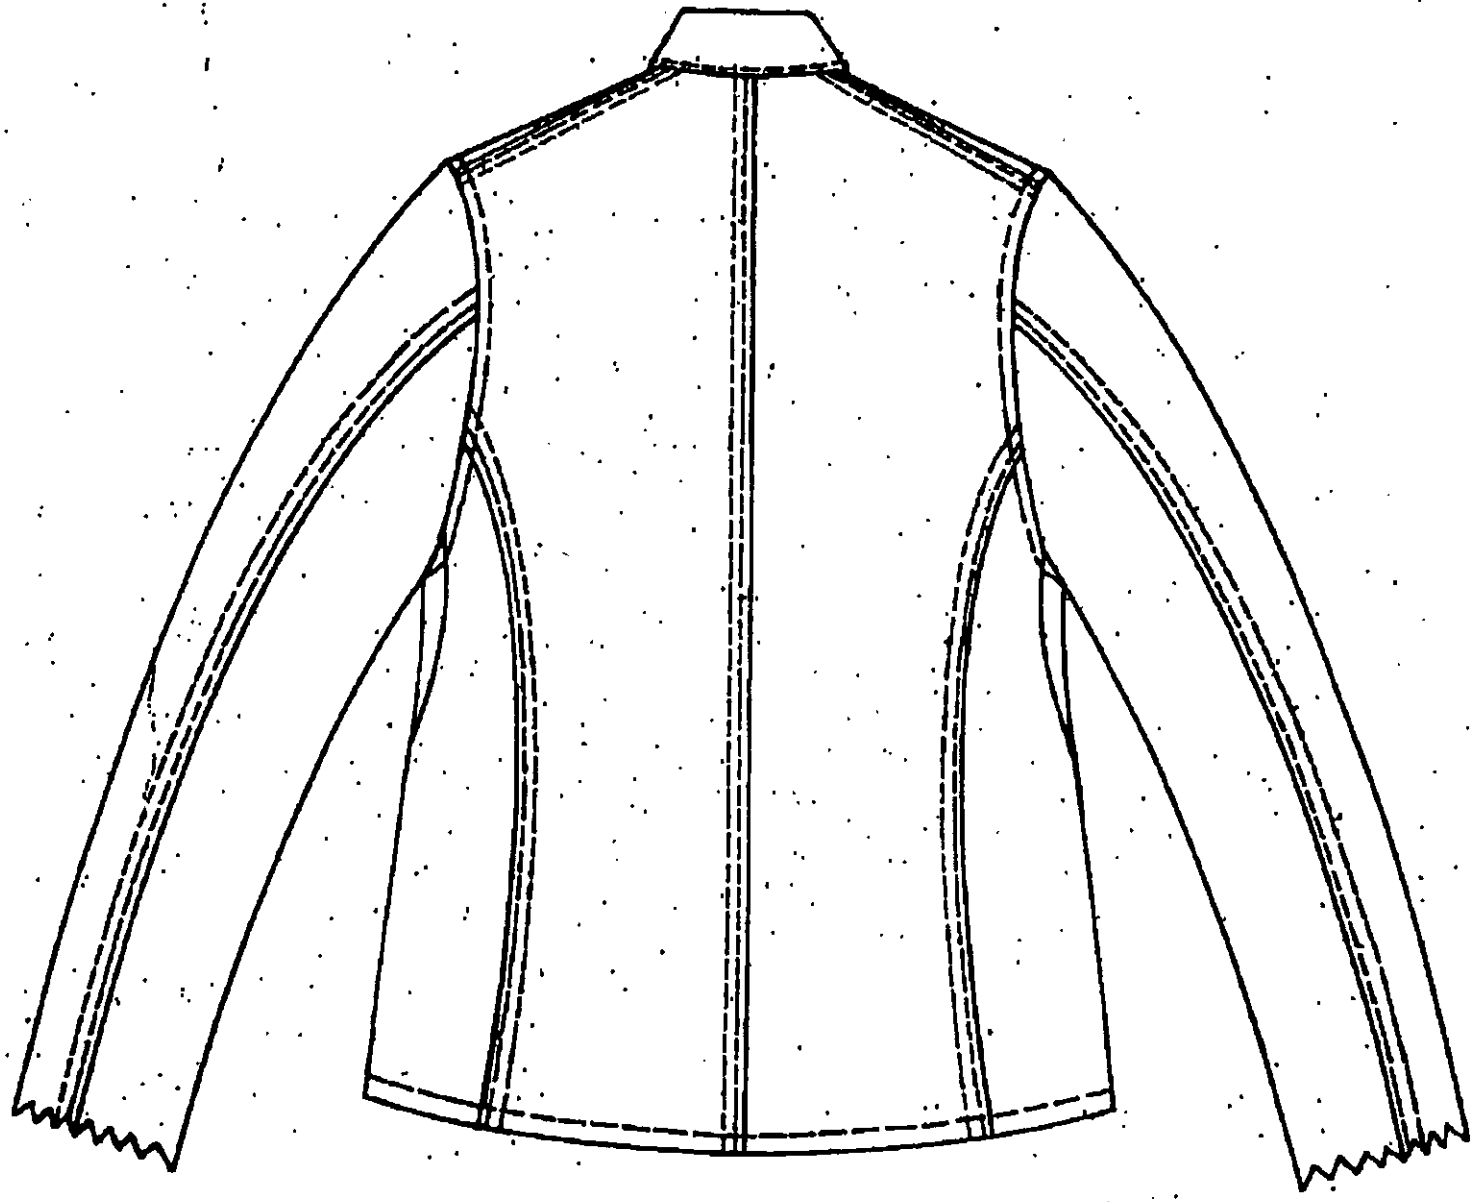

MIL-C-19479B(MC)

FIGURE 2. COAT, FOOD HANDLER'S: COTTON/POLYESTER TWILL; WHITE; WITH POCKET

M.C.S.A.
826: R.G.F.
28 Jul '71

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.

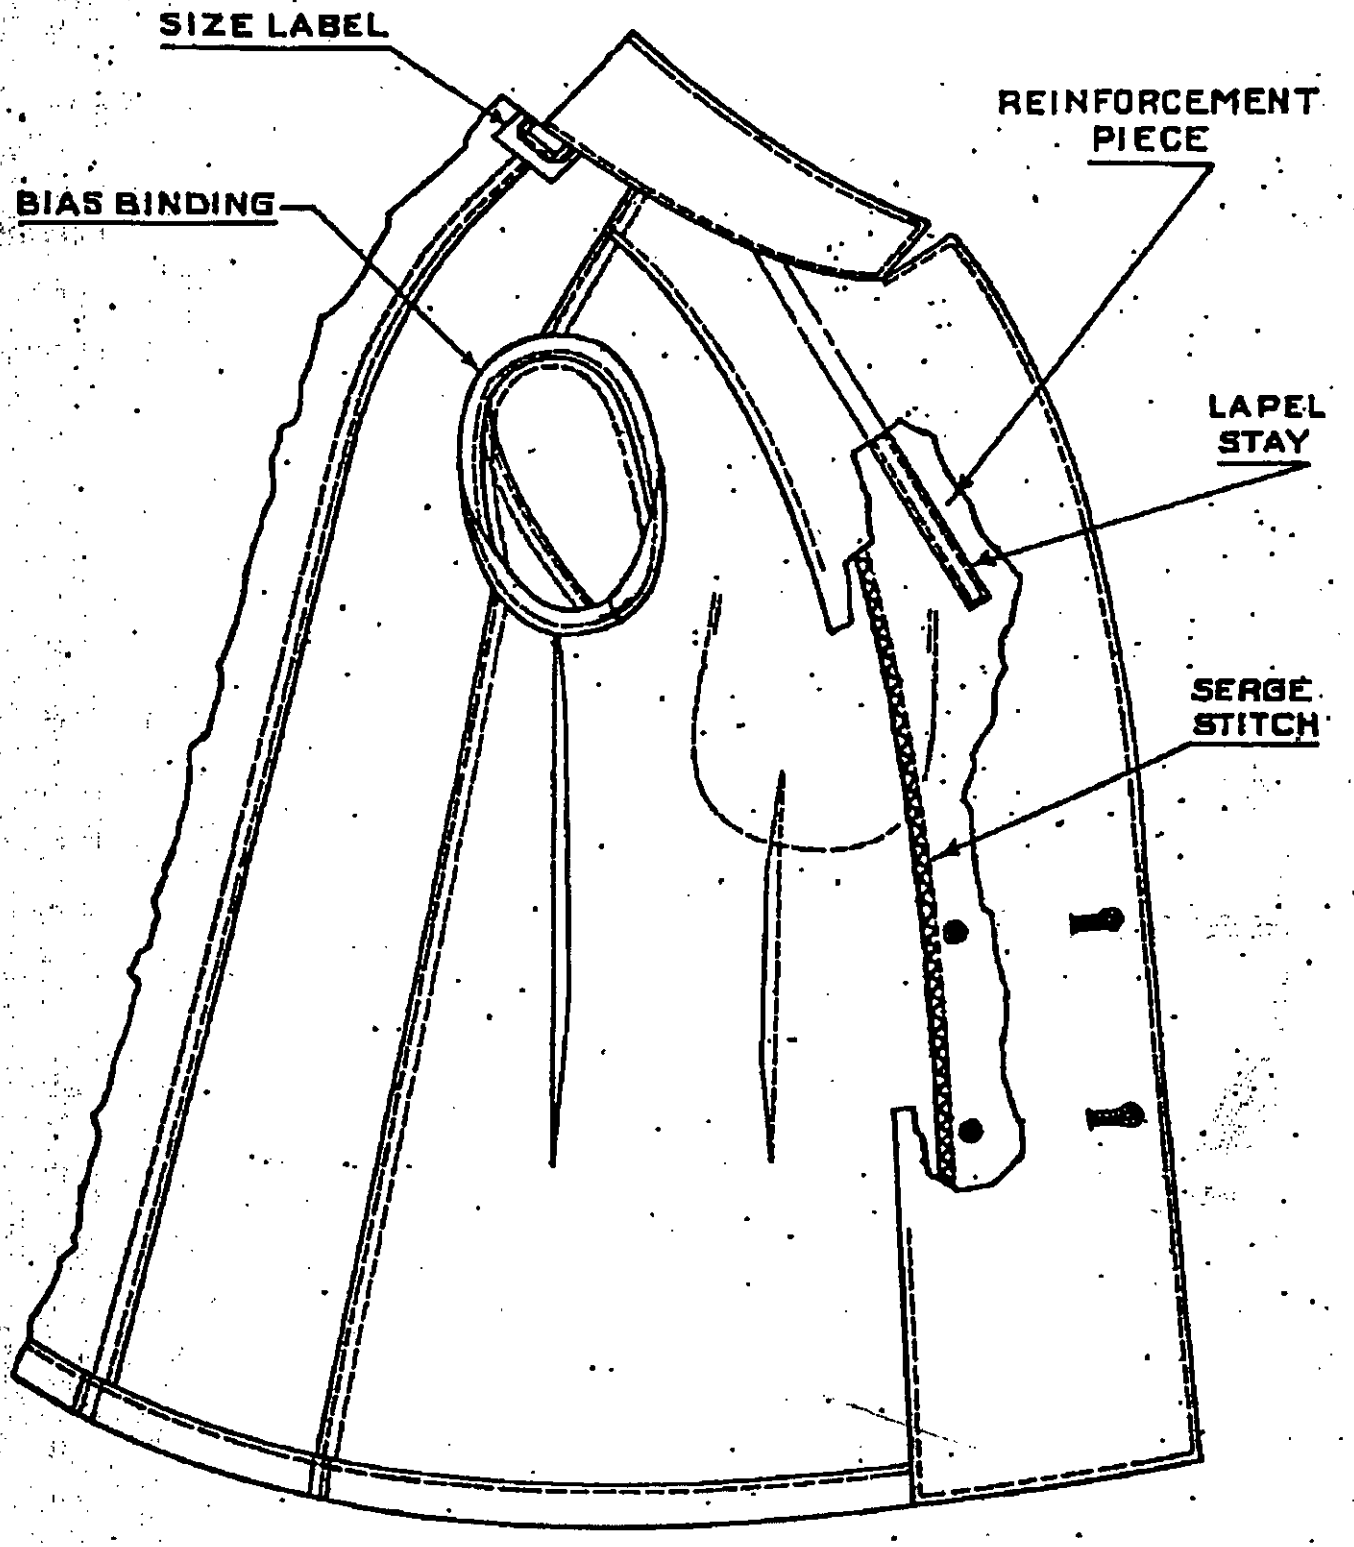


FIGURE 3. COAT, FOOD HANDLER'S: COTTON/POLYESTER TWILL; WHITE; WITH POCKET

M.C.S.A. 826: R.G.F. 28 Jul '71

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:54Z
Check the source to verify that this is the current version before use.