MIL-G-19465E(NU)
21 July 1980
SUPERSEDING
MIL-G-19465D(SA)
31 January 1974

MILITARY SPECIFICATION

GLOVE, CHIPPER'S, GAUNTLET

This specification is approved for use by Navy Clothing and Textile Research Facility, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for one type of leather work glove.

1.2 Classification. The glove shall be procured by the following sizes for either the left or right hand as specified (see 6.2):

Small	Medium	Large	Extra-Large

2. APPLICABLE DOCUMENTS

2.1 Issue of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton
KK-L-2004	- Leather, Cattlehide, Deerskin and Horsehide, Chrome Tanned
CCC-C-419	- Cloth, Duck, Cotton, Unbleached, Plied - Yarns Army and Numbered
DDD-L-20	- Label; for Clothing, Equipage, and Tentage (General Use)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 202640-18T12:53Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-B-17757 - Boxes, Shipping Fiberboard, (Modular Sizes)

STANDARDS

FEDERAL

FED-STD-191 - Textile Test Methods
FED-STD-311 - Leather, Methods of Sampling and Testing
FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

(Copies of specifications, standards, drawings, and publications required by contractor in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

LAWS AND REGULATIONS

U.S. Postal Service Manual

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20406)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Association, Traffic Department, 1616 P Street, N.W., Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

Source: https://assist.dla.mil -- Downloaded: 202640-18T12:53Z
Check the source to verify that this is the current version before use.

U.S. DEPARTMENT OF AGRICULTURE

Methods of Test for Grade of Wool

(Application for copies should be addressed to the U.S. Department of Agriculture, Agricultural Marketing Service, Washington, D.C. 20402.)

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample, in which case this specification shall govern.

* 3.2 First article. When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3).

3.3 Materials.

3.3.1 Leather. The leather used in the fabrication of the glove, shall conform to the requirements specified in 3.3.1.1 and 3.3.1.2.

* 3.3.1.1 Hand section. The leather used for the entire hand section of glove, palm and back side, reinforcement patches, and welts (thumb, finger tips, and finger base), shall be cattlehide conforming to type V of KK-L-2004. The thickness of each leather component part shall be not less than 2 1/2 ounces nor more than 3 1/2 ounces. The color of each leather component part shall be of a cream or light gray shade. All leather component parts shall be of the same color.

* 3.3.1.2 Gauntlet section. The leather used for the gauntlet, front and back side of glove, shall be cattlehide conforming to type VIII of KK-L-2004. The thickness of each piece shall be not less than 2 1/2 ounces nor more than 3 1/2 ounces. The color of each piece shall be of a light gray shade. As an alternate, the gauntlet may be one full piece or the back of hand and back of gauntlet may be made of one piece of leather as specified in 3.3.1.1.

* 3.3.2 Gauntlet lining Leather gauntlet piece shall be lined with an unbleached cotton duck conforming to the requirements for type I, number 8, hard textured duck of CCC-C-419, or a gauntlet lining fabric composed of two thicknesses of unbleached cotton fabric securely laminated together. The laminated fabric shall be composed of a cotton twill face fabric weighing not less than 3.7 ounces per square yard and a plain weave cotton backing fabric weighing not less than 1.7 ounches per square yard. The finished fabric (laminated) shall contain not less than 14 ounces per square yard of natural rubber, synthetic rubber, or synthetic resin, and weigh not less than 19.4 ounces per square yard (see 4.4.1). The gauntlet lining may be one piece or two pieces.

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:53Z
Check the source to verify that this is the current version before use.

* 3.3.3 Hand liner. The glove shall have a wool-cotton knitted fabric. The yarn for the fabric face shall be 98.0 percent wool of a grade not lower than U.S. Standard 50's (see 4.4.1). The fibers may be from fleece, pulled sheep, or any combination thereof. The use of reprocessed, revised or waste wool is prohibited. The cotton backing yarn shall be no more than 30.0 percent of the finished fabric weight. The scoured fabric shall comply to the requirements specified in table I.

Table I - Physical requirements

Characteristic	Requirement	
	Minimum	Maximum
Wales per inch	17	20
Courses per inch	17	-
Weight, ounces per square yard	9	11

3.3.4 Thread. The thread for seaming and stitching the glove shall be cotton, conforming to type 1A1, 4-ply, ticket numbers 16 and 20, of V-T-276.

* 3.3.5 Label - Each glove shall be marked with a combination identification and size label conforming to type III or IV, class 4 of DDD-L-20, except that the label shall bear the following inscription and shall show fastness to laundering only:

GLOVE, LEATHER, GAUNTLET, CHIPPER
CONTRACT NO: DLA-000-00-0-0000 (EXAMPLE)
STOCK NO: 8415-00-000-0000 (EXAMPLE)
SIZE: RH - LARGE (EXAMPLE)
NAME OF CONTRACTOR:
U.S. PROPERTY

* 3.4 Design. The glove shall be a slip-on style, Gunn-cut; consisting of a gauntlet with fabric lining, a continuous thumb with a leather welt inserted in the seam, a finger base flap welt positioned at base of second and third finger fronts on palm-side of glove, leather welts at finger tips, a reinforcement patch on palm-side of gauntlet to palm-seam and on back side of glove, and a knitted liner positioned on inside back of glove from wrist edge to base of fingers.

3.4.1 Figure. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:53Z
Check the source to verify that this is the current version before use.

3.5 Dies and patterns. The dies and patterns for cutting all parts of the glove shall be furnished by the contractor, and shall be of the proper proportions to provide a good fitting glove conforming to finished measurements in table III.

3.6 Construction.

3.6.1 Stitches, seams, and stitchings. The stitch, seam, and stitching types specified in table II shall conform to FED-STD-751. Where stitch type 401 is used, the chain effect or looper (underthread) shall be on the inside of the glove.

3.6.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table II.

3.6.3 Thread breaks and ends of seams. Ends of all seams and stitching produced with 301 stitch type, when not caught in other seams or stitching, shall be backtacked not less than 1/2 inch. Both ends of all seams and stitching produced with 401 stitch type, when not caught in other seams or stitching, shall have a 1/2 to 3/4 inch chain extending beyond each end. Thread breaks (all stitch types) shall be secured by stitching on each side of break not less than 1/2 inch. Skipped stitches or thread breaks (401 stitch type) may be repaired using 301 stitch type.

3.7 Manufacturing operations requirements. The glove shall be made in accordance with operations listed in table II. The contractor is not required to follow the exact sequence of operations shown provided that the finished glove is identical to that produced by following the sequence of operations listed in table II.

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:53Z
Check the source to verify that this is the currentversion before use.

Table II - Construction of glove

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting a. Before cutting the leather components of the glove, the skins shall be dampended and all the stretch in the lengthwise direction pulled out. Each leather component shall be cut in the lengthwise directions as follows: 1. Cut the face of thumb, palm, fourth (little) finger, and the entire first (index) finger from one piece of leather. Two plies of this leather shall be used in the fabrication of the glove. 2. Cut the second and third finger fronts on palm side from one piece of leather. Two plies of this leather shall be used in the fabrication of the glove. 3. Cut the back of thumb from one piece of leather. 4. Cut the back of glove from one or two pieces of leather. If one piece, it shall include the backs of the second, third, and fourth fingers and back of gauntlet. If of two pieces, the gauntlet shall be cut from a separate piece of leather. 5. Cut the reinforcement patch for the back of glove to the sufficient length and width to conform to operation 3.a.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:53Z
Check the source to verify that this is the current version before use.

Table II - Construction of glove (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting (Cont'd) 6. Cut the finger base flap reinforcement welt for the seam at base of second and third finger fronts on palm-side, not more than 3/4 inch in width and of sufficient length to conform to operation 4.c. 7. Cut the thumb welt reinforcement piece to the sufficient length and width to conform to operation 5. 8. Cut the palm reinforcement patch to the sufficient length and width to conform to operation 11.b. 9. Cut the four (4) fingertip flap reinforcement welts on palm side not more than 5/8 inch wide and of sufficient length to conform to operation 12.b. b. Cut the gauntlet lining pieces to the sufficient length and width to conform to operation 7.b.					
2.	Replacement of defective components During the cutting and manufacturing process, components having material defects or damages that are classified as defects in Section 4, shall be removed from production and replaced with non-defective and properly matched components.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:53Z
Check the source to verify that this is the current version before use.

Table II - Construction of glove (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
3.	Attach reinforcement patch and knitted liner to back hand portion of glove a. Position flesh side of reinforcement patch horizontally across grain side of leather on back hand portion of glove, with edge of its width even along the thumb side, extending to within 3/4 inch of closing seam, within 3/4 inch of the crotch between the second and third fingers, and to within 1 inch of the wrist edge. b. Position knitted liner with the cotton back against the flesh side of leather on back hand portion of gloves, the side edges and wrist edge even, extending to within 1/2 inch of the crotch between the second and third fingers. c. Unite reinforcement patch, back hand portion of glove, and knitted liner with a double row of stitching 1/8 to 3/16 inch gage along the top, bottom, and side of reinforcement patch nearest to the fourth (little) finger.	301 or 401	LSa-2	7-10	16/4 16/4	16/4 20/4
4.	Attach finger base flap reinforcement welt and palm side of glove to second and third finger fronts a. Superimpose the two plies of leather for the second and third finger fronts evenly together, flesh side of one ply to grain side of the other ply. b. Superimpose the two plies of leather for the palm side of glove evenly together, flesh side of one ply to gain side of the other ply, and overlap the second and third finger fronts 3/8 to 1/2 inch.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026/10-18T12:53Z
Check the source to verify that this is the current version before use.

Table II - Construction of glove (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
4.	Attach finger base flap reinforcement welt and palm side of glove to second and third finger fronts (cont'd)					
	c. Superimpose finger base flap reinforcement welt evenly along base of second and third finger fronts, grain side to grain side, and double stitch the components together 1/16 to 1/8 inch gage. The contacting corners of the finger base flap reinforcement welt shall be caught in the seaming of the first (index) finger and fourth (little) finger when glove is closed in operation 12.a NOTE: Welt may be prestitched to palm	301	LSa-2	7-10	16/4	16/4
5.	Join thumb to palm inseam					
	a. Superimpose back of thumb piece to palm and around the face of thumb, grain side to grain side, with a thumb welt reinforcement piece positioned in between the components.					
	b. Stitch the components together in one continuous operation, wrist edge to wrist edge.	301 or 401	SSj-1	7-10	16/4 16/4	16/4 20/4
	OR					
	c. The thumb welt reinforcement piece may be prestitched prior to joining thumb pieces.	301 Or 401	SSa-1	7-10	16/4 16/4	16/4 20/4
	d. Turn the thumb to its finished position. The thumb welt reinforcement piece shall be grain side up. and shall not protrude more than 1/8 inch from thumb seam.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:53Z
Check the source to verify that this is the current version before use.

Table II - Construction of glove (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
6.	First (index) finger and thumb side closings a. Fold the first (index) finger back and overlap the palm over the back hand portion of glove, flesh side to grain side 1/2 (± 1/8) inch.					
	b. Stitch the first (index) finger and back hand portion of glove from bottom of first (index) finger to wrist edge with a double row of stitching, 1/8 to 3/16 inch.	301 or 401	LSa-2	7-10	16/4 16/4	16/4 20/4
7.	Assemble gauntlet a. Overlap the two leather gauntlet pieces 1/2 (± 1/8) inch.					
	b. Overlap the two separate pieces of cotton duck or laminated fabric lining 1/2 (± 1/8) inch, and position over the lapped leather gauntlet pieces with the side edges and bottom edge even, extending to within 3/8 inch of the top edge.					
	c. Double stitch the leather gauntlet pieces and lining pieces at center, 1/16 to 1/8 inch gage.	301 or 401	LSa-2	7-10	16/4 16/4	16/4 20/4
8.	Labeling The identification marking shall be applied on the lining of back of gauntlet piece, centered and positioned that the distance between the bottom edge of the last line and top opening is approximately one inch.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:53Z
Check the source to verify that this is the current version before use.

Table II - Construction of glove (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
9.	Hem gauntlet The top edge of gauntlet shall be turned in 1/2 to 5/8 inch, and single needle stitched 1/16 to 1/8 inch from raw edge.	301	EFa-1	7-10	16/4	16/4
10.	Join gauntlet to palm a. Position hand portion of glove and palm reinforcement patch in 1/4 to 3/8 inch between the gauntlet lining and leather gauntlet at wrist edge. The reinforcement patch shall be face to face with palm portion of glove.					
	b. Double stitch the components across the wrist edge, 1/8 to 3/16 inch gage	301 or 401		7-10	16/4 16/4	16/4 20/4
11.	Attach palm reinforcement patch at wrist a. Turn reinforcement patch over the gauntlet with a double row of stitching around the sides and bottom edge of patch, 1/8 to 3/16 inch gage.	301 or 401	LSa-2	7-10	16/4 16/4	16/4 20/4
	b. The reinforcement patch, when finished, shall extend to within 1 inch of the sides of gauntlet and extending down from the gauntlet not less than 1 1/2 inches.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:53Z
Check the source to verify that this is the current version before use.

Table II - Construction of glove (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
12.	Closing a. Close the side of glove nearest to the fourth (little) finger and around the fingers, simultaneously catching the flesh side of the fingertip flap reinforcement welts around the tips of the fingers. NOTE: Fingertip flap reinforcement welts may be pre stitched or attached after closing glove to palm side of glove. b. The fingertip flap reinforcement welt, when finished, shall extend from the tip of the finger down each finger seam not less than 1 1/4 inches.	301	SSa-1	7-10	16/4	16/4
13.	Trimming and cleaning Trim thread ends. Remove all spots and stains.					
14.	Finishing The glove shall be neatly laid-off on a heated form.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:53Z
Check the source to verify that this is the current version before use.

3.8 Measurements. The finished glove shall conform to the measurements as shown in table III. All measurements and tolerances are expressed in inches.

Table III - Finished measurements

Glove Size	A	B	C	D	E	F	G
Small	12 3/4	7 3/4	4 1/2	4 3/4	2 3/4	4 3/4	6 1/4
Medium	13	8	5	5	3	5	6 3/4
Large	13 1/2	8 1/2	5 1/2	5 1/4	3 1/4	5 1/2	7
Extra Large	14	8 3/4	5 3/4	5 1/2	3 1/2	6	7 1/4
Tolerances	± 1/2	± 1/4	± 1/8	± 1/8	± 1/8	± 1/4	± 1/4

Measurements on the finished glove shall be taken as follows (see figure 1):

A. Top edge of gauntlet cuff to seam tip of second finger.
B. Bottom edge of gauntlet cuff to seam tip of second finger.
C. Across palm at thumb crotch, folded edge to seam.
D. Seam tip of first (index) finger to thumb crotch.
E. Thumb crotch to seam tip of thumb.
F. Across bottom edge of gauntlet.
G. Across top edge of gauntlet.

3.9 Workmanship. The finished glove shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

* 4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:
1. First Article Inspection (See 4.3)
2. Quality conformance (See 4.4)

Source: https://assist.dla.mil -- Downloaded: 202640-18T12:53Z
Check the source to verify that this is the currentversion before use.

4.3 First article inspection. When required, the first article submitted in accordance with 3.2 shall be inspected for compliance with design, construction, workmanship, appearance, and dimensional requirements.

4.4 Quality conformance inspection. Inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated herein.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. A certificate of compliance shall be submitted for the type of wool used (see 3.3.3). In addition, components and materials listed in table IV shall be tested for the characteristics specified and in accordance with the referenced test methods of FED-STD-191. Testing for all the requirements listed in table IV is applicable to the sample unit. For the gauntlet laminated fabric, the lot size shall be expressed in units of yards and the sample unit shall be 1/2 yard, full width. For the knitted liner fabric, the lot size shall be expressed in units of pounds and the sample unit shall be 1/2 yard, full width. The sample size shall be as follows:

Lot size	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

The lot shall be unacceptable if one or more units fail to meet any requirements specified.

Table IV - Component testing

Component	Characteristic	Requirement paragraph	Test Method
Gauntlet laminated fabric	Material identification of face and backing fabric	3.3.2	1200
	Weight (oz. per sq. yd.) of face and backing fabric	3.3.2	5041
	Weave on face and backing fabric	3.3.2	Visual 1/
	Finished fabric, weight of rubber	3.3.2	5041
	Finished fabric, total weight (oz. per sq. yd.)	3.3.2	5041

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:53Z
Check the source to verify that this is the currenversion before use.

Table IV - Component testing (Cont'd)

Component	Characteristic	Requirement paragraph	Test Method
Knitted liner fabric	Material identification of face yarn	3.3.3	1100
	Wool grade (scoured wool)	3.3.3	4.4.1.1
	Wool grade (top)	3.3.3	4.4.1.2
	Material identification of backing yarn	3.3.3	1200
	Percentage of cotton in fabric	3.3.3	2100
	Finished weight	3.3.3	5040
	Wales and Courses per inch	3.3.3	5070

1/ One determination shall be performed per sample unit and the results reported as "pass" or "fail".

4.4.1.1 Wool grade (scoured wool). The wool when furnished in scoured form, shall be visually examined for grade prior to picking, carding, and dyeing by comparison with the applicable U.S. Standard (see 2.2). In the event of a dispute, the wool grade shall be determined by width method (wedge) approved by the Government. The examination for grade shall be performed on a composite sample of 1 pound for each 10,000 pounds or fraction thereof in the lot. The lot shall be unacceptable if the sample does not conform to the required grade specified in 3.3.3.

4.4.1.2 Wool grade (top form). The wool when furnished in top form, shall be visually examined for grade by comparison with the applicable U.S. Standard (see 2.2). In the event of a dispute, the wool grade shall be determined by a width method (wedge) approved by the Government. The sample unit shall be one (1) yard of undyed top. The lot size shall be expressed in units of 1 pound. The sample size shall be in accordance with 4.3.1, and the lot shall be unacceptable if one or more units fail to meet the required grade specified in 3.3.3.

4.4.2 Examination of the end item. The defects found during the examination of the end item shall be classified in accordance with 4.4.2.1 and 4.4.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.4.2.3. The lot size shall be expressed in units of one glove. The sample unit for this examination shall be one glove.

4.4.2.1 Visual examination.

Source: https://assist.dla.mil -- Downloaded: 202640-18T12:53Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Material (Leather)	Not type of leather specified	X	
	Not full grain (where specified)	X	
	Not split leather (where specified)	X	
	Not soft and pliable		X
	Any hole (except needle hole or pinhole), cut, tear or tip	X	
	Grain damage(s) or imperfection(s) e.g., grub or tick marks, scratch, scar, or abrasions:		
	-Seriously affecting serviceability	X	
	-Affecting serviceability, but not seriously		X
	Loose, spongy, or flanky:		
	-Seriously affecting serviceability	X	
	-Affecting serviceability, but not seriously		X
	Brittle or bony area; thin or weak area:		
	-Seriously affecting serviceability	X	
	-Affecting serviceability, but not seriously		
	Three or more needle holes or pinholes		X
	Wrinkles:		
	-Seriously affecting serviceability	X	
	-Affecting serviceability, but not seriously		X
(Gauntlet Lining)	Not type specified	X	
	Any hole, cut, or tear	X	
	Floats, loose ends, smashes, or slubs		X
	Any broken or missing pick or end		X
	Any mend in fabric (except restitching of seams)		X
(Knitted liner)	Not type specified	X	
	Any hole, cut, or tear	X	
Color	Not as specified		X
	Color not uniform or shaded parts clearly noticeable		X
	All leather components in hand portion of glove not of same color		X
Cleanness	Any spot or stain		X
	Thread ends - on outside:		
	1. More than one but not more than three trimmed to less than 1/2 inch		X
	2. More than three not trimmed to less than 1/2 inch	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:53Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Cutting	Any component part not cut in accordance with specification requirements	X	
Components	Any component part misplaced or not serving intended purposes		X
	Any component part not securely affixed, e.g., reinforcement patch on back side of glove loosely attached	X	
	Any workmanship damage, e.g., scissor or knife cut	X	
Seams and Stitching	Any open seam (except on gauntlet hem)	X	
	NOTE: When one or more stitches are broken or two or more consecutive skipped stitches or a runoff occurs on a single stitched seam or on both rows of stitching on a double stitched seam; it shall be classified as a major defect. When one or more stitches are broken or two or more consecutive skipped stitches or a runoff occurs on only one row of a double stitched seam, it shall be classified as a minor defect.		
	Open stitching on gauntlet hem		X
	NOTE: When one or more stitches on a line of stitching are broken or when two or more continuous skipped or runoff stitches occur		
	Not specified seam or stitch type	X	
	Any line of stitching omitted	X	
	Any line of stitching misplaced or not beginning or ending where specified	X	
	Loose tension resulting in a loose seam	X	

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:53Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Seams and Stitching (Cont'd)	Any part of glove caught in an unrelated operation	X	
	Tight tension (stitches break or cutting of leather in the direction of the seam or stitching)	X	
	Ends of stitching produced with 301 stitch type, when not caught in other seams or stitching, backtacked less than 1/2 inch		X
	Ends of stitching produced with 401 stitch type, when not caught in other seams or stitching, not having chain extending beyond each end	X	
	Ends of stitching produced with 401 stitch type, when not caught in other seams or stitching, having chain extending less than 1/2 inch or more than 3/4 inch beyond each end		X
	Thread breaks (all stitch types) stitched less than 1/2 inch on either side of break		X
	Stitches per inch (to be scored only when the condition exists on the major portion of seam or stitching):		
	1. One or two stitches per inch less than the minimum		X
	2. Three or more stitches per inch less than specified	X	
	3. More than the specified maximum number of stitches per inch, damaging leather	X	
	4. More than the specified maximum number of stitches per inch, but not damaging leather		X
	Gage of stitching irregular or not as specified, seriously affecting serviceability	X	
	Gage of stitching irregular or not as specified, affecting serviceability but not seriously		X

Source: https://assist.dla.mil -- Downloaded: 20260-18T12:53Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Assembly detail	Any glove not neatly laid-off		X
	Any finger or thumb distorted or twisted, affecting comfort of wearer	X	
	Not constructed with specified number of pieces of leather, knitted glove liner, and gauntlet linings	X	
	Any reinforcement piece, i.e., patch, flap or thumb welt missing, varying from specified dimension, or not completely caught in seam or stitching	X	
Label (Marking)	Omitted, incorrect, illegible, or incomplete	X	
	Misplaced		X

4.4.2.2 Dimensional examination. The glove shall be examined for dimensional defects. Any dimension that is not within the established tolerance, shall be classified as a defect (see 3.8).

4.4.2.3 Inspection levels and acceptable quality levels (AQL's). The inspection levels, expressed in defects per 100 units for visual and dimensional examination, shall be as follows:

	Inspection Level	AQL's Major	Total
For defects applicable to 4.4.2.1	II	2.5	6.5
For defects applicable to 4.4.2.2	S-3	-	4.0

4.4.3 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking complies with the Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery except that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:53Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, or improper size, location, sequence or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, improper taping, loose strapping, or inadequate stapling. Bulged or distorted container.
Content	Number of gloves per bundle is more or less than required. 1/

1/ For this defect, two bundles from each shipping container in the sample shall be examined.

5. Packaging

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Five gloves of one size and hand only, shall be evenly stacked in a bundle. The gloves with palms facing up shall be alternately reversed, fingertip to gauntlet. Each bundle shall be securely tied with cotton tape or twine.

5.1.2 Level C (Commercial packaging). Gloves shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The contractor may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Twenty gloves of one size and hand only, packaged as specified in 5.1 shall be packed within a fiberboard shipping container assembled, closed, and reinforced conforming to class weather-resistant, grade V2s, size 1A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class weather-resistant, variety DW, grade V15c of MIL-B-17757. Level A packages shall be packed on edge one in length, four in width and one in depth within the shipping container. Toward the end of the contract or order, or when there is less than the required amount per container of the same size, mixed sizes of one hand only may be packed within the same shipping container.

Source: https://assist.dla.mil -- Downloaded: 202640-18T12:53Z
Check the source to verify that this is the currentversion before use.

5.2.2 Level B. Twenty gloves of one size and hand only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to class domestic, grade 275, size 1A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic, variety DW, grade 200 of MIL-B-17757. Level A packages shall be packed on edge one in length, four in width and one in depth within the shipping container. Toward the end of the contract or order, or when there is less than the required amount per container of the same size, mixed sizes of one hand only may be packed within the same shipping container.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3s, W5c or W6c fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the box specification.

5.2.3 Level C (Commercial packing). Gloves, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with U.S. Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Labels, mixed sizes. Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly printed thereon and under these words shall be legibly printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The glove is intended to be used by chippers and personnel engaged in similar occupations by the military services.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification
b. Size required (see 1.2)
c. Whether glove is required for left hand or right hand (see 1.2).
d. Whether first article sample is required (see 3.2)
e. Selection of applicable levels of packaging and packing required (see 5.1 and 5.2)
f. When weather-resistant grade fiberboard shipping containers are required for level B packaging (see 5.2.2.1)

6.3 Samples. For access to samples, address the procuring office issuing the invitation for bids.

Review
DLA- TT

Preparing activity:
Navy - NU

Project No. 8415-N040

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:53Z
Check the source to verify that this is the current version before use.

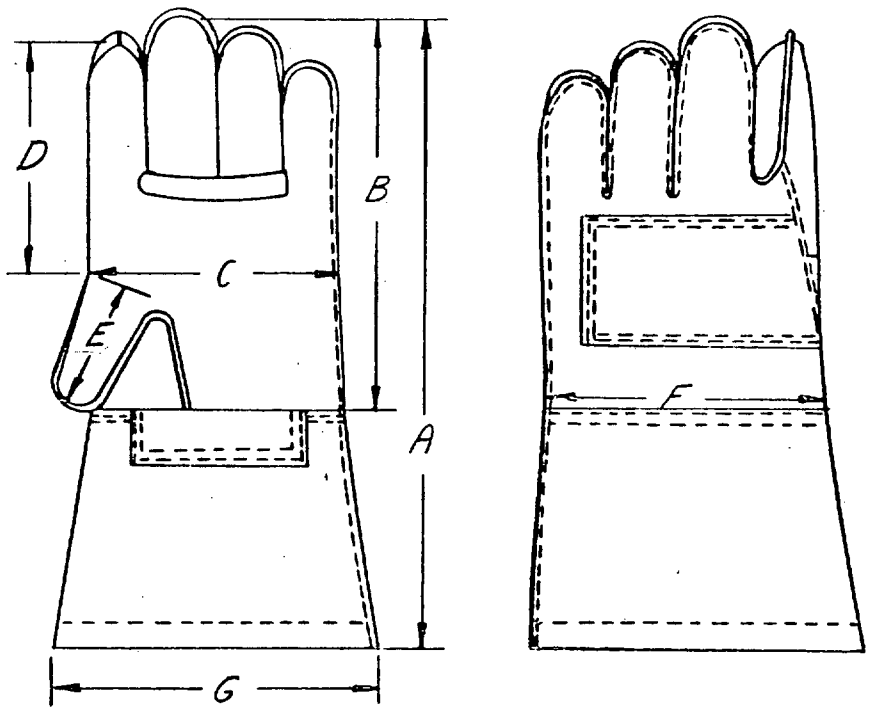


FIGURE 1 GLOVE, CHIPPER'S, GAUNTLET

☆U.S. GOVERNMENT PRINTING OFFICE: 1980 — 603-121/3377

Source: https://assist.dla.mil -- Downloaded: 202640-18T12:53Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-G-19465E(NU) GLOVE, CHIPPER'S, GAUNTLET

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:53Z
Check the source to verify that this is the current version before use.