MIL-H-19448C
8 May 1985
SUPERSEDING
MIL-H-19448B
22 January 1980

MILITARY SPECIFICATION

HAT, SERVICE: WITH CHIN STRAP

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for a fur felt campaign style service hat.

1.2 Classification. The service hat shall be one type in the following classes and sizes, as specified (see 6.2).

1.2.1 Class.

Class 1 - Army/Marine Corps Olive Drab
Class 2 - Air Force Blue 1571
Class 3 - Air Force Maroon

1.2.2 Sizes. The service hat shall be manufactured in the standard regular oval in the following commercial 1/8-inch sizes, using 7-1/8 as the pivot size.

Schedule of Sizes

6-1/2	6-5/8	6-3/4	6-7/8	7	7-1/8
7-1/4	7-3/8	7-1/2	7-5/8	7-3/4	

2. APPLICABLE DOCUMENTS

2.1 Government documents.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commandant of the Marine Corps, Headquarters, U. S. Marine Corps (LMA-1), Washington, D. C. 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:51Z
Check the source to verify that this is the current version before use.

2.1.1 Specifications standards, and handbooks. Unless otherwise specified, the following specifications standards and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-276	-Thread, Cotton.
V-T-295	-Thread, Nylon.
KK-L-271	-Leather, Cattlehide, Strap, Vegetable Tanned.
DDD-L-20	-Label, for Clothing, Equipage, and Tentage, (General Use).
PPP-B-636	-Boxes, Shipping, Fiberboard.

MILITARY

MIL-E-20652/1	-Eyelet, Metallic, Rolled Flange Type, and Eyelet Washer.
MIL-S-43993	-Sweatband, Headwear: Artificial Leather.

STANDARDS

FEDERAL

FED-STD-191	-Textile Test Methods.
FED-STD-751	-Stitches, Seams and Stitchings.

MILITARY

MIL-STD-105	-Sampling Procedures and Tables for Inspections by Attributes.
MIL-STD-129	-Marking for Shipment and Storage.
MIL-STD-147	-Palletized Unit Loads.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

LAWS AND REGULATIONS

U. S. Postal Service Manual

(Application for copies should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.)

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:51Z
Check the source to verify that this is the currentversion before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which indicated as DOD adopted shall be the issue listed in the current DODISS and the supplement thereto, if applicable.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Association, ATTN: Order Section, 1616 P Street, N. W., Washington, D. C. 20026.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence.

3. REQUIREMENTS

3.1 Standard samples. The standard samples are furnished solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.4 and 6.4).

3.3 Materials.

3.3.1 Basic fabric. The felt shall be made from a fur mixture composed of only virgin cut furs. The mixture shall not contain any piece furs which are cut, boiled or chopped, nor any reused or reprocessed fibers of any sort. The quality of the felt shall be equal to or better than the felt in an approved sample, and shall otherwise meet the requirements of this specification.

3.3.1.1 Weight. The finished felt shall weigh not less than 25 ounces per square yard. The finished hats shall weigh between 7 and 9 ounces, according to size.

3.3.1.2 Bursting strength. The finished felt of the hat shall have a bursting strength no less than 170 pounds when tested as specified in 4.5.1.

3.3.1.3 Color. The color of the felt shall be Army/Marine Corps olive drab for class 1, Air Force blue 1571 for class 2 and maroon for class 3. Shades shall match the standard samples. The shade shall be obtained by metallic dyeing or acid dyeing and shall show fair (good) color fastness to light after 80 hours of fade-ometer testing when tested as specified in 4.5.1.

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:51Z
Check the source to verify that this is the current version before use.

3.3.2 Sweatband. The sweatband shall be full grain vegetable tanned leather or artificial leather conforming to MIL-S-43993. The sweatband shall not be less than 1-1/2 inches wide, 5/128 inch thick and shall be dyed a black shade, or as an alternate, a brown shade for class 1 hats only may be used. The sweatband shall be provided with a reed covered with bias cut coated muslin not less than 3/4 inch wide, and dyed a black shade. An oil silk or plastic interlining not less than 1 inch wide, like or equal to that in an approved sample hat shall be provided between the sweatband and the hat. The oil silk or plastic interlining may be pieced, provided seams are overlapped and ziz-zag stitched.

3.3.3 Chin strap and sliding keeper. The chin strap and sliding keeper shall be made of leather conforming to type I or type II, class 2, of KK-L-271. The leather shall be dyed and smooth finished on the grain side. The color of the chin strap and slide keeper shall be black shade 111. The strap shall measure 4-1/2 to 5-1/2 ounces in thickness and shall be 12/32 $\pm$ 1/32 inch wide by 29 $\pm$ 1/4 inches long, exclusive of the buckle. The sliding keeper shall be approximately 1/16 inch thick and shall conform in width to the width of the strap. Both strap and keeper, on the outside, shall be creased lengthwise approximately 1/16 inch from each edge. The strap shall be pointed at the leading end and shall have nine 2/32 to 3/32 inch diameter holes which shall be properly centered and spaced 11/32 to 19/32 inch apart measuring from center to center of each hole. The first hole shall be 1-3/4 to 2-1/4 inches from the pointed end (see Figure 1). The staples in the loop at the buckle end of the strap and in the sliding keeper shall be made of rust-resistant metal not more than 0.026 inch thick, and shall have flat, smooth-surfaced heads which shall be as flush with the surface of the leather as practicable.

3.3.4 Chin strap buckle. The chin strap buckle shall be a tongue type center bar buckle made of rust-resistant 1/32 inch thick steel and shall measure overall approximately 3/4 inch long by approximately 9/16 inch wide and shall have openings measuring approximately 3/8 inch wide.

3.3.5. Hat band and bow. The material for the hat band and bow shall be grosgrain ribbon having a rayon warp and single thread (double shot) cotton filling. The ribbon and bow shall be dyed an olive drab for class 1 and black 111 for class 2 and 3 and shall match the shade of an approved sample. The ribbon and bow shall show good fastness to light, perspiration and wet (dry) cleaning and shall meet the following requirements when tested as specified in 4.5.1.

Width overall, including selvages: 12 ligne $\pm$ 1/2 ligne
Weight per gross yard, minimum: 30 ounces
Filling threads per inch, minimum: 68
Total warp ends, full width, including selvages, minimum: 236
Yarn ply warp: 1
Yarn ply filling: 2
Denier warp: 154 $\pm$ 8
Equivalent - count 36's
Weave: Grosgrain
Material warp: Viscose rayon
Material filling: Mercerized cotton

Source: https://assist.dla.mil -- Downloaded: 202640-18T12:51Z
Check the source to verify that this is the currentversion before use.

3.3.6 Eyelets. The eyelets shall be aluminum or brass, rolled flange type with the barrel scored 6 to 8 scores. The eyelets shall conform to MIL-E-20652/1, BBE103 or BE108 as applicable, and shall be enameled a shade closely matching the shade of the hat. The eyelets in the crown shall be round with an inside diameter of 0.1875 inch, an outside diameter or 0.390 and a barrel length under the flange of 0.15625 to 0.1875 inch. The chin strap eyelets shall be oblong in shape and shall measure 0.650 inch long, 0.231 inch wide inside below the flange, 0.860 inch long by 0.409 inch wide outside across the flange, and shall have a barrel length under the flange of 0.15625 to 0.1875 inch.

3.3.7 Thread.

3.3.7.1 Nylon thread. The nylon thread shall conform to V-T-295. The thread for machine sewing shall conform to type I, size 00 for inside and outside seaming and stitching. The thread for hand sewing shall be type IV, class 2, size A, 2-ply.

3.3.7.2 Cotton thread. The cotton thread shall conform to V-T-276. The thread shall conform to type IB3, left twist, glazed finish, ticket No. 40, 4-ply for seaming and stitching the sweatband to the hat.

3.3.7.3 Color and colorfastness. The thread shall be black or olive drab shade T-1, Cable No. 66023 to approximate shade of the material being sewed. The dyed thread shall show good fastness to laundering, light, wet (dry) cleaning, perspiration and weathering, when tested as specified in the thread specification.

3.3.8 Identification and size label. Each hat shall have an identification label conforming to type IV, class 4 of DDD-L-20, and a size label conforming to type VI, class 2 of DDD-L-20. The printed size on the label shall be clearly visible when sweatband is attached to the hat. Identification markings shall be applied in the location shown in Figure 1. A combination identification-size label conforming to type IV, class 4 of DDD-L-20 may be used. The label shall show good fastness to dry cleaning.

3.4 Design. The hat shall be the campaign style design shown on Figures 1 and 2, having a "Montana" peak (four indentations) type crown and a 3-inch-wide, double thick, flat brim. The hat shall be trimmed with a grosgrain ribbon and bow, and shall have four round eyelets in the crown for ventilation and two oblong eyelets in the brim for a leather chin strap.

3.5 Construction. The hats shall be manufactured in accordance with the operations, and the stitch, seam and stitching types specified in Table I. The contractor is not required to follow the exact sequence of operations listed in Table I, but all operations specified shall be used to manufacture the hats.

3.5.1 Stitches, seams and stitchings. The stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted. If two or more seams or stitch types are given for the same part of an operation, any one of them may be used. Seams shall be sewn so that no raw edges, run offs, twists, pleats, puckers, or open seams will result. All

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:51Z
Check the source to verify that this is the current version before use.

seams shall start and finish evenly. Thread tension shall be maintained so that the stitching will not be tight or loose.

3.5.1.1 Tacking and backstitching. Ends of all seams and stitching (stitch type 301), except ends of a continuous line of stitching, when not caught in other seams or stitchings shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks shall be secured back of the break not less than 1/2 inch.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1.	Blend, clean and dye fur.					
	a. The furs shall be blended in a mixing machine, then blown through sufficient sections of a blowing machine to remove dirt, hair and other unwanted foreign matter.					
	b. Fur shall be dyed by metallic or acid dyeing to the required shade.					
2.	Form body and brim of hat.					
	a. The weighed-in fur, as specified in 3.3.1.1, shall be formed on cones measuring not less than 28 X 30 inches for size 7-1/8, and other sizes shall be formed on cones proportionately larger or smaller.					
	b. The bodies shall be shrunken to the desired size of stump which shall be marked, notched, or strung to indicate the head size.					
	c. The brim portion of the stump shall be stiffened with approximately 5-1/2 degrees of shellac water stiffening which shall not rise into the crown beyond where the top edge of the ribbon band will be placed on the finished hat.					

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:51Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
3.	Crown and brim; block, dry and pounce.					
	a. The hat shall be tipped, brimmed, blocked and thoroughly dried.					
	b. Rough pounce crown, upper brim and under brim.					
	c. Bodies shall be steam blocked on wood blocks of correct size.					
	d. Wet and iron crown until dry. Wet and iron upper brim flat until dry.					
	e. Pounce crowns and upper and under brims evenly to remove excess hair, fur nap and extraneous matters to produce a clean and clear surface of uniform appearance. The outer surfaces of the hat shall be free of dags, welts, shoves, streaks, crows marks and other imperfections.					
4.	Form indentations in crown.					
	a. Hats shall be hydraulically pressed in molds which will produce a shape with four indentations as specified in 3.4.					
5.	Attach eyelets to crown and brim.					
	Finished appearance. The eyelets shall be properly positioned and securely attached through the outside of the crown and securely clinched on the inside without distorting and cutting material or splitting the flange of the eyelet.					
	a. Mark each hat for the location of four round eyelets, one in the front, one in the back, and one on each side. The marks shall be placed in the crown 2-3/4 ± 1/8 inches above the brim in a size 7-1/8 hat. The position of eyelet marks for all other sizes shall be graded proportionately to the height of the crown (see Table II).					

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:51Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
	b. Mark each hat for the location of two oblong chin strap eyelets on the brim, one on each side of the hat 3/8 ± 1/8 inch from the base of the crown, measuring to the center of the eyelet, and 3/4 ± 1/8 inch forward of the side crown eyelets, measuring from center to center.					
	c. Punch a hole at the marks through the crown and on the brim.					
	d. Insert the round eyelets through the holes on the crown and securely clinch the eyelets.					
	e. Insert the oblong eyelets through the holes on the brim and securely clinch the eyelets.					
6.	Assemble sweatband (See Figure 1).					
	a. The covered reed and oil silk or plastic interlining shall be joined to the sweatband with zig zag or ornamental offset stitch type. Nylon top thread and cotton thread may be used.	304	SSa-1	6-8	00	00
	b. The outer edge of sweatband shall be flanged to have a cushion effect.					
	c. Mark and cut the sweatband to the correct size.					
	d. The ends of the sweatband shall be joined with zig zag or ornamental offset stitch type. The butted ends of sweatband shall be backed on the underside with a 5/8-inch strip of print cloth or sheeting, coated lightly on one side with proxyin or vinyl.	304	SSa-1	10-12	00	00
	e. A black tie bow, shall be placed at the upper edge of the sweatband at the back seam and securely tacked through each loop and through the center of the tie bow.	Hand or Machine		5-7	A 00	00

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:51Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
6.	Assemble sweatband (See Figure 1). (cont'd)					
	f. The ends of reed covering and oil silk or plastic covering shall be tacked adjacent to but not through the sweatband.	304 or 404	FSa-1	5-8 (per tack)	00	00
	g. The identification label shall be stamped on the inside of the sweatband (see Figure 1). The size label shall be tacked on the inside of the sweatband joining seam, extending upward into the crown with the printed hat size visible above the upper edge of the sweatband. When the combination identification-size label is used, the label shall be stamped in the same position as the identification label (see figure 1).	Hand or Machine			A 00	 00
	h. The sweatband assembly shall be joined to the crown by stitching through the reed covering.	301	EF1-1	4-6	40/4	40/4
7.	Assemble ribbon band.					
	a. The ribbon shall be securely sewn through the crown with no less than 4 tacks, exclusive of stitches concealed under the bow, evenly placed at the extreme lower edge of the band.	Hand or Machine			A 40/4	
	b. The bow shall measure 3-1/2 ± 1/8 inches in length and shall have a cross piece of the same material at the center of the bow, slightly drawn taut to effect a downward soft pleat in the bow.					
	c. The bow shall be placed at the left side, as the hat is worn, centered with the side crown eyelet and securely sewn with concealed stitching.	Hand or Machine		2-3 6-8	A 40/4	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:51Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
8.	Clean hat. a. The hat brim shall be put through a steam curler machine to shrink the edge of the brim to prevent drooping. b. Trim all ends of threads and remove loose threads from hat. Remove all spots and stains. c. Thread the pointed end of the chin strap through the top side of the oblong eyelet on the left side of hat; pull strap through and thread strap through the underside of oblong eyelet on the right side of hat.					

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:51Z
Check the source to verify that this is the current version before use.

3.6 Finished measurements. The finished hat shall conform to the measurements shown in Table II. Gage No. 556 shall be used for head measurements.

Table II. Finished measurements

Size of Hat	Head Measurement	Height of Crown	Width of Brim
6-1/2	20-1/2	4-15/16	3
6-5/8	20-7/8	5	3
6-3/4	21-1/4	5-1/16	3
6-7/8	21-5/8	5-2/16	3
7	22	5-3/16	3
7-1/8	22-3/8	5-4/16	3
7-1/4	22-3/4	5-5/16	3
7-3/8	23-1/8	5-6/16	3
7-1/2	23-1/2	5-7/16	3
7-5/8	23-7/8	5-8/16	3
7-3/4	24-1/4	5-9/16	3
Tolerence	+1/4 -1/8	± 1/16	± 1/16

3.7 Workmanship. The hat shall conform to the quality and grade of product established by this specification. Occurrence of defects shall not exceed the applicable acceptable quality level (AQL).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4).
2. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified herein, sampling for inspection shall be performed in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:51Z
Check the source to verify that this is the current version before use.

4.4 First article inspection. When first article is required, inspection shall be made of a completely fabricated hat of the specified class for all provisions of this specification.

4.5 Quality conformance inspection.

4.5.1 Testing of components. Testing of components shall be in accordance with applicable subsidiary specifications and standards to the extent applicable, except that this specification shall govern. Testing shall be performed on components listed in Table III for characteristics noted. The method of testing specified in FED-STD-191, wherever applicable and as listed in Table III shall be followed. All requirements are applicable to the sample unit. When the data in the "number of determination per sample unit" and the "results reported as" columns are not specified in Table III, they shall be as required by the referenced test method. Unless otherwise specified in subsidiary specifications, sampling shall be in accordance with the following:

Lot size	Sample size
800 or less	2
801 to 22,000 inclusive	3
22,001 and over	5

The lot shall be unacceptable if one or more sample units fail to meet any test requirement specified. All test reports shall contain the individual values utilized in expressing the final result. The unit for expressing lot size and sample unit for testing each component shall be in accordance with applicable subsidiary specifications and as follows:

Components	Lot size expressed as	Sample unit for testing
Fur felt	1 Fur Felt body	20 square inches
Staples	Great gross	10 each
Ribbons, grosgrain (hat band)	yards	1 continuous yard

4.5.2 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies.

4.5.3 Examination of the end item. The end item shall be examined for defects listed in 4.5.3.1 and 4.5.3.2. The sample unit shall be one hat. All defects shall be classified as indicated below, except those with an asterisk (*) in classification column which shall be classified as follows:

Major Defect - When seriously affecting appearance or serviceability.
Minor A Defect - When affecting appearance or serviceability but not seriously.

4.5.3.1 General defects. General defects shall be classified as follows:

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:51Z
Check the source to verify that this is the current version before use.

Table III. Test Methods

Components	Characteristics	Rqmt. para.	Test Method	No. Determinations per sample unit	Results reported as
Fur felt	Bursting strength (lbs)	3.3.1.2	5120	5	Avg of 5 det. to nearest 1.0 lb.
	Color	3.3.1.3	Visual	1	Pass or fail
	Colorfastness to light	3.3.1.3	5660	1	Good, fair or poor
Muslin	Material identification 1/	3.3.2			
Interlining	Material identification 1/	3.3.2			
Staple	Finish 1/	3.3.3			
	Thickness	3.3.3	Micrometer	1	Pass or fail
Chin strap buckle	Material identification 1/	3.3.4			
	Finish 1/	3.3.4			
Ribbon, Grosgrain	Material identification	3.3.5			
	Warp 1/	3.3.5			
	Filling 1/	3.3.5			
	Yarn ply:	3.3.5			
	Warp 1/		Visual	1	Pass or fail
	Filling		Visual	1	Pass or fail

Source: https://assist.dla.mil -- Downloaded: 202640-18T12:51Z
Check the source to verify that this is the current version before use.

Table III. Test Methods

Components	Characteristics	Rqmt. para.	Test Method	No. Determinations per sample unit	Results reported as
	Yarn size:	3.3.5			
	Warp		1/		
	Filling		1/		
	Weave	3.3.5	Visual	1	Pass or fail
	Weight per gross yds (ozs)	3.3.5	5040	5	Avg of 5 det to nearest whole no.
	Total warp ends	3.3.5	5050	5	Avg of 5 det to nearest whole no.
	Picks per inch	3.3.5	5050	5	Avg of 5 det to nearest whole no.
	Colorfastness to:				
	-light	3.3.5	5660	1	Good, fair or poor
	-perspiration	3.3.5	5680	1	Good, fair or poor
	-wet (dry) cleaning	3.3.5	5622	1	Good, fair or poor
Eyelets	Material identification 1/	3.3.6			

1/ Accept on certificate of compliance.

Source: https://assist.dla.mil -- Downloaded: 2026-01-13T12:51Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Material defects and damages	a. Basic fabric:			
	1. Holes or any defect which may develop into a hole.	X		
	2. Dags (a foreign body or particle embedded in the fur of the felt).	X		
	3. Pits (any indentation in the felt).	X		
	4. Streaks (lines running across the felt).	X		
	5. Welts (small ridges or fur protruding from surface of felt).	X		
	6. Lumps (small balls of matted fur protruding from surface of felt).	X		
	7. Mottled felt (spotted or having marble effect) affecting appearance.		*	
	8. Weak spots.	X		
	NOTE: Weak spots can be detected easily by folding felt and running fingers along both sides of the fold. If the felt is uneven or lumpy to the feel, it is an indication of a weak spot.			
	9. Closely pounced (too much of the surface of felt taken off in pouncing process, exposing background of felt).	X		
	10. Scars (marks or grooves made in gaging).	X		
	11. Crows marks (shiny streaks running across felt).	X		
	12. Hairy area (excessive amount of hair in felt).	X		

Source: https://assist.dla.mil -- Downloaded: 20260-18T12:51Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
	13. Wrinkles or folds easily detected.	X		
	b. Leather:			
	1. Type not as specified.	X		
	2. Finish not as specified.	X		
	3. Deep cuts, open scratches, damaged grain, grub holes, brands, hip marks, scars, cracked grain, veins, fat wrinkles or course grain, seriously affecting serviceability or appearance of the leather.	X		
	4. Flanky, spongy or boney leather.	X		
	5. Color not as specified.	X		
	6. Manufacturing damage or any operation omitted or not properly performed.	X		
	NOTE: Light, well-healed scratches, grub holes, slight fat wrinkles, or slight salt stains shall not be classified as defects.			
Cleanness	a. Any spots or stains clearly noticeable:			
	- on outside	X		
	- on inside		X	
Components and assembly	a. Any component part or required operation omitted (unless classified elsewhere).		*	
Blocking	a. Omitted.		*	
	b. Poorly blocked.		*	
Seam and stitching	a. General			
	1. Not specified shade of thread.		*	

Source: https://assist.dla.mil - Downloaded: 202640-18T12:51Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
	2. End of stitching, when not caught in other seam or stitching, backtacked less than 1/4 inch, or end of brim stitching less than 1/2 inch beyond each end of break.			X
	3. Thread break stitched less than 1/2 inch beyond each end of break.			X
	b. Gage of stitching.			
	1. Irregular, i.e., unevenly gaged or various stitches not uniform, affecting appearance.			X
	2. Beyond range of width specified or varies more than 1/16 inch when no range is specified.			X
	c. Open seams.			
	1. On sweatband			
	- open on back seam of sweatband.	X		
	- open on sweatband joining to reed covering.	X		
	NOTE: A seam shall be classfied as open when 1 or more stitches joining seam are broken or when 2 or more continuous skipped stitches or run-offs occur.			
	2. Run-offs (see classification of open seams).			
	3. Stitch tension.			
	- Loose tension resulting in a loose seam.	X		

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:51Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
	4. Stitches per inch (to be scored only if the condition exists on major portion of seam).		*	
	Applicable to 10-12 stitches per inch.			
	- 1 to 2 stitches less than minimum specified.			X
	- 3 or more stitches less than minimum specified.	X		
	- more than maximum specified.			X
	Applicable to 4-8 stitches per inch.			
	- 1 stitch less than minimum.			X
	- 2 or more stitches less than specified.	X		
On outside of hat crown.	a. Poorly shaped, affecting appearance.	X		
Brim	a. Stiffness not equal to approved sample.		*	
	b. Wavy edge, affecting appearance.	X		
	c. Not pressed flat.		X	
Eyelets on crown (position)	a. Center of eyelet positioned less than 2-5/8 inches or more than 2-7/8 inches above brim for sizes 7-1/8.		X	
	NOTE: Tolerance shall be increased 1/32 inch for each size over 7-1/8 and decreased 1/32 inch for each size under 7-1/8.			

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:51Z
Check the source to verify that this is the currentversion before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
	b. Eyelets out of horizontal alignment by more than 1/8 inch on all sizes.			X
	c. Color not approximating the shade of the hat.			X
Eyelets on brim (position)	a. Center of eyelet positioned less than 5/16 inch or more than 7/16 inch from base of crown.			X
	b. Center of eyelet less than 5/8 inch or more than 7/8 inch from side of crown eyelet, measuring from center to center of eyelets.			X
	c. Eyelets not parallel to crown over 1/16 inch.	X		
	d. All eyelets not the same enameled finish.			X
	e. Color not approximating the shade of the hat.			X
Chin strap and sliding keeper	a. Less than 28-1/2 inches or more than 29-1/2 inches long exclusive of buckle.			X
	b. Less than 5/16 inch or more than 7/16 inch wide.			X
	c. Not embossed.			X
	d. Point at leading end poorly shaped.			X
	e. Less than 8 holes or more than 10.			X
	f. Holes off center, affecting appearance.			X
	g. Holes spaced less than 11/32 inch or more than 19/32 inch apart.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:51Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
	h. First hole less than 1-3/4 inches or more than 2-1/4 inches from pointed end.			X
	i. Sliding keeper omitted or insecurely clinched.	X		
	j. Sliding keeper clinched to strap.			X
	k. Color not as specified.	X		
Trimming (band and bow)	a. Not specified shade.			X
	b. Not lying smooth and flat on crown, affecting appearance.		*	
	c. Bow poorly shaped.			X
	d. Ends of bow insecurely tacked.			X
	e. Bow not centered under crown eyelet.			X
Inside of hat sweatband	a. Less than 1-1/2 inches wide.			X
	b. Sweatband assembly insecurely sewn to crown.	X		
Marking (identification/size)	a. Missing, incorrect or illegible.			X

4.5.3.2 Measurements (size). Any measurement deviating from the nominal dimensions and tolerances specified in Table II shall be scored as a size measurement defect.

4.5.3.3 AQL's and inspection levels. The inspection levels and AQL's expressed in defects per hundred units (DHU) shall be as follows:

	AQL's	Inspection level
For defects listed in 4.5.3.1:		
Major and Minor A	6.5	II
Total (Major, Minor A & Minor B)	10.0	II
For defects listed in 4.5.3.2:		
One class	4.0	S-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:51Z
Check the source to verify that this is the current version before use.

4.5.4 Examination of packaging. An examination shall be made to determine that packaging, packing and marking requirements of Section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and AQL shall be 2.5 DHU.

Examine	Defects
Marking (exterior and interior)	Omitted, incorrect, illegible, or improper size, location, sequence or method of application.
Materials	Any components missing, damaged or not as specified.
	Inadequate application of components, such as incomplete closure of container flaps, improper taping, loose strapping, inadequate stapling.
	Bulging or distortion of containers.
Contents	One or more polyethylene protectors omitted.
	Number of hats is more or less than required.
	One or more separators omitted.
	Size shown on one or more hats not as specified on container.

5. PACKAGING

5.1 Preservation and packaging. Preservation and packaging shall be level A or commercial as specified (see 6.2).

5.1.1 Level A. The crown of each hat shall be covered with a flexible film, polyethylene protector fabricated in the same shape as the service hat. The polyethylene flexible film shall be 0.0015 inch thick. One hat shall be placed within a half slotted fiberboard container conforming to type CF, class domestic, variety SW, style RSC, grade 200 of PPP-B-636. Each carton shall contain a flat brim pressboard insert for shape retention. The outside dimensions of the box shall be approximately 16 inches long by 15 inches wide by 6-1/4 inches in depth. The cover shall be no less than 2-1/2 inches in depth. Closure shall be in accordance with the appendix to the box specification.

5.1.2 Commercial. Commercial packaging shall afford adequate protection against deterioration and physical damage during shipment from the supply

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:51Z
Check the source to verify that this is the current version before use.

source to the first receiving activity. The contractor may use his standard practice provided it meets the requirements specified for commercial packaging.

5.2 Packing. Packing shall be level B or commercial as specified (see 6.2).

5.2.1 Level B. Six unit containers (6 hats), of one size and class only, packaged as specified in 5.1.1, shall be packed in a close fitting fiberboard box type CF class-domestic variety SW, style RSC, grade 200, conforming to the requirements of PP-B-636. Closure shall be in accordance with method II as specified in the appendix to the box specification. Toward the end of the contract, or when there is less than the required amount of the same size and class per container, mixed sizes and classes may be packed within the same shipping container (see 5.4.1).

5.2.2 Commercial. Hats shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules, National Motor Freight Classification Rule and U. S. Postal Service Manual or regulations of other carriers applicable to the mode of transportation.

5.3 Palletization. When specified (see 6.2), hats packed as specified in 5.2 shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.4 Marking. In addition to any special marking required by the contract or purchase order, interior packages, shipping containers, and unitized loads shall be marked in accordance with the requirements of MIL-STD-129.

5.4.1 Labels. Each shipping container packed with mixed sizes and classes (see 5.2.1) shall have, securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 inches by 4 inches. The words "MIXED" shall be plainly stamped or printed on the label. The quantity, sizes and classes of the hats contained in the shipping container shall be legibly stamped or printed under the words "MIXED" on the label.

6. NOTES

6.1 Intended use. The hats are intended for wear by military personnel of the Department of Defense.

6.2 Ordering data.

Source: https://assist.dla.mil -- Downloaded: 202640-18T12:51Z
Check the source to verify that this is the currentversion before use.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

(a) Title, number and date of this specification.
(b) Size and class required (see 1.2)
(c) When first article is not required (see 3.2)
(d) Selection of applicable levels of preservation and packaging and packing (see 5.1 and 5.2).
(e) When palletization is required (see 5.3)

6.2.2 Data requirements. When this specification is used in an acquisition which incorporates a DD Form 1423, Contract Data Requirements List (CDRL) the data requirements identified below shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved CDRL incorportated into the contract. When the provisions of DAR 7-104.9(n)(2) are invoked and the DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order requirements. Deliverable data required by this specification is cited in the following paragraphs.

Paragraph no.	Data requirements	Applicable DID no.	Options
(a) 4.	Inspection System Program Plan	DI-R-4803	- -
(b) 4.4	First Article Inspection Procedures	DI-T-4901	- -
(c) 4.4	First Article Inspection Report	DI-T-4902	- -
(d) 4.5	Production/Acceptance Inspection Procedures	DI-T-4903	- -
(e) 4.5	Production Inspection Reports	DI-T-4904	- -

(Data item descriptions related to this specification, and identified in section 6 will be approved and listed as such in DoD 5000.19L., Vol. II, AMSDL. Copies of data item descriptions required by the contractors in connection with specific acquisition functions should be obtained from the Naval Publications and Forms Center or as directed by the contracting officer.)

6.3 Standard sample. The standard sample may be obtained from the procuring activity or as directed by the contracting officer.

6.4 First article. Examination, tests and approval shall be as specified by the contracting officer (see 3.2).

6.5 Figures. Figures 1 and 2 show general design of the hats and are furnished for information only. In the event of conflict between these figures and the text of this specificiation, the text of his specification shall govern.


Source: https://assist.dla.mil -- Downloaded: 202610-18T12:51Z
Check the source to verify that this is the current version before use.

6.6 Changes from previous issues. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.


Preparing Activity
Navy - MC
Project No. 8405-0992

Custodian:
Army-GL
Navy-MC
Air Force-11
Review Activity:
Army-MD
Air Force-82
Air Force-99
User:
Air Force-45

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:51Z
Check the source to verify that this is the current version before use.

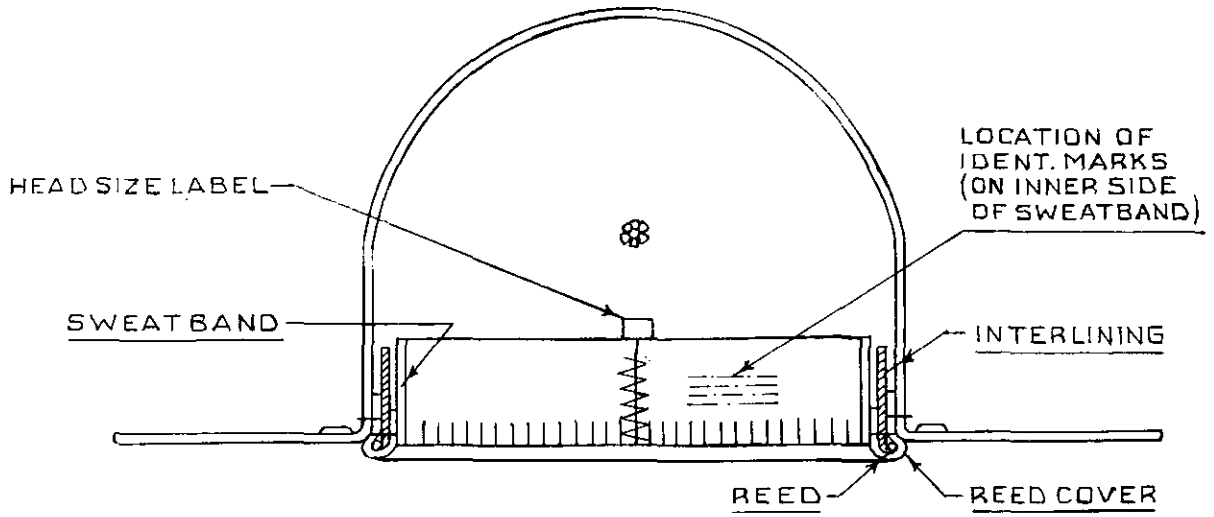

BACK; INSIDE: CUT-THRU VIEW

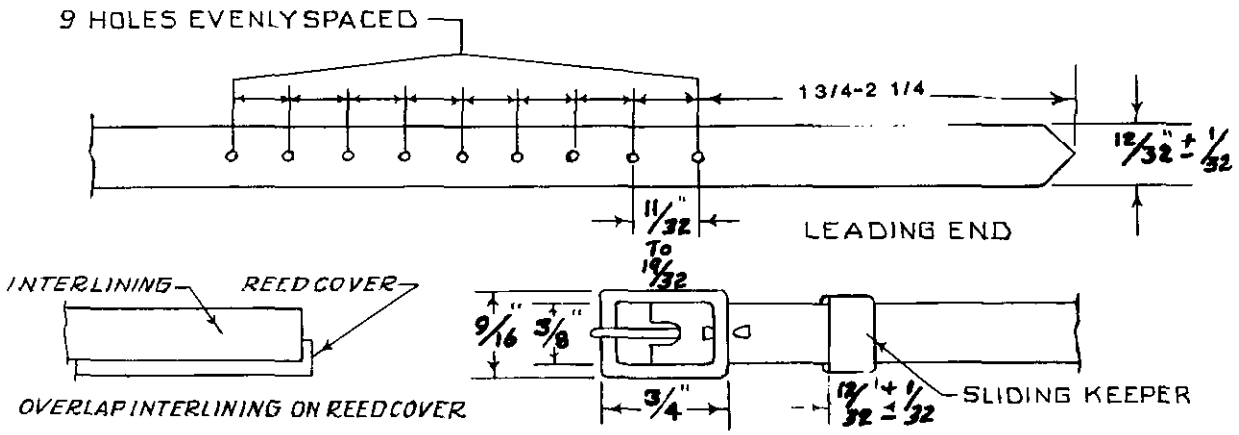


SWEATBAND ASSEMBLY

DETAIL: CHIN STRAP

FIGURE 1: HAT SERVICE, WITH CHIN STRAP

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:51Z
Check the source to verify that this is the current version before use.

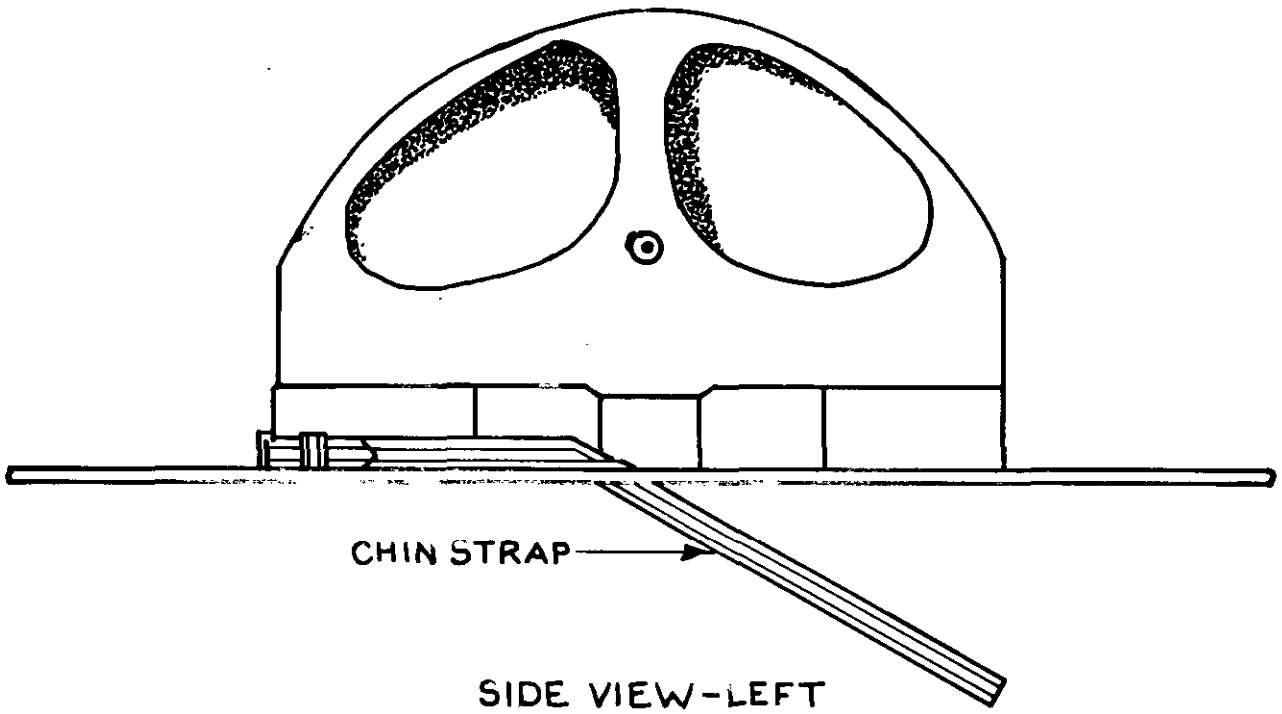

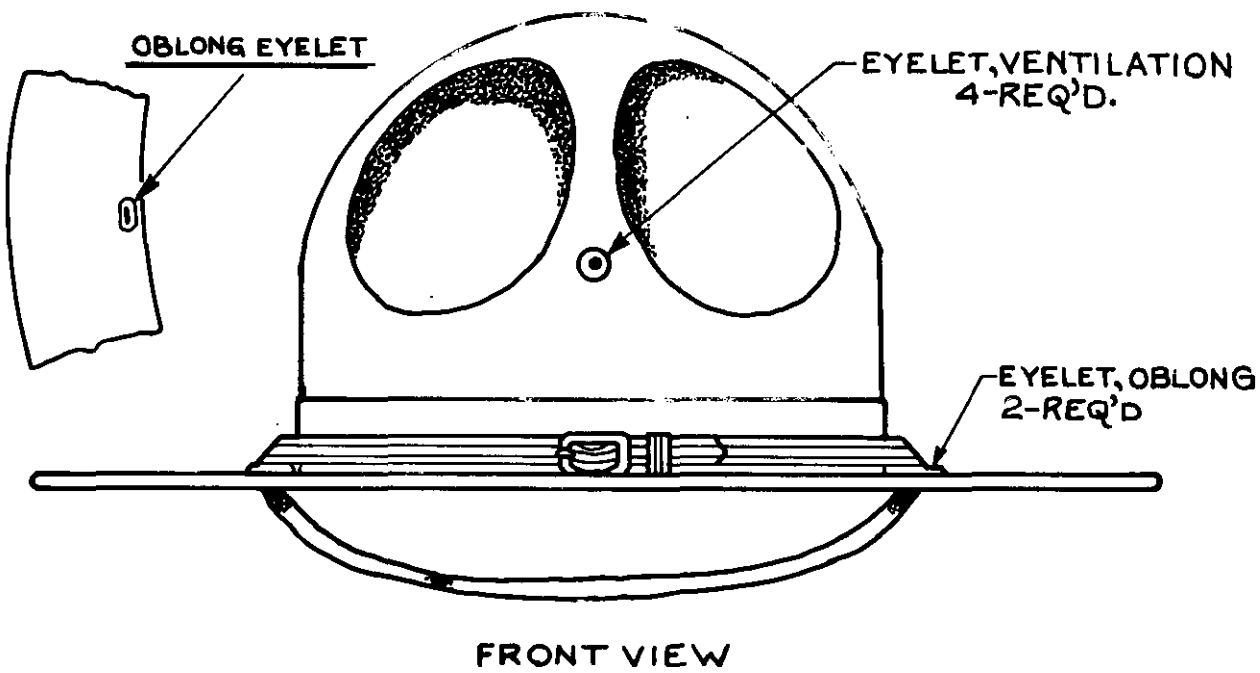


FIGURE 2:

HAT SERVICE, WITH CHIN STRAP

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:51Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-H-19448C	Hat, Service: With Chin Strap

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202640-18T12:51Z
Check the source to verify that this is the current version before use.