MILITARY SPECIFICATION

SEMICONDUCTOR DEVICE, TRANSISTOR, PNP, GERMANIUM, LOW-POWER

TYPES 2N43A AND 2N44A

This amendment forms a part of Military Specification MIL-S-19500/68, dated 28 December 1971, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

* 1.2: Delete "figure 1" and substitute "figures 1 and 2".

PAGE 2

* 3.3, line 2: Delete "figure 1" and substitute "figures 1 or 2".

* After 4.1, add 4.2 as follows (paragraph previously deleted by amendment 1):

"4.2 Qualification inspection. Qualification inspection shall consist of the examinations and tests specified in table I."

* 4.3, delete and substitute:

"4.3 Quality conformance inspection. Quality conformance inspection shall consist of group A inspections."

4.3.1, delete and substitute:

"4.3.1 Group A inspection. Perform 100% group A inspection testing."

* 4.3.2, 4.3.3 and 4.3.4: Delete.

* 4.4, delete and substitute:

"4.4 Methods of examination and test. Methods of examination and test shall be as specified in table I."

PAGE 3

* Add figure 2 as printed on page 3 of this amendment.

PAGES 5, 6, and 7

* Tables II and III: Delete.

PAGE 8

* Add the following new paragraph:

"5.2 Lead configuration adapter. Lead configuration adapter MIL-M-38527/10-010 to be shipped with devices supplied in the TO-5 style case."

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:57Z
Check the source to verify that this is the current version before use.

* NOTE: The margins of this amendment are marked with an asterisk to indicate where changes (additions, modification, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodians:
Army - EL
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI
Navy - OS
Air Force - 11, 99, 85
DLA - ES


User activities:
Army - SM
Navy - CG, MC, AS, SH
Air Force - 13, 15, 85

Preparing activity:
Air Force - 17

Agent:
DLA - ES

(Project 5961-0656)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:57Z
Check the source to verify that this is the current version before use.

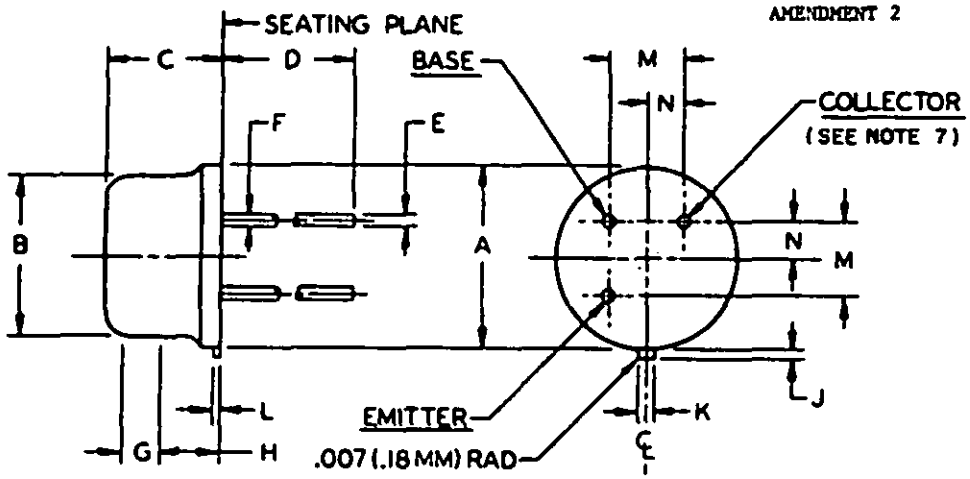

LTR	DIMENSIONS				NOTES
	INCHES		MILLIMETERS		
	MIN	MAX	MIN	MIN	
A	.335	.370	8.51	9.40	
B	.305	.335	7.75	8.51	
C	.240	.260	6.10	6.60	
D	1.500	1.750	38.10	44.45	9
E	.016	.021	.41	.53	2,9
F	.016	.019	.41	.48	3,9
G	.100	---	2.54	---	4
H	---	---	---	---	5
J	.029	.045	.74	1.14	8
K	.028	.034	.71	.86	
L	.009	.125	.23	3.18	
M	.1414 Nom		3.592 Nom		6
N	.0707 Nom		1.796 Nom		6

NOTES:
1. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
2. Measured in the zone beyond .250 (6.35 mm) from the seating plane.
3. Measured in the zone .050 (1.27 mm) and .250 (6.35 mm) from the seating plane.
4. Variations on dimension B in this zone shall not exceed .010 (.25 mm).
5. Outline in this zone is not controlled.
6. When measured in a gaging plane .054 +.001, -.000 (1.37 +.03, -.00 mm) below the seating plane of the transistor maximum diameter leads shall be within .007 (.18 mm) of their true location relative to a maximum width tab. Smaller diameter leads shall fall within the outline of the maximum diameter lead tolerance. Figure 2 preferred measured method.
7. The collector shall be internally connected to the case.
8. Measured from the maximum diameter of the actual device.
9. All 3 leads.
10. Lead configuration adapter supplied with this style case (see 5.2).

FIGURE 2. Physical dimensions of alternate case outline (TO-5) for transistor types 2N43A and 2N44A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:57Z
Check the source to verify that this is the current version before use.