MIL-S-6904/2
19 April 1965

MILITARY SPECIFICATION SHEET

SIGNAL, EMERGENCY WARNING (HORN)

The complete requirements for procuring the signal described herein shall consist of this document and the issue in effect of MIL-S-6904.

FSC 6340

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:41Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and Configuration: See Figure 1.

Design and Construction:

Termination -

Connections - An opening of approximately 3/16-inch diameter shall be provided in the side of the signal housing nearest the terminal post adjacent to the mounting flange of the signal in order to provide an opening for the electrical wiring when the signal is mounted on a solid member.

Terminal Posts - Both leads of the signal shall be connected to No. 6 insulated terminal posts, threaded with 6-32 NC-3A threads in accordance with MIL-S-7742 and mounted inside of the housing.

Operation:

Operating Voltage - The signal assembly shall be designed to operate on any direct current voltage between 20 and 29 volts.

Temperature Range of Operation - The signal shall be suitable for operation at any temperature between -55° C (-67° F) and +70° C (+158° F) and shall not be damaged when exposed to temperatures of -59.3° C (-75° F) and +93.3° C (+200° F) for a minimum period of 72 hours.

Temperature Rise - The signal shall be capable of withstanding continuous operation for a period of 15 minutes at 29 volts, with a maximum temperature rise of 85° C (153° F) on the coil at an ambient temperature of 25° C (77° F). The test sample shall determine that the temperature rise of the coil does not exceed 85° C (153° F) as measured by the resistance method.


Dielectric Strength - The signal shall be so insulated that it will withstand, between terminals and other exposed metal parts, a voltage of 550 rms at commercial frequency for a period of 60 seconds.

Current Consumption - The current consumption shall not exceed 1.0 amp when adjusted to produce the "sound intensity" as specified at 29VDC operation.

Sound Intensity - The signal shall provide a sound intensity of at least 100 decibels as indicated on a standard sound meter at a distance of 3 feet when operated on 29 volt direct current under conditions encountered in a soundproof room.

Endurance - The signals shall satisfactorily withstand the life signal test of 16 hours at 29 volts, consisting of a 5-minute "on" period and a 1-minute "off" period. The sound output shall not drop below 100 decibels as indicated on a standard sound meter at any time when measured at a distance of 3 feet in a soundproof room, without adjusting or cleaning of the contacts. The signals selected for test shall be mounted on a non-resonant stand.

Source: https://assist.dla.mil -- Downloaded: 20260-17T07:41Z
Check the source to verify that this is the current version before use.

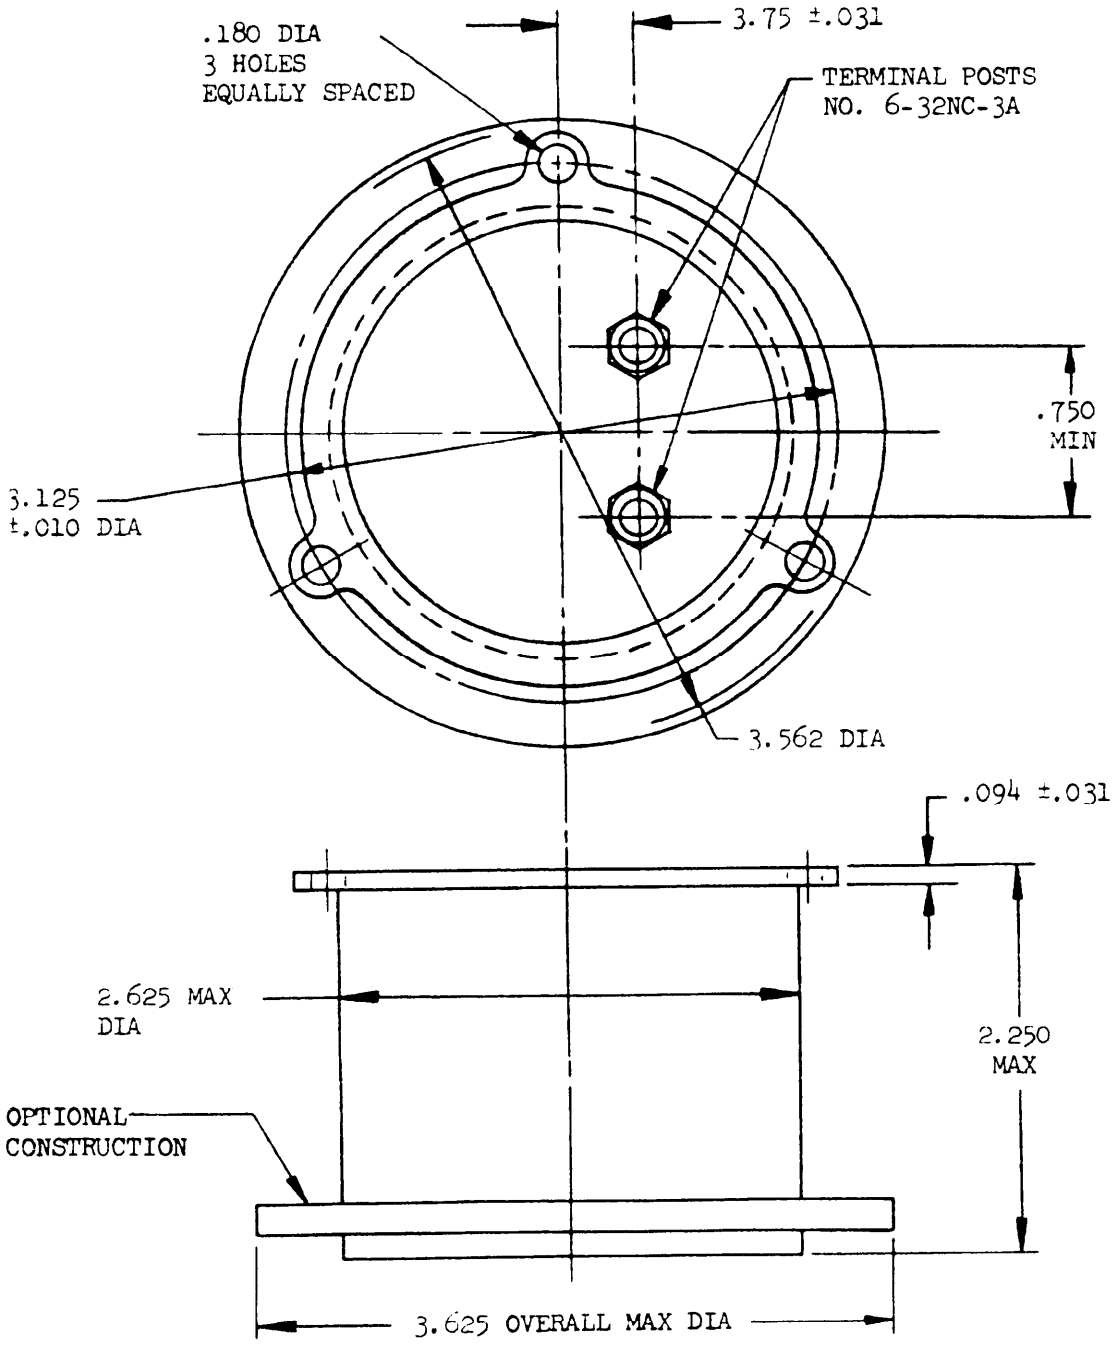

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED,
TOLERANCES: DECIMALS ±.016.

Figure 1. Emergency Warning Signal, Type J2 Horn,
Part No. M6904/2-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:41Z
Check the source to verify that this is the current version before use.

Frequency - The signal shall have an armature stroke frequency of 650 cps ±50 cps, with predominant sound output (output of diaphragm) of 2,700 cps ±500 cps. Measurements shall be made with a General Radio 736A Wave Analyzer, or equivalent.

High Altitude-Low Temperature - The signal shall withstand a temperature of -65° C and a pressure equivalent to 55,000 feet.

Humidity -

Humidity Conditioning - Two of the sample signals shall be mounted in a vertical position and subjected to the following humidity cycling. At intervals during the test, the signals shall be examined for the collection of moisture in the interior of the case, for corrosion of metal parts, or for any other damage. (See 3.2.)

Humidity Cycling - A sound intensity test shall be conducted on the signal. The signal shall then be placed in a chamber and kept for 6 hours at a temperature of 65° C (149° F) at relative humidity of 95 percent. After the required time, the chamber shall be shut off and the signal shall be allowed to cool to room temperature for 18 hours in this atmosphere, in which the humidity rises to 100 percent as the temperature decreases. (Precaution shall be taken to prevent dripping on the signal.) The sound intensity test shall then be conducted at the completion of the cycle, and the intensity shall not have changed by more than 10 decibels from the results obtained at the beginning of the Cycling test. The complete procedure shall be conducted five times. (See 3.2.)

Weight: 0.6 pounds maximum.

Type Number: J2.

Military Part Number: M6904/2-1.

Supersession Data: This specification sheet in conjunction with MIL-S-6904B supersedes MIL-S-6904A and MS25222 (ASG).

Custodians:
Army - MO
Navy - WP
Air Force - 82

Preparing activity:
Navy - WP

(Project No. 6340-0019)

Review activities:
Army - MO
Navy - WP
Air Force - 82

User activities:
Army -
Navy - CG
Air Force -

NOTE: Review/user information is current as of date of this document. Future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:41Z
Check the source to verify that this is the current version before use.