MIL-S-6904/3
19 April 1965

MILITARY SPECIFICATION SHEET

SIGNAL, EMERGENCY WARNING
(HORN WITH A PROJECTOR)

The complete requirements for procuring the signal described herein shall consist of this document and the issue in effect of MIL-S-6904.

FSC 6340

Source: https://assist.dla.mil -- Downloaded: 20261O-17T07:41Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and Configuration: See Figure 1.

Design and Construction:

Adjustment - The signal shall be permanently adjusted in manufacture and shall not require adjustments for its entire life period.

Termination - Electrical connection to the signal shall be by connector MS3102C-10SL-4P as specified on Figure 1. Both terminals shall be insulated from the frame.

Operation:

Temperature Rise - The signal shall be capable of withstanding continuous operation for a period of 5 minutes at 28VDC with a maximum temperature rise of 110° C at an ambient temperature of 25° C (77° F). The test sample shall determine that the temperature rise does not exceed 100° C as measured by the resistance method with 28VDC applied to the terminals.

Low-Voltage Operation - The signal shall be designed to operate at 28VDC. However, the signal shall be capable of starting at 14VDC, but the sound levels specified herein need not be met at that voltage.

Dielectric Strength - The signal shall be so insulated that it will withstand, between terminals and other exposed metal parts, a voltage of 1000V rms at commercial frequency for a period of 60 seconds.

Endurance - The signal shall be capable of operating continuously for 20 hours at an intermittent cycle rate of 2 minutes on and 28 minutes off.

Sound Frequency - The signal shall be capable of producing a signal in three octaves at the frequency ranges and sound levels specified in Table I when operated at 28V.

TABLE I


Frequency ranges and sound levels
at a distance of 5 feet, 0° angle from horn

Frequency Range cps	Minimum Sound Level db*
600-1200	115
1200-2400	116
2400-4800	115

*0db = 0.0002 Dyne/cm^2

Cycling - When energized, the signal shall be capable of providing the specified audio output levels in 1/2 second, or less. When de-energized, the output shall cease in the same period of time.

Source: https://assist.dla.mil -- Downloaded: 202610-17T07:41Z
Check the source to verify that this is the current version before use.

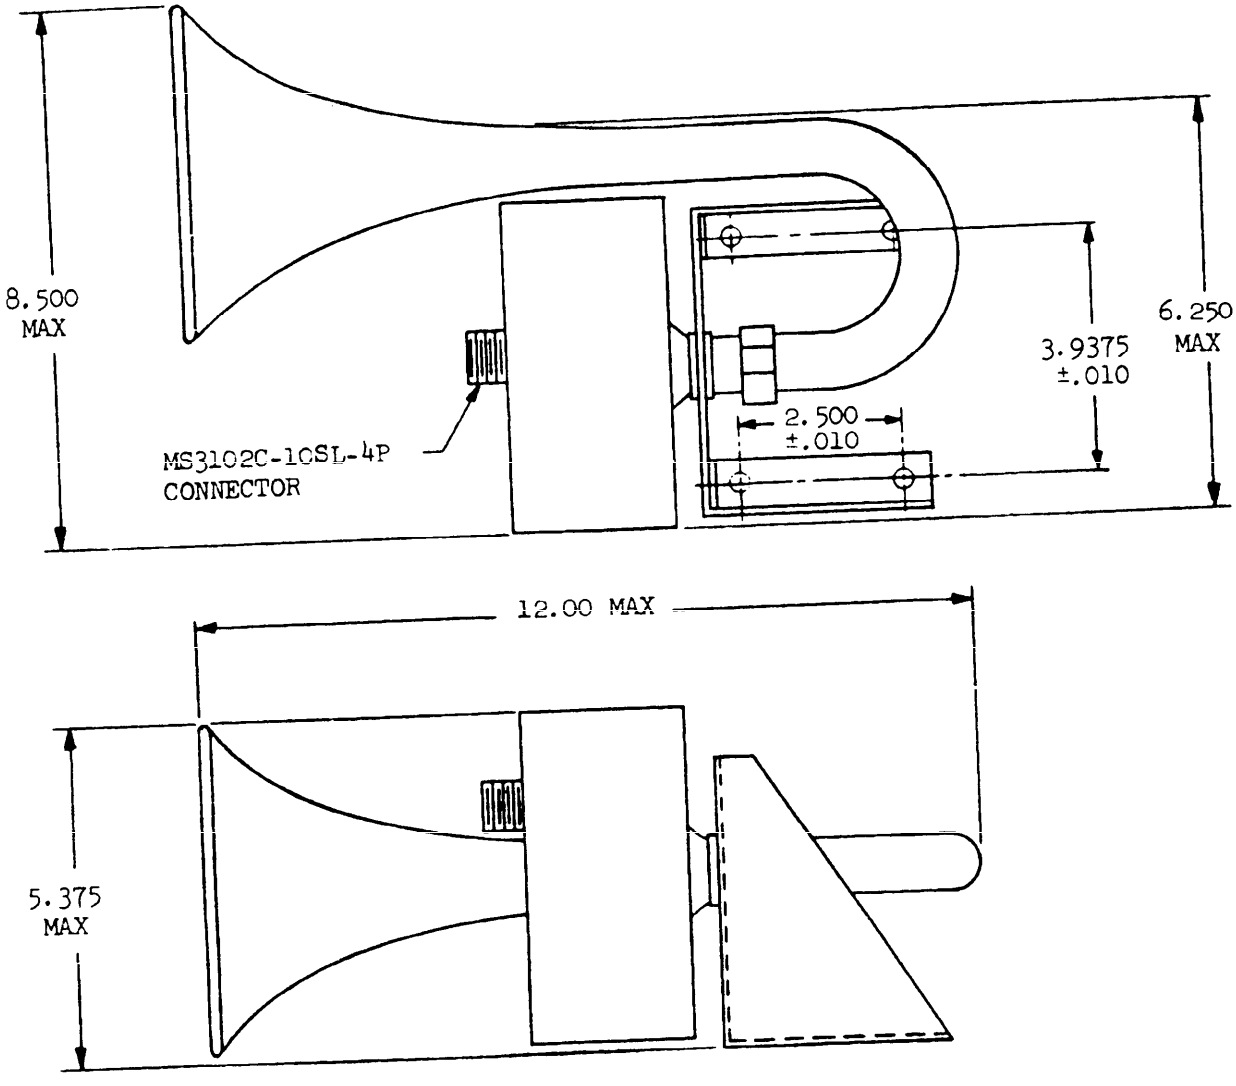

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED,
TOLERANCES: DECIMALS ±.016.

Figure 1. Emergency Warning Signal, Type SDU-1A Horn, Part No. M6904/3-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:41Z
Check the source to verify that this is the current version before use.

Explosionproofing - When the signal is operated in an explosive vapor within or surrounding the equipment, explosionproofing shall be required.

Weight: 4.5 pounds maximum.

Type Number: SDU-1A.

Military Part Number: M6904/3-1.

Supersession Data: This specification sheet in conjuntion with MIL-S-6904B supersedes MIL-H-25747A (USAF).

Custodians:
Army - MO
Navy - WP
Air Force - 82

Preparing activity:
Navy - WP

(Project No. 6340-0019)

Review activities:
Army - MO
Navy - WP
Air Force - 82

User activities:
Army -
Navy - CG
Air Force -

NOTE: Review/user information is current as of date of this document. Future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 202610-17T07:41Z
Check the source to verify that this is the current version before use.