MILITARY STANDARD

AUTOMATED ENGINEERING
DOCUMENT PREPARATION SYSTEM

FILTERS, ELECTRONIC

TO ALL HOLDERS OF DOD-STD-35-25A(MI):

1. THE FOLLOWING PAGES OF DOD-STD-35-25A(MI)HAVE BEEN REVISED AND SUPERSEDE THE PAGES LISTED:

NEW PAGE	DATE	SUPERSEDED PAGE	DATE
9	19 September 1980	9	15 February 1979
10	19 September 1980	10	15 February 1979
27	15 February 1979	(Reprinted without change)	
28	19 September 1980	28	15 February 1979
29	19 September 1980	29	15 February 1979
30	15 February 1979	(Reprinted without change)	
31	15 February 1979	(Reprinted without change)	
32	19 September 1980	32	15 February 1979
33	19 September 1980	33	15 February 1979
34	15 February 1979	(Reprinted without change)	
51	15 February 1979	(Reprinted without change)	
52	19 September 1980	52	15 February 1979
53	19 September 1980	53	15 February 1979
54	15 February 1979	(Reprinted without change)	
55	15 February 1979	(Reprinted without change)	
56	19 September 1980	56	15 February 1979
57	19 September 1980	57	15 February 1979
58	15 February 1979	(Reprinted without change)	
65	15 February 1979	(Reprinted without change)	
66	19 September 1980	66	15 February 1979
67	19 September 1980	67	15 February 1979
68	15 February 1979	(Reprinted without change)	
71	15 February 1979	(Reprinted without change)	
72	19 September 1980	72	15 February 1979
73	19 September 1980	73	15 February 1979
74	15 February 1979	(Reprinted without change)	
75	15 February 1979	(Reprinted without change)	
76	19 September 1980	76	15 February 1979
77	19 September 1989	77	15 February 1979
78	15 February 1979	(Reprinted without change)	
147	15 February 1979	(Reprinted without change)	
142	19 September 1980	142	15 February 1979
755	19 September 1980	155	15 February 1979

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

NEW PAGE	DATE	SUPERSEDED PAGE	DATE
156	15 February 1979	(Reprinted without change)	
169	19 September 1980	169	15 February 1979
170	15 February 1979	(Reprinted without change)	
171	19 September 1980	171	15 February 1979
172	19 September 1980	172	15 February 1979
173	19 September 1980	173	15 February 1979
174	19 September 1980	174	15 February 1979
175	19 September 1980	175	15 February 1979
176	19 September 1980	176	15 February 1979
177	19 September 1980	177	15 February 1979
178	19 Septemer 1980	178	15 February 1979
179	19 September 1980	179	15 February 1979
180	15 February 1979	(Reprinted without change)	
181	19 September 1980	181	15 February 1979

2. THE FOLLOWING PAGES HAVE BEEN ADDED:

NEW PAGE	DATE	NEW PAGE	DATE
10a	19 September 1980	166a	19 September 1980
10b	19 September 1980	166b	19 September 1980
10c	19 September 1980	169a	19 September 1980
29a	19 September 1980	169b	19 September 1980
29b	19 September 1980	169c	19 September 1980
73a	19 September 1980	169d	19 September 1980
73b	19 September 1980	169e	19 September 1980
73c	19 September 1980	169f	19 September 1980
73d	19 September 1980	169g	19 September 1980
73e	19 September 1980	169h	19 September 1980
73f	19 September 1980	169i	19 September 1980
142a	19 September 1980	169j	19 September 1980
142b	19 September 1980	169k	19 September 1980
142c	19 September 1980	1691	19 September 1980
155a	19 September 1980	178a	19 September 1980
155b	19 September 1980	178b	19 September 1980
		178c	19 September 1980

3. RETAIN THIS NOTICE PAGE AND INSERT BEFORE THE TABLE OF CONTENTS.

4. Holders of DOD-STD-35-25A(MI) will verify that page changes and additions indicated above have been entered. The notice page will be retained as a check sheet. This issuance, together with appended pages is a separate publication. Each notice is to be retained by stocking points until the Military Standard is completely revised or canceled.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

Custodians:
Army - MI

Review activities:
Army - AT
Army - AV
Army - ER
Army - ME
Army - MR
Army - SG
Army - CR

User activity:
Army - AR

Preparing activity:
Army - MI

(Project EDS-A312)

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:54Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES

CODE	COLUMN HEADING
3500	FULL LOAD INSERTION LOSS AT 1KHZ (DECIBELS)
3501	FULL LOAD INSERTION LOSS AT 3KHZ (DECIBELS)
3502	FULL LOAD INSERTION LOSS AT 4KHZ (DECIBELS)
3503	FULL LOAD INSERTION LOSS AT 5KHZ (DECIBELS)
3504	FULL LOAD INSERTION LOSS AT 10KHZ (DECIBELS)
3505	FULL LOAD INSERTION LOSS AT 14KHZ (DECIBELS)
3506	FULL LOAD INSERTION LOSS AT 15KHZ (DECIBELS)
3507	FULL LOAD INSERTION LOSS AT 30KHZ (DECIBELS)
3508	FULL LOAD INSERTION LOSS AT 50KHZ (DECIBELS)
3509	FULL LOAD INSERTION LOSS AT 75KHZ (DECIBELS)
3510	FULL LOAD INSERTION LOSS AT 100KHZ (DECIBELS)
3511	FULL LOAD INSERTION LOSS AT 120KHZ (DECIBELS)
3512	FULL LOAD INSERTION LOSS AT 150KHZ (DECIBELS)
3513	FULL LOAD INSERTION LOSS AT 200HZ (DECIBELS)
3514	FULL LOAD INSERTION LOSS AT 300KHZ (DECIBELS)
3515	FULL LOAD INSERTION LOSS AT 500KHZ (DECIBELS)
3516	FULL LOAD INSERTION LOSS AT 600KHZ (DECIBELS)
3517	FULL LOAD INSERTION LOSS AT 1MHZ (DECIBELS)
3518	FULL LOAD INSERTION LOSS AT 2MHZ (DECIBELS)
3519	FULL LOAD INSERTION LOSS AT 3MHZ (DECIBELS)
3520	FULL LOAD INSERTION LOSS AT 5MHZ (DECIBELS)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES. (CONT)

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
3521	FULL LOAD INSERTION LOSS AT 10MHZ (DECIBELS)	3522	FULL LOAD INSERTION LOSS AT 20MHZ (DECIBELS)	3523	FULL LOAD INSERTION LOSS AT 25MHZ (DECIBELS)
3524	FULL LOAD INSERTION LOSS AT 30MHZ (DECIBELS)	3525	FULL LOAD INSERTION LOSS AT 40MHZ (DECIBELS)	3526	FULL LOAD INSERTION LOSS AT 50MHZ (DECIBELS)
3527	FULL LOAD INSERTION LOSS AT 10OMHZ (DECIBELS)	3528	FULL LOAD INSERTION LOSS AT 200MHZ (DECIBELS)	3529	FULL LOAD INSERTION LOSS AT 300MHZ (DECIBELS)
3530	FULL LOAD INSERTION LOSS AT 400MHZ (DECIBELS)	3531	FULL LOAD INSERTION LOSS AT 500MHZ (DECIBELS)	3532	FULL LOAD INSERTION LOSS AT 600MHZ (DECIBELS)
3533	FULL LOAD INSERTION LOSS AT 850MHZ (DECIBELS)	3534	FULL LOAD INSERTION LOSS AT 1GHZ (DECIBELS)	3535	FULL LOAD INSERTION LOSS AT 2GHZ (DECIBELS)
3536	FULL LOAD INSERTION LOSS AT 5GHZ (DECIBELS)	3537	FULL LOAD INSERTION LOSS AT 10GHZ (DECIBELS)	2000	NO LOAD INSERTION LOSS AT 1KHZ (DECIBELS)
2001	NO LOAD INSERTION LOSS AT 3KHZ (DECIBELS)	2002	NO LOAD INSERTION LOSS AT 4KHZ (DECIBELS)	2093	NO LOAD INSERTION LOSS AT 5KHZ (DECIBELS)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES (CONT)

CODE	COLUMN HEADING
2004	NO LOAD INSERTION LOSS AT 10KHZ (DECIBELS)
2005	NO LOAD INSERTION LOSS AT 14KHZ (DECIBELS)
2006	NO LOAD INSERTION LOSS AT 15KHZ (DECIBELS)
2007	NO LOAD INSERTION LOSS AT 30KHZ (DECIBELS)
2008	NO LOAD INSERTION LOSS AT 50KHZ (DECIBELS)
2009	NO LOAD INSERTION LOSS AT 75KHZ (DECIBELS)
2010	NO LOAD INSERTION LOSS AT 1OOKHZ (DECIBELS)
2011	NO LOAD INSERTION LOSS AT 120KHZ (DECIBELS)
2012	NO LOAD INSERTION LOSS AT 150KHZ (DECIBELS)
2013	NO LOAD INSERTION LOSS AT 200KHZ (DECIBELS)
2014	NO LOAD INSERTION LOSS AT 300KHZ (DECIBELS)
2015	NO LOAD INSERTION LOSS AT 500KHZ (DECIBELS)
2016	NO LOAD INSERTION LOSS AT 600KHZ (DECIBELS)
2017	NO LOAD INSERTION LOSS AT 1MHZ (DECIBELS)
2018	NO LOAD INSERTION LOSS AT 2MHZ (DECIBELS)
2019	NO LOAD INSERTION LOSS AT 3MHZ (DECIBELS)
2020	NO LOAD INSERTION LOSS AT 5MHZ (DECIBELS)
2021	NO LOAD INSERTION LOSS AT 10MHZ (DECIBELS)
2022	NO LOAD INSERTION LOSS AT 20MHZ (DECIBELS)
2023	NO LOAD INSERTION LOSS AT 25MHZ (DECIBELS)
2024	NO LOAD INSERTION LOSS AT 30MHZ (DECIBELS)

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION - Candidates - (CONT)

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
2025	NO LOAD INSERTION LOSS AT 40MHZ (DECIBELS)	2026	NO LOAD INSERTION LOSS AT 50MHZ (DECIBELS)	2027	NO LOAD INSERTION LOSS AT 1OOMHZ (DECIBELS)
2028	NO LOAD INSERTION LOSS AT 200MHZ (DECIBELS)	2029	NO LOAD INSERTION LOSS AT 300MHZ (DECIBELS)	2030	NO LOAD INSERTION LOSS AT 400MHZ (DECIBELS)
2031	NO LOAD INSERTION LOSS AT 500MHZ (DECIBELS)	2032	NO LOAD INSERTION LOSS AT 600MHZ (DECIBELS)	2033	NO LOAD INSERTION LOSS AT 850MHZ (DECIBELS)
2034	NO LOAD INSERTION LOSS AT 1GHZ (DECIBELS)	2035	NO LOAD INSERTION LOSS AT 2GHZ (DECIBELS)	2036	NO LOAD INSERTION LOSS AT 5GHZ (DECIBELS)
2037	NO LOAD INSERTION LOSS AT 1OGHZ (DECIBELS)	1617	CAPACI-TANCE PICOFARADS	1619	CAPACI-TANCE MICRO-FARADS
5046	OPERATING TEMP DEGREES C	5069	MAXIMUM OPERATING TEMP DEGREES C	5068	MINIMUM OPERATING TEMP DEGREES C
7591	MINIMUM CURRENT RATING AMPERES	7594	MAXIMUM CURRENT RATING AMPERES	7597	CURRENT RATING AMPERES

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

TABLE 111. TABULATION__CANDIDATES. (CONT)

CODE	COLUMN __HEADING_	CODE	COLUMN __HEADING_	CODE	COLUMN HEADING
7600	MINIMUM VOLTAGE RATING VOLTS AC	7601	MINIMUM VOLTAGE RATING VOLTS DC	7602	MINIMUM VOLTAGE RATING VOLTS RMS
7610	MAXIMUM VOLTAGE RATING VOLTS DC	7611	MAXIMUM VOLTAGE RATING VOLTS RMS	7618	VOLTAGE RATING VOLTS AC
7619	VOLTAGE RATING VOLTS DC	7620	VOLTAGE RATING VOLTS RMS	7609	MAXIMUM VOLTAGE RATING VOLTS AC

New page

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:54Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1576	THE CLASSIFICATION DESIGNATION SHALL BE 1576 IN ACCORDANCE WITH THE BASE DOCUMENT.
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE : AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE : AUTOMATIC WHEN TABLE IX IS USED,	
METALS	
DISSIMILAR METALS.	7580
DESIGN RELIABILITY	
FAILURE RATE (PERCENT PER 1000 HOURS)	7025
CONFIDENCE LEVEL (PERCENT)	7026
RATING TEMPERATURE (DEGREES CELSIUS)	7029

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

MATERIAL(S)- MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS Necessary)

F i n i s h FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS Necessary)

7580 METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST Corrosion DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

DESIGN RELIABILITY* THE ITEM(S) SHALL BE DESIGNED, USING MATERIALS AND MANUFACTURING PROCESSES CAPABLE OF MEETING THE FOLLOWING CONDITIONS:

7025 THE FAILURE RATE SHALL BE LESS THAN 7025 PER CENT PER 1OOO HOURS.

7026 THE CONFIDENCE LEVEL SHALL BE 7026 PERCENT.

7029 THE DESIGN RELIABILITY SHALL BE AT A TEMPERATURE OF 7029 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN RELIABILITY (CONT)	
ELECTRICAL STRESS (SELECT ONE)	
VOLTAGE (PERCENT OF RATED)	7030
LOAD (PERCENT OF RATED)	7027
POWER (PERCENT OF RATED)	7028

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7030	THE DESIGN RELIABILITY APPLIED VOLTAGE SHALL BE AT 7030 PERCENT OF THE RATED VOLTAGE.
7027	THE DESIGN RELIABILITY APPLIED LOAD SHALL BE AT 7027 PERCENT OF THE RATED LOAD.
7028	THE DESIGN RELIABILITY APPLIED POWER SHALL BE AT 7028 PERCENT OF THE RATED POWER.

New Page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION	
ENCLOSURE (SELECT ONE)	
ENCASED.	1578
ENCAPSULATED.	1580
HERMETICALLY SEALED.	1582
OTHER ____	1584
MOUNTING MEANS (SELECT ONE)	
BRACKET,	1586
THREADED STUD.	1588
THREADED INSERT.	1590
PRINTED CIRCUIT.	1592
THREADED BUSHING.	1594
EYELET.	1596
OTHER ____	1598

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	DESIGN AND CONSTRUCTION.
1578	ENCLOSURE. THE ITEM(S) SHALL BE ENCASED.
1580	ENCLOSURE. THE ITEM(S) SHALL BE ENCAPSULATED.
1582	Enclosure THE ITEM(S) SHALL BE HERMETICALLY SEALED.
1584	Enclosure THE ITEM(S) SHALL BE 1584.
1586	MOUNTING MEANS. THE ITEM(S) SHALL BE MOUNTED BY MEANS OF A BRACKET.
1588	MOUNTING MEANS. THE ITEM(S) SHALL BE MOUNTED BY MEANS OF A THREADED STUD.
1590	MOUNTING MEANS. THE ITEM(S) SHALL BE MOUNTED BY MEANS OF A THREADED INSERT.
1592	MOUNTING MEANS. THE ITEM(S) SHALL BE MOUNTED BY MEANS OF A PRINTED CIRCUIT.
1594	MOUNTING MEANS. THE ITEM(S) SHALL BE MOUNTED BY MEANS OF A THREADED BUSHING.
1596	MOUNTING MEANS. THE ITEM(S) SHALL BE MOUNTED BY MEANS OF AN EYELET.
1598	MOUNTING MEANS. THE ITEM(S) SHALL BE MOUNTED BY MEANS OF 1598.

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
NUMBER OF SECTIONS (CIRCUITS)	
(Q U A N T I T Y)	1600
CIRCUIT CONFIGURATE.ONISELECT ONE)	
L TYPE	1602
PI TYPE.	1604
T TYPE.	1606
OTHER_____	1608
TERMINALS	
PER ILLUSTRATION 060-O1-1, TYPE____ (LETTER)	1603
OTHER ____	1605
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(O U N C E S)	7022
(POUNDS)	7023

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
1600	NUMBER OF SECTIONS (CIRCUITS).	THERE SHALL BE 1600 SECTION(S) (CIRCUIT(S)).
1602	CIRCUIT CONFIGURATION.	THE CIRCUIT CONFIGURATION SHALL BE L TYPE.
1604	CIRCUIT CONFIGURATION-PI TYPE,	THE CIRCUIT CONFIGURATION SHALL BE
1606	CIRCUIT CONFIGURATION.	THE CIRCUIT CONFIGURATION SHALL BE T TYPE.
1608	CIRCUIT CONFIGURATION.	THE CIRCUIT CONFIGURATION SHALL BE 1608.
	TERMINALS.	
1603	TERMINALS SHALL BE IN ACCORDANCE WITH ILLUSTRATION 060-01-1, TYPE 1603.	
1605	1605.	
7022	MAXIMUM WEIGHT PER UNIT.	THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT.	THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MAXIMUM WEIGHT PER UNIT (CONT)	
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
NOMINAL WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6996
(POUNDS)	6997
SI (SELECT ONE)	
(GRAMS)	6998
(KILOGRAMS)	6999

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1618	THE LIMIT OF ERROR OF THE MEASURING APPARATUS SHALL BE 1618 PERCENT.
1620	THE TEST VOLTAGE SHALL BE 1620 VOLTS, DC.
1622	THE PERIOD OF UNINTERRUPTED VOLTAGE SHALL BE NOT GREATER THAN 1622 SECONDS.
1624	POINT(S) OF MEASUREMENT SHALL BE 1624.
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF 0FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).
4901	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CHARACTERISTIC NAME	
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 301.	6300
ALTITUDE PER METHOD 105 OF MIL-STD-202	
*TEST CONDITION (LETTER)	4886
TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	6311
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	6312
BETWEEN MUTUALLY INSULATED PARTS.	6292
BETWEEN ALL INSULATED PARTS AND GROUND.	6293
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	6294
OTHER _____	2500
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH

6300 DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.

4886 ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.

4885 TEST VOLTAGE SHALL BE 4885 VOLTS, DC.

4849 TEST VOLTAGE SHALL BE 4849 VOLTS, AC.

POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:

6311 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.

6312 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.

6292 BETWEEN MUTUALLY INSULATED PARTS.

6293 BETWEEN ALL INSULATED PARTS AND GROUND.

6294 BETWEEN CURRENT CARRYING PARTS AND THE CASE.

2500 POINTS OF APPLICATION OF TEST VOLTAGE SHALL BE 2500.

4859 SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MOUNTING PER DOCUMENT (DOC DES)	6280
REGULATION OF TEST VOLTAGE (PERCENT)	6308
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4900
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4902
(MILLIAMPERES)	6310
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM CURRENT LEAKAGE MILLIAMPERE(S)	4875
REMAIN WITHIN SPECIFIED TOLERANCE.	4847

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).
6280	MOUNTING SHALL BE IN ACCORDANCE WITH 6280.
6308	REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.
4900	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4900 KILOVOLTAMPERE (S).
4902	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 Ampere
6310	THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S).
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).
4847	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-202, METHOD 301.	4862
TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4848
BETWEEN MUTUALLY INSULATED PARTS.	4844
BETWEEN ALL INSULATED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	4846
OTHER ____	2501
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH

4861 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.

4862 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.

4854 TEST VOLTAGE SHALL BE 4854 VOLTS, DC.

4855 TEST VOLTAGE SHALL BE 4855 VOLTS, AC.

POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:

4842 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.

4848 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.

4844 BETWEEN MUTUALLY INSULATED PARTS.

4845 BETWEEN ALL INSULATED PARTS AND GROUND.

4846 BETWEEN CURRENT CARRYING PARTS AND THE CASE.

2501 POINTS OF APPLICATION OF TEST VOLTAGE SHALL BE 2501.

4850 SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.

4867 DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
MOUNTING PER DOCUMENT (DOC DES)	5000
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267
DISCRIMINATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1626
PER ELECTRICAL CHARACTERISTICS TABLE.	1628
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1630

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OF PHYSICAL DAMAGE.
4815	THERE SHALL BE NO DEGRADATION OF Performance
4791	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
11477	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE IS PERFORMED.
4795	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4795 MEGOHM(S) AT HIGH HUMIDITY.
4805	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4805 MEGOHM(S) AFTER DRYING.
4813	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4813 MILLIAMPERE(S) AT HIGH HUMIDITY.
4803	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4803 MILLIAMPERE(S) AFTER DRYING.
4768	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE EASE DOCUMENT, EXCEPT 4788.

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 103.	4853
TEST CONDITION (LETTER)	4890
POLARIZING VOLTAGE (VOLTS, DC)	4793
DURATION OF POLARIZING VOLTAGE APPLICATION (HOURS)	4790
POINTS OF APPLICATION OF POLARIZING VOLTAGE:	
BETWEEN MUTUALLY INSULATED PARTS.	4969
BETWEEN ALL INSULATED PARTS AND GROUND.	4970
BETWEEN CURRENT CARRYING PARTS AND CASE.	4971
BETWEEN CURRENT CARRYING PARTS AND GROUND.	6202
OTHER ____	2502
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	6207
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	6206

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4853	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 103 OF MIL-STD-202.
4890	TEST CONDITION LETTER 4890 SHALL APPLY.
4793	MAGNITUDE OF THE POLARIZING VOLTAGE SHALL BE 4793 VOLTS, DC.
4790	DURATION OF APPLICATION OF VOLTAGE SHALL BE 4790 HOUR(S).
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4969	BETWEEN MUTUALLY INSULATED PARTS.
4970	BETWEEN ALL INSULATED PARTS AND GROUND.
4971	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
6202	BETWEEN CURRENT CARRYING PARTS AND GROUND.
2502	2502.
6207	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AT HIGH HUMIDITY.
6206	DIELECTRIC WITHSTANDING VOLTAGE TEST 'SHALL BE PERFORMED AFTER DRYING.

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT.	4819
NO EVIDENCE OF PHYSICAL DAMAGE.	4820
REMAIN WITHIN SPECIFIED TOLERANCE.	4822
MINIMUM INSULATION RESISTANCE (MEGOHMS)	4825
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENTS EXCEPT ____	4809
PER MIL-STD-202, METHOD 104.	4810
*TEST CONDITION (LETTER)	4811
MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4812
TIME BEFORE MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4814
IMPEDANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT __	1678
PER ELECTRICAL CHARACTERISTICS TABLE.	1680

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1682	IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1682.
1684	IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-18327.
11686	INSERTION LOSS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1686.
1688	INSERTION LOSS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE ELECTRICAL CHARACTERISTICS TABLE.

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSERTION LOSS (CONT)	
REQUIREMENTS (CONT)	
PER INSERTION LOSS TABLE(S).	
INSERTION LOSS (NO LOAD)	2994

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

INSERTION LOSS. THE REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE FOLLOWING TABLE(S).

2994 THE INSERTION LOSS (NO LOAD) SHALL BE IN ACCORDANCE WITH THE INSERTION LOSS (NO LOAD) TABLE.

INSERTION LOSS (NO LOAD) TABLE

FREQUENCY	DB	_DB_	DB	_DB_	DB	DB	DB	_DB_
1 KILOHERTZ	2000	2050	2100	2150	2200	2250	2300	2350
3 KILOHERTZ	2001	2051	2101	2151	2201	2251	2301	2351
4 KILOHERTZ	2002	2052	2102	2152	2202	2252	2302	2352
5 KILOHERTZ	2003	2053	2103	2153	2203	2253	2303	2353
10 KILOHERTZ	2004	2054	2104	2154	2204	2254	2304	2354
14 KILOHERTZ	2005	2055	2105	2155	2205	2255	2305	2355
25 KILOHERTZ	2006	2056	2106	2156	2206	2256	2306	2356
30 KILOHERTZ	2007	2057	2107	2157	2207	2257	2307	2357
50 KILOHERTZ	2008	2058	2108	2158	2208	2258	2308	2358
75 KILOHERTZ	2009	2059	2109	2159	2209	2259	2309	2359
100 KILOHERTZ	2010	2060	2110	2160	2210	2260	2310	2360
120 KILOHERTZ	2011	2061	2111	2161	2211	2261	2311	2361
150 KILOHERTZ	2012	2062	2112	2162	2212	2262	2312	2362
200 KILOHERTZ	2013	2063	2113	2163	2213	2263	2313	2363
300 KILOHERTZ	2014	2064	2114	2164	2214	2264	2314	2364
500 KILOHERTZ	2015	2065	2115	2165	2215	2265	2315	2365
600 KILOHERTZ	2016	2066	2116	2166	2216	2266	2316	2366
1 MEGAHERTZ	2017	2067	2117	2167	2217	2267	2317	2367
2 MEGAHERTZ	2018	2068	2118	2168	2218	2268	2318	2368
3 MEGAHERTZ	2019	2069	2119	2169	2219	2269	2319	2369
5 MEGAHERTZ	2020	2070	2120	2170	2220	2270	2320	2370
10 MEGAHERTZ	2021	2071	2121	2171	22211	2271	2321	2371
20 MEGAHERTZ	2022	2072	2122	2172	2222	2272	2322	2372
25 MEGAHERTZ	2023	2073	2123	2173	2223	2273	2323	2373
30 MEGAHERTZ	2024	2074	2124	2174	2224	2274	2324	2374
40 MEGAHERTZ	2025	2075	2125	2175	2225	2275	2325	2375

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSERTION LOSS (CONT)	
INSERTION LOSS (NO LOAD) (CONT)	

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

INSERTION LOSS (NO LOAD) TABLE (CONT)

FREQUENCY	DB	DB	DB	DB	DB	DB	DB	DB
50 MEGAHERTZ	2026	2076	2126	2176	2226	2276	2326	2376
1OO MEGAHERTZ	2027	2077	2127	2177	2227	2277	2327	2377
200 MEGAHERTZ	2028	2078	2128	2178	2228	2278	2328	2378
300 MEGAHERTZ	2029	2079	2129	2179	2229	2279	2329	2379
400 MEGAHERTZ	2030	2080	2130	2180	2230	2280	2330	2380
500 MEGAHERTZ	2031	2081	2131	2181	2231	2281	2331	2381
600 MEGAHERTZ	2032	2082	2132	2182	2232	2282	2332	2382
850 MEGAHERTZ	2033	2083	2133	2183	2233	2283	2333	2383
1 GIGAHERTZ	2034	2084	2134	2184	2234	2284	2334	2384
2 GIGAHERTZ	2035	2085	2135	2185	2235	2285	2335	2385
5 GIGAHERTZ	2036	2086	2136	2186	2236	2286	2336	2386
10 GIGAHERTZ	2037	2087	2137	2187	2237	2287	2337	2387
1900	2038	2088	2138	2188	2238	2288	2338	2388
1901	2039	2089	2139	2189	2239	2289	2339	2389
1902	2040	2090	2140	2190	2240	2290	2340	2390
1903	2041	2091	2141	2191	2241	2291	2341	2391
1904	2042	2092	2142	2192	2242	2292	2342	2392
1905	2043	2093	2143	2193	2243	2293	2342	2393
1906	2044	2094	2144	2194	2244	2294	2344	2394
1907	2045	2095	2145	2195	2245	2295	2345	2395
1908	2046	2096	2146	2196	2246	2296	2346	2396
1909	2047	2097	2147	2197	2247	2297	2347	2397

NOTE A: 1981.

NOTE B: 1982.

NOTE C: 1983.

NOTE D: 1984.

NOTE E: 1985.

NOTE F: 1986.

NOTE G: 1987.

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSERTION LOSS (CONT)	
PER INSERTION LOSS TABLE(S) (CONT)	
INSERTION LOSS (FULL LOAD)	2995

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2995 THE INSERTION LOSS (FULL LOAD) SHALL BE IN ACCORDANCE WITH THE INSERTION LOSS (FULL LOAD) TABLE.

INSERTION LOSS (FULL LOAD) TABLE

FREQUENCY	DB	DB	DB	DB	DB	DB	DB	DB
1 KILOHERTZ	3500	3550	3600	3700	3750	3800	3850	3900
3 KILOHERTZ	3501	3551	3601	3701	3751	3801	3851	3901
4 KILOHERTZ	3502	3552	3602	3702	3752	3802	3852	3902
5 KILOHERTZ	3503	3553	3603	3703	3753	3803	3853	3903
10 KILOHERTZ	3504	3554	3604	3704	3754	3804	3854	3904
14 KILOHERTZ	3505	3555	3605	3705	3755	3805	3855	3905
15 KILOHERTZ	3506	3556	3606	3706	3756	3806	3856	3906
30 KILOHERTZ	3507	3557	3607	3707	3757	3807	3857	3907
50 KILOHERTZ	3508	3558	3608	3708	3758	3808	3858	3908
75 KILOHERTZ	3509	3559	3609	3709	3759	3809	3859	3909
100 KILOHERTZ	3510	3560	3610	3710	3760	3810	3860	3910
120 KILOHERTZ	3511	3561	3611	3711	3761	3811	3861	3911
150 KILOHERTZ	3512	3562	3612	3712	3762	3812	3862	3912
200 KILOHERTZ	3513	3563	3613	3713	3763	3813	3863	3913
300 KILOHERTZ	3514	3564	3614	3714	3764	3814	3864	3914
500 KILOHERTZ	3515	3565	3615	3715	3765	3815	3865	3915
600 KILOHERTZ	3516	3566	3616	3716	3766	3816	3866	3916
1 MEGAHERTZ	3517	3567	3617	3717	3767	3817	3867	3917
2 MEGAHERTZ	3518	3568	3618	3718	3768	3818	3868	3918
3 MEGAHERTZ	3519	3569	3619	3719	3769	3819	3869	3919
5 MEGAHERTZ	3520	3570	3620	3720	3770	3820	3870	3920
10 MEGAHERTZ	3521	3571	3621	3721	3771	3821	3871	3921
20 MEGAHERTZ	3522	3572	3622	3722	3772	3822	3872	3922
25 MEGAHERTZ	3523	3573	3623	3723	3773	3823	3873	3923
30 MEGAHERTZ	3524	3574	3624	3724	3774	3824	3874	3924
40 MEGAHERTZ	3525	3575	3625	3725	3775	3825	3875	3925
50 MEGAHERTZ	3526	3576	3626	3726	3776	3826	3876	3926
1OO MEGAHERTZ	3527	3577	3627	3727	3777	3827	3877	3927
200 MEGAHERTZ	3528	3578	3628	3728	3778	3828	3878	3928
300 MEGAHERTZ	3529	3579	3629	3729	3779	3829	3879	3929
400 MEGAHERTZ	3530	3580	3630	3730	3780	3830	3880	3930

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSERTION LOSS (CONT)	
INSERTION LOSS (FULL LOAD) (CONT)	

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

INSERTION LOSS (FULL LOAD) TABLE (CONT)

FREQUENCY	_DB_	_DB_	_DB_	DB	_DB_	_DB_	_DB_	_DB_
500 MEGAHERTZ	3531	3581	3631	3731	3781	3831	3881	3931
600 MEGAHERTZ	3532	3582	3632	3732	3782	3832	3882	3932
850 MEGAHERTZ	3533	3583	3633	3733	3783	3833	3883	3933
1 GIGAHERTZ	3534	3584	3634	3734	3784	3834	3884	3934
2 GIGAHERTZ	3535	3585	3635	3735	3785	3835	3885	3935
5 GIGAHERTZ	3536	3586	3636	3736	3786	3836	3886	3936
110 GIGAHERTZ	3537	3587	3637	3737	3787	3837	3887	3937
1930	3538	3588	3638	3738	3788	3838	3888	3938
1931	3539	3589	3639	3739	3789	3839	3889	3939
1932	3540	3590	3640	3740	3790	3840	3890	3940
1933	3541	3591	3641	3741	3791	3841	3891	3941
1934	3542	3592	3642	3742	3792	3842	3892	3942
1935	3543	3593	3643	3743	3793	3843	3893	3943
1936	3544	3594	3644	3744	3794	3844	3894	3944
1937	3545	3595	3645	3745	3795	3845	3895	3945
1938	3546	3596	3646	3746	3796	3846	3896	3946
1939	3547	3597	3647	3747	3797	3847	3897	3947

NOTE A: 1991.

NOTE B: 1920.

NOTE C: 1993.

NOTE D: 1994.

NOTE E: 1995.

NOTE F: 1996.

NOTE G: 1997.

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSERTION LOSS (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	1692
PER DOCUMENT (DOC DES)	1694
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ,_	1380
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
REMAIN WITHIN SPECIFIED TOLERANCE.	1388
NO EVIDENCE OF PHYSICAL DAMAGE.	1407

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1692	INSERTION LOSS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1692.
1694	INSERTION LOSS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1694.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE, THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1386	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHM(S).
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.
1388	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER MIL-STD-202, METHOD 302.	1511
CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
POINTS OF MEASUREMENT:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1497
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	1498
BETWEEN MUTUALLY INSULATED PARTS.	1522
BETWEEN INSULATED PARTS AND GROUND.	1523
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	1524
OTHER ____	2503

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
1511	INSULATION Resistance TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.
1378	TEST CONDITION LETTER 1378 SHALL APPLY.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
	POINTS OF INSULATION RESISTANCE MEASUREMENT SHALL BE AS FOLLOWS:
1497	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
1498	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
1522	BETWEEN MUTUALLY INSULATED PARTS.
1523	BETWEEN ALL INSULATED PARTS AND GROUND.
1524	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
2503	2503.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)


CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 3020 (CONT)	
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	1400
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	1396
REMAIN WITHIN SPECIFIED TOLERANCE.	1398
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1394
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	1429
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	1404

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

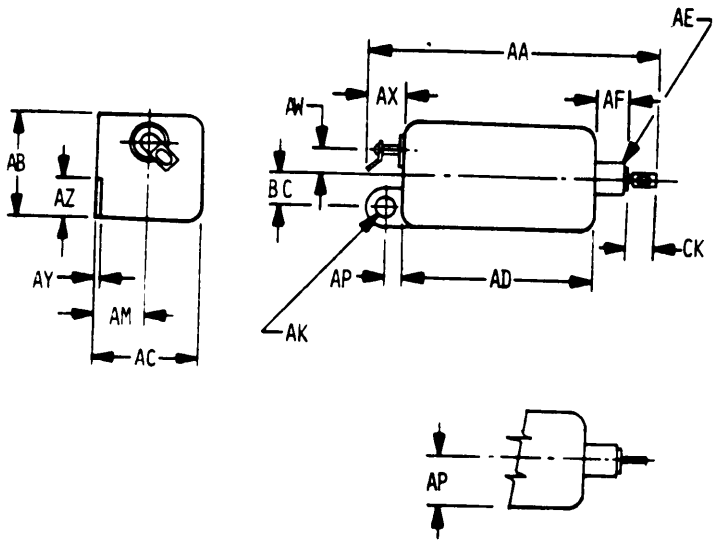


060-02-27

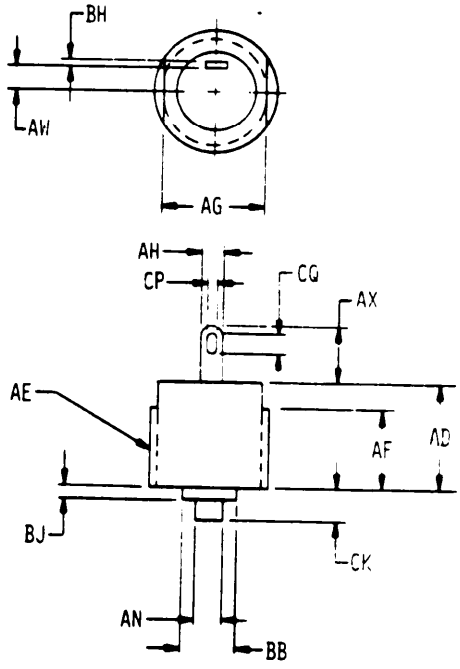

060-02-28

Reprinted without change


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

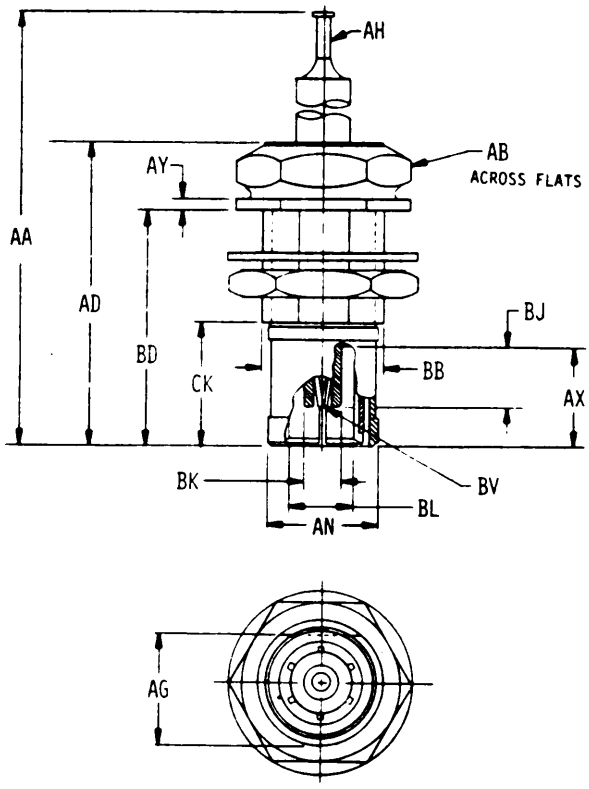

060-02-29

Supersedes page 142 of 15 February 1979


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

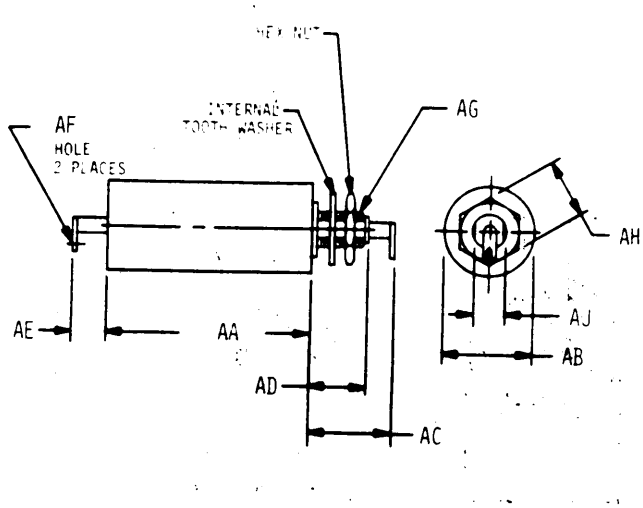

060-02-30

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

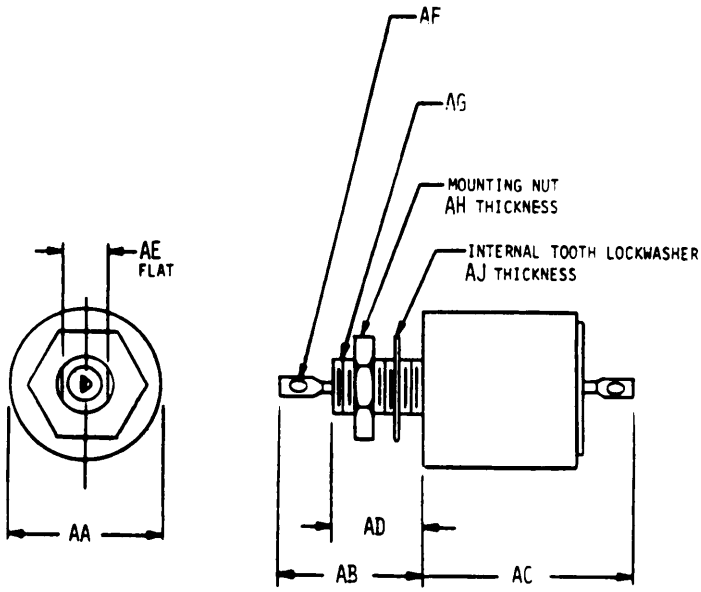

060-02-31

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

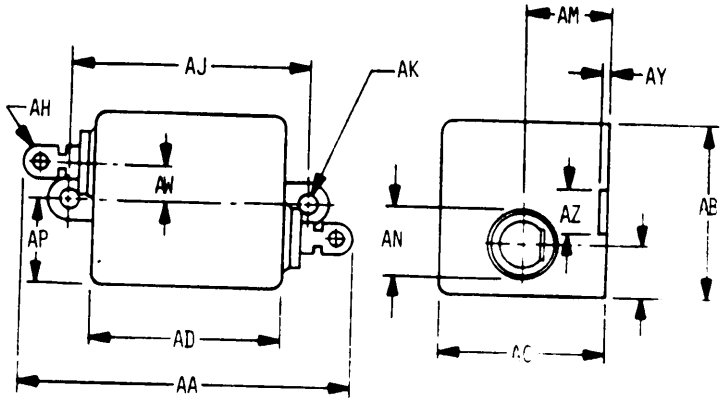


NOTE: TERMINAL END VIEWS ARE DIMENSIONALLY SYMMETRICAL

060-03-1


New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

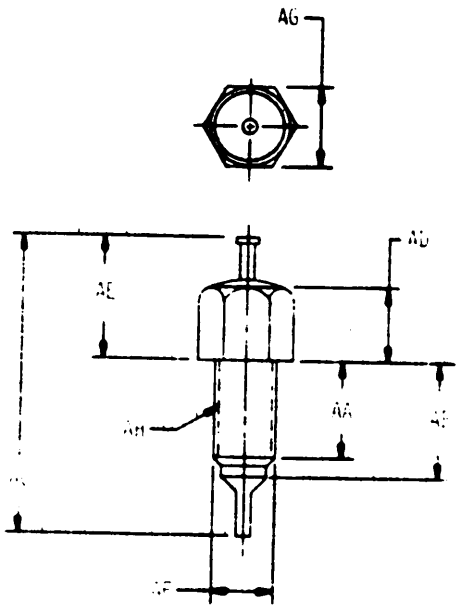

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

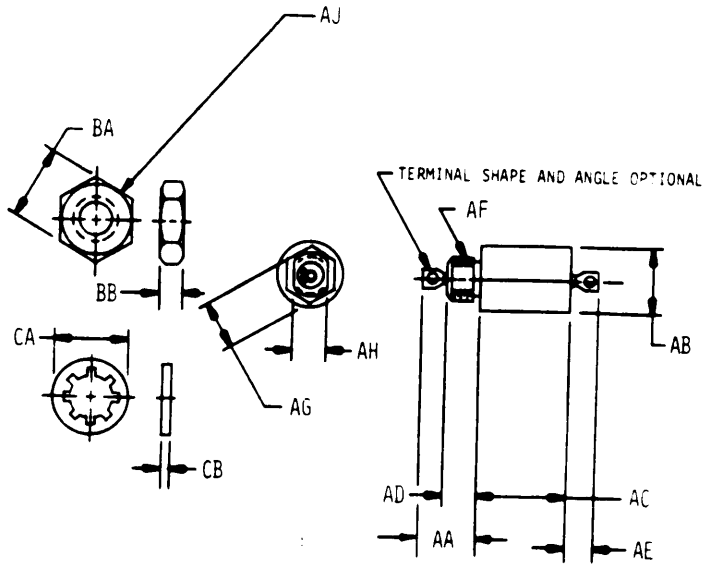


060-07-5

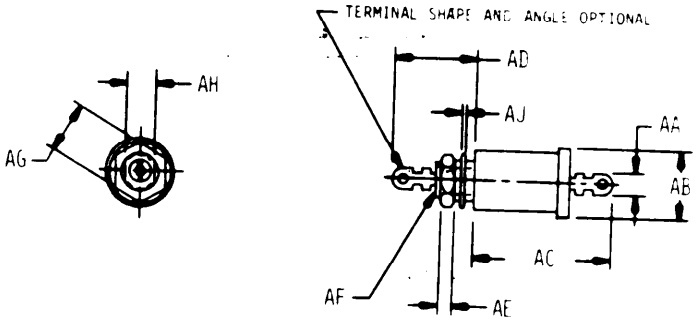

060-07-6

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

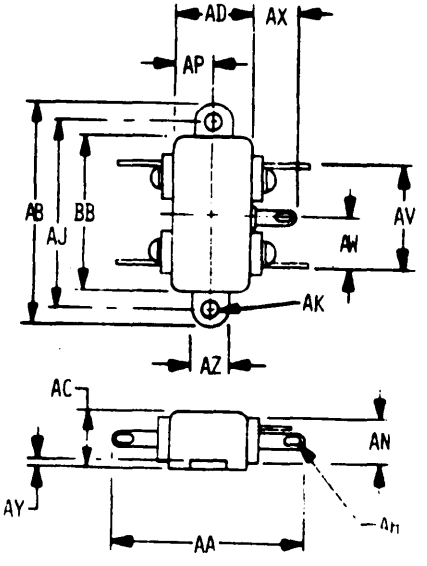


060-08-1


New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

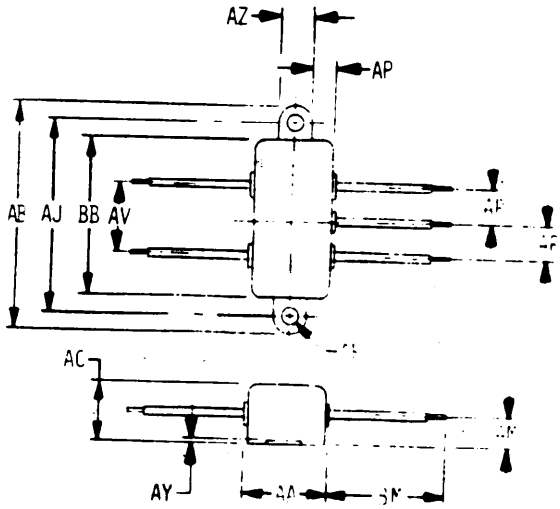

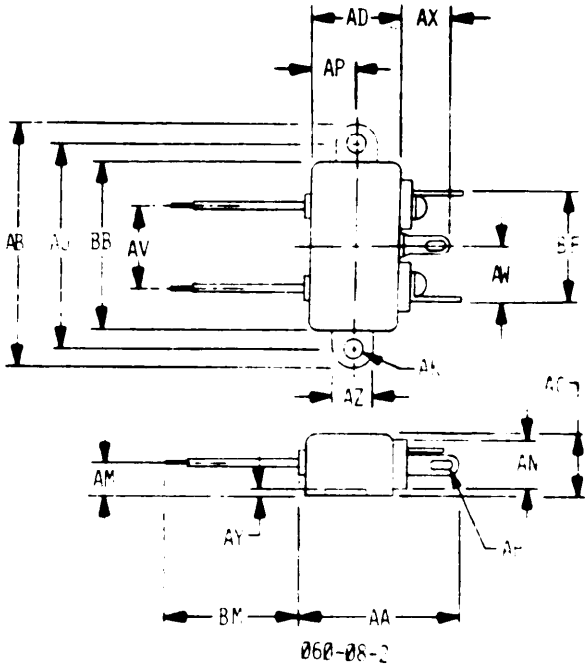


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

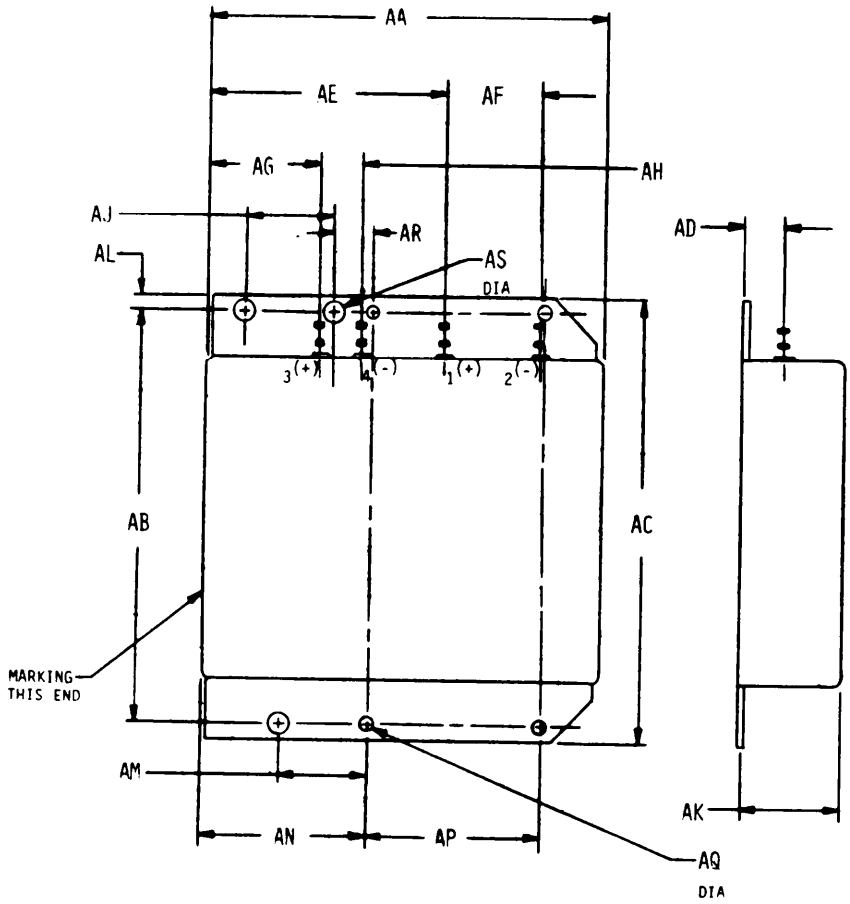

MIL-STD-25

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

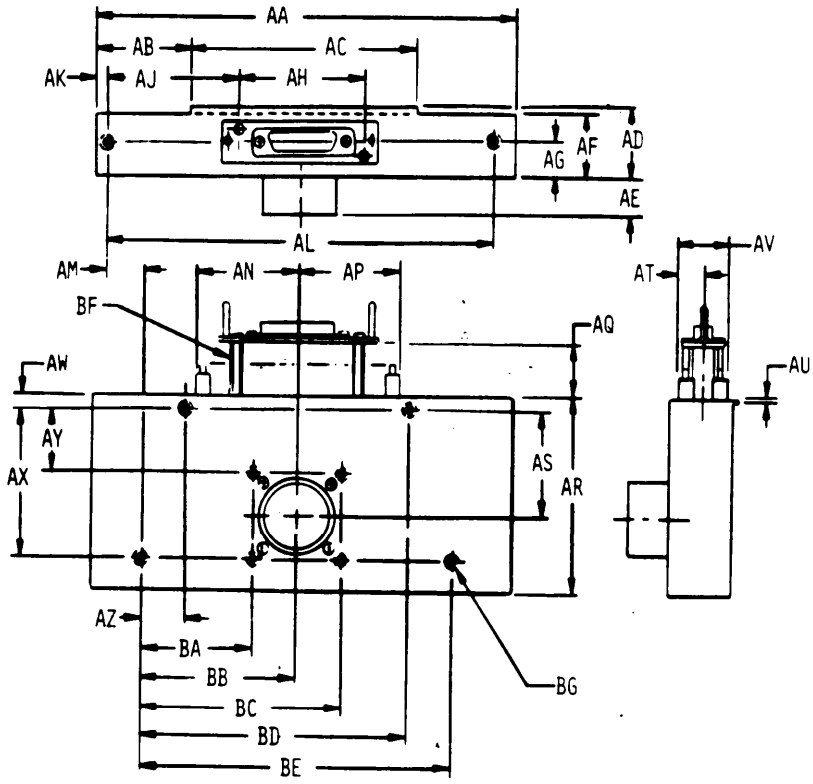

060-08-26


New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

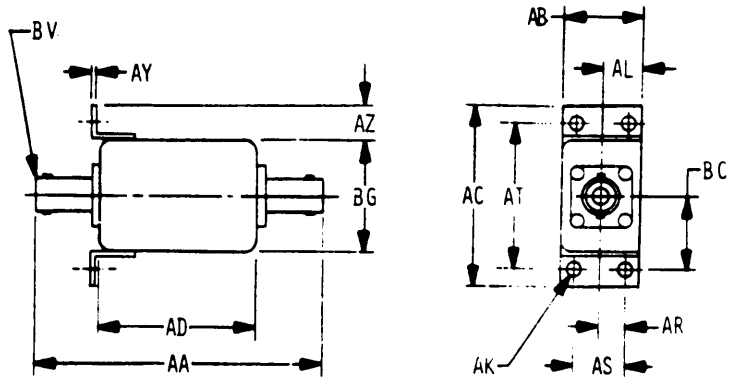


NOTE: TERMINAL END VIEWS ARE DIMENSIONALLY SYMMETRICAL

060-11-2

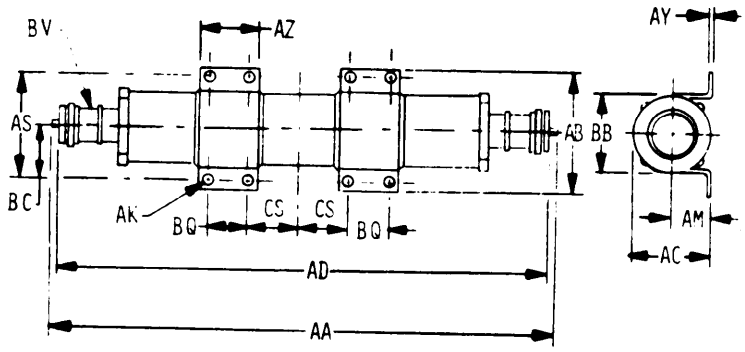

060-11-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

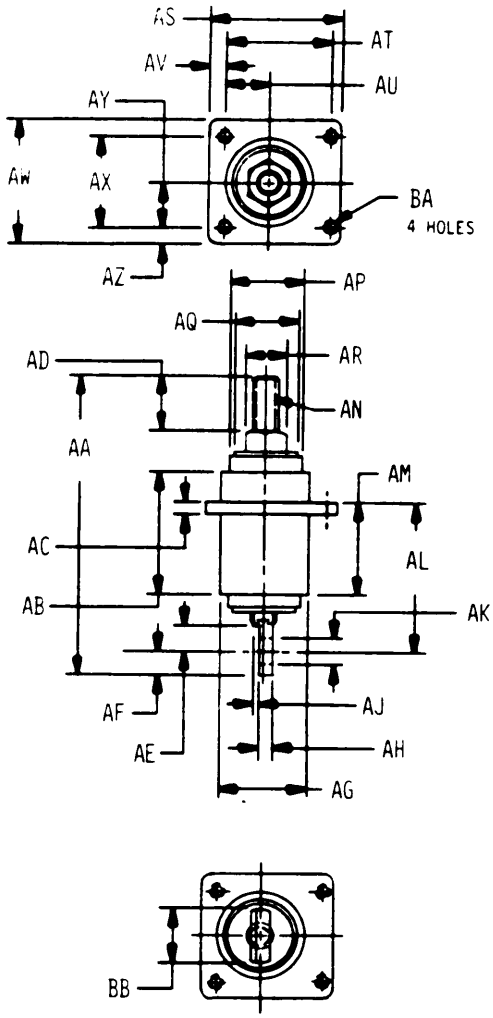

060-11-4

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

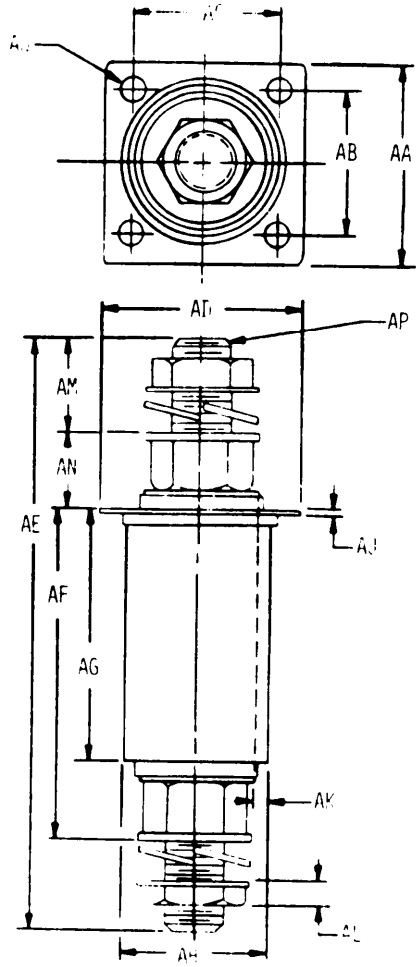

MIL-STD-11-5

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

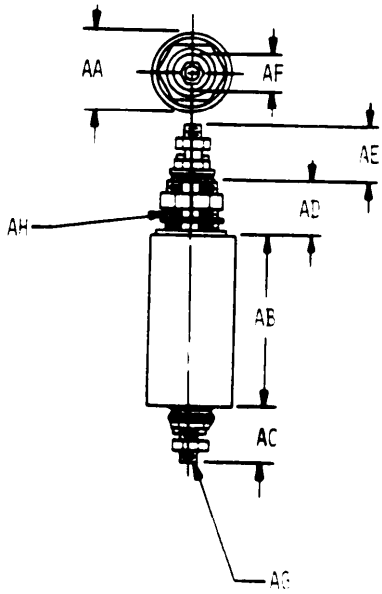

060-11-5

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.




060-12-1

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.




060-12-2

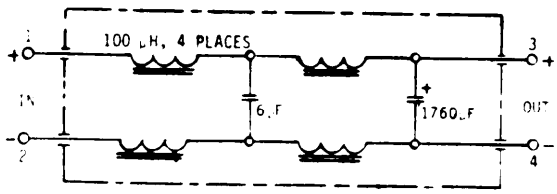

060-12-3

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

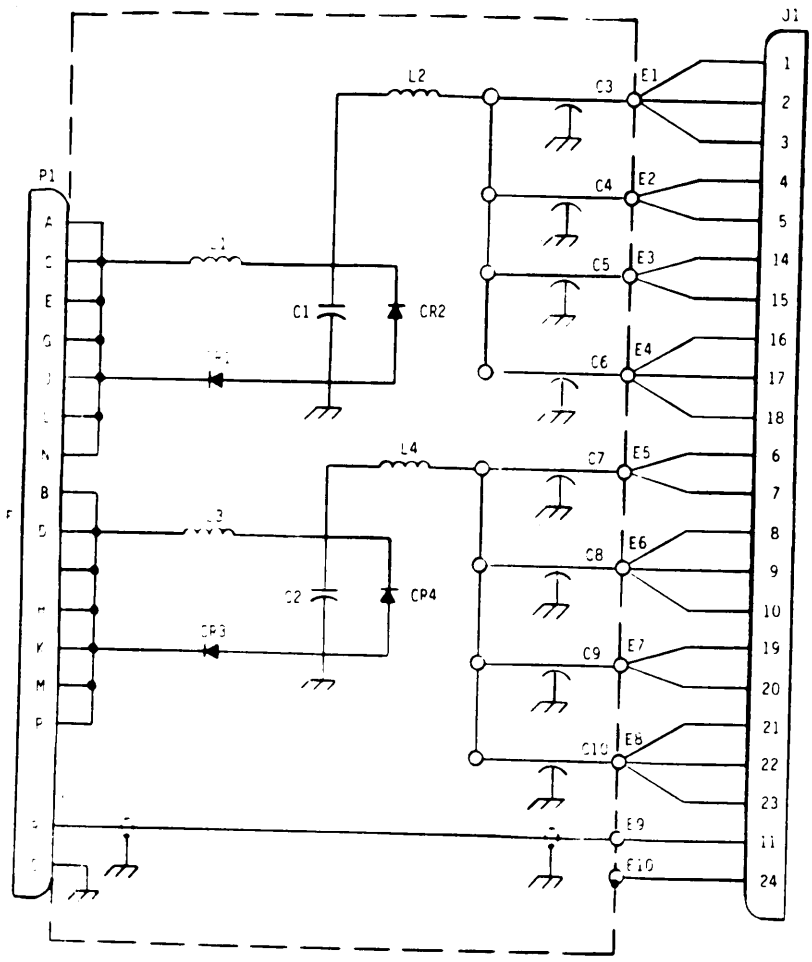

060-12-4

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.



060-12-5

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

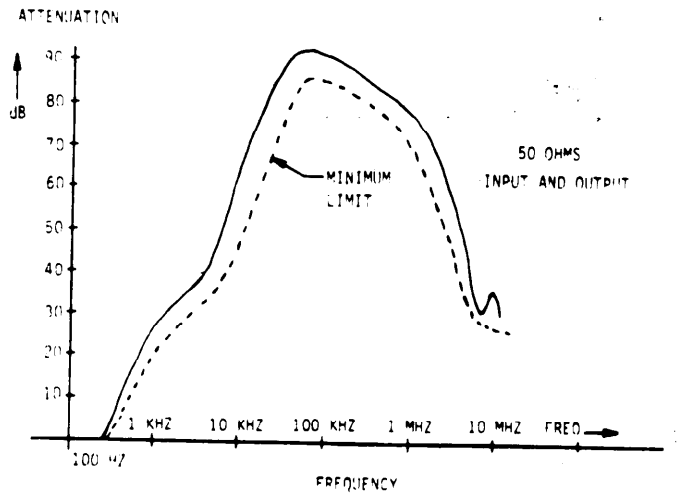


060-13-1

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

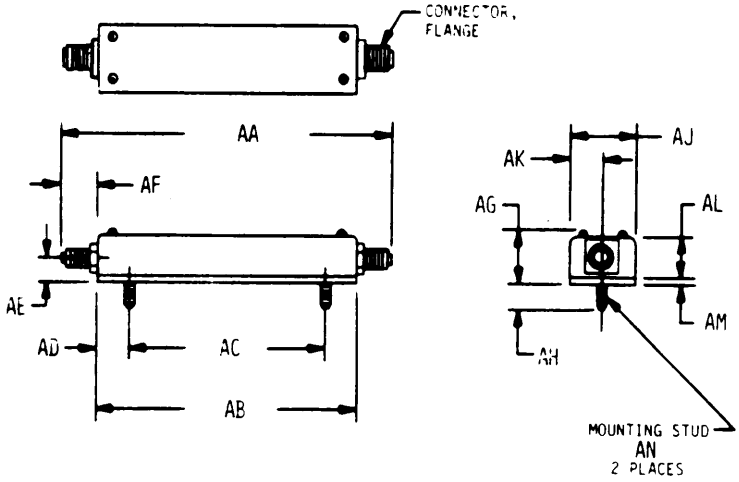


060-20-1

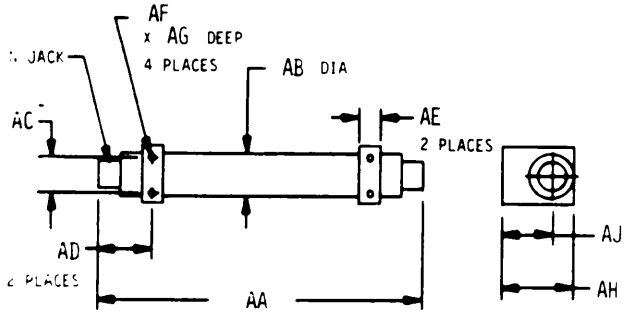

060-20-2

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

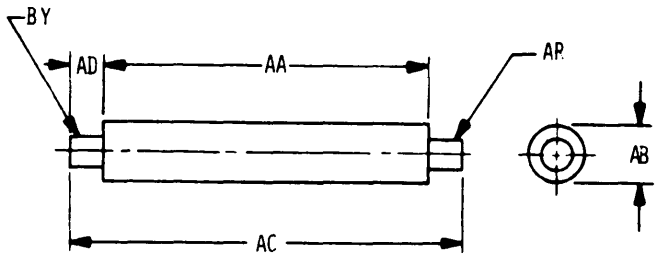

060-20-3

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.



060-25-1

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

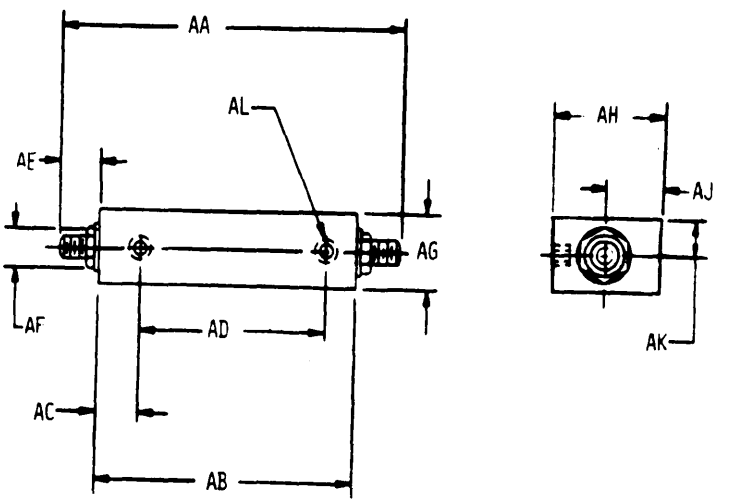

060-30-1

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	12	1410	110	1473	114	1576	30
0102	12	1411	112	1475	116	1580	30
0103	12	1412	112	1476	116	1582	30
0104	12	1413	112	1477	64	1584	30
0105	12	1414	112	1478	100	1586	30
0107	14	1416	112	1480	118	1588	30
0108	14	1418	110	1482	100	1590	30
0700	12	1419	112	1486	100	1592	30
0800	12	1420	112	1488	100	1594	30
1003	12	1421	112	1490	118	1596	30
1004	12	1426	120	1494	100	*1598*	30
1005	12	1427	120	1495	100	1600	32
1006	12	1428	120	1497	76	1602	32
1008	12	1429	78	1498	76	1603	32
1009	26	1430	122	1500	102	1604	32
1371	76	1431	120	1502	102	1605	32
1372	78	1432	80	1504	102	1606	32
1373	78	1433	110	1508	102	1608	32
1374	120	1435	120	1509	102	1609	46
1375	112	1436	120	1511	76	1610	48
1376	76	1438	120	1520	78	1611	46
1377	76	1439	122	1522	76	1012	48
1378	76	1446	114	1523	76	1613	46
1380	74	1447	116	1524	76	1614	48
1381	78	1448	116	1533	116	1615	46
1383	78	1449	80	1534	116	1616	48
1384	74	1451	100	1535	118	1617	46
1386	74	1452	122	1536	118	1618	50
1387	74	1453	122	1537	120	1619	46
1388	74	1455	114	1538	120	1620	50
1391	80	1456	114	1557	44	1621	46
1394	78	1459	122	1558	44	1622	*50*
1395	80	1462	122	1562	24	1023	46
1396	78	1464	100	1564	24	1624	50
1397	80	1466	118	1566	24	1625	46
1398	78	1467	118	1568	24	1626	58
1400	78	1468	102	1570	24	1627	46
1404	78	1469	114	1572	24	1628	58
1406	80	1470	118	1574	24	1629	46
1407	74	1471	102	1576	26	1630	58

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.
1631	46
1632	50
1633	48
1634	50
1635	48
1636	50
1637	48
1638	50
1639	48
1640	60
1641	48
1642	60
1643	48
1644	50
1646	50
1648	60
1650	60
1652	60
1654	80
1656	60
1658	62
1660	62
1662	62
1664	62
1666	62
1668	62
1670	62
1672	62
1674	62
1676	62
1678	68
1680	68
1682	70
1684	70
1686	70
1688	70
1692	74
1694	74
1700	82
1702	82
1704	82
1778	82
1710	82
1712	82
1714	82
1716	82
1718	82
1720	84
1722	84
1724	84
1726	84
1728	84
1730	84
1732	84
1734	84
1736	84
1740	106
1742	106
1744	106
1746	106
1748	106
1750	106
1752	108
1754	108
1756	108
1758	108
1760	108
1762	108
1764	108
1766	108
1768	108
1770	110
1772	110
1774	110
1776	110
1778	110
1780	110
1782	110
1784	110
1786	124
1788	124
1790	124
1792	124
1794	124
1796	124
1800	124
1802	124
1804	124
1806	124
1808	124
1810	126
1812	126
1814	126
1816	126B
1981	73B
1982	73B
1983	73B
1984	73B
1985	73B
1986	73B
1987	73B
1991	73B
1992	73B
1993	73B
1994	73B
1995	73B
1996	73B
1997	73
2000	73
2001	73
2002	73
2003	73
2004	73
2005	73
2006	73
2007	73
2008	73
2009	73
2010	73
2011	73
2012	73
2013	73
2014	73
2015	73
2016	73
2017	73
2018	73
2019	73
2020	73
2021	73
2022	73
2023	73
2004	73
2025	73B
2026	73B
2027	73B
2028	73B
2029	73B
2030	73B
2031	73B
2032	73B
2033	73B
2034	73B
2035	730
2036	73B
2037	73B
2038	73B
2039	739
2040	73B
2041	73B
2042	73B
2043	73B
2044	73B
2045	73B
2046	73B
2047	73
2050	73
2051	73
2052	73
2053	73

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2054	73	2094	73B	2136	73B	2178	73B
2055	73	2095	73B	2137	73B	2175	73B
2056	73	2096	73B	2138	73B	2186	73B
2057	73	2097	73	2139	73B	2181	73B
2058	73	2100	73	2140	73B	2182	73B
2059	73	2101	73	2141	73B	2163	73B
2060	73	2102	73	2142	73B	2184	73B
2061	73	2103	73	2143	73B	2185	73B
2062	73	2104	73	2144	73B	2186	73B
2063	73	2105	73	2145	73B	2187	73B
2064	73	2106	73	2146	73B	2188	73B
2065	73	2107	73	2147	73	2189	73B
2066	73	2108	73	2150	73	2190	73B
2067	73	2109	73	2151	73	2191	73B
2068	73	2110	73	2152	73	2192	73B
2069	73	2111	73	2153	73	2193	73B
2070	73	2112	73	2154	73	2194	73B
2071	73	2113	73	2155	73	2195	73B
2072	73	2114	73	2156	73	2196	73B
2073	73	2115	73	2157	73	2197	73
2074	73	2116	73	2158	73	2200	73
2075	73B	2117	73	2159	73	2201	73
2076	73B	2118	73	2160	73	2202	73
2077	73B	2119	73	2161	73	2203	73
2078	73B	212;	73	2162	73	2204	73
2079	73B	2121	73	2163	73	2205	73
2080	73B	2122	73	2164	73	2206	73
2081	73B	2123	73	2165	73	2207	73
2082	73B	2124	73	2166	73	2208	73
2083	73B	2125	73B	2167	73	2209	73
2084	73B	2126	73B	2168	73	2210	73
2085	73B	2127	73B	2169	73	2211	73
2086	73B	2128	73B	2170	73	2212	73
2087	73B	2129	73B	2171	73	2213	73
2068	73B	2130	73B	2172	73	2214	73
2089	73B	2131	73B	2173	73	2215	73
2090	73B	2132	73B	2174	73	2216	73
2091	73B	2133	73B	2175	73B	2217	73
2092	73B	2134	73B	2176	73B	2218	73
2093	73B	2135	73B	2177	73B	2219	73

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR PAGE	PAGE NO.
2221	73	2263	73	2305	73	2346	73B
2222	73	2264	73	2306	73	2347	73
2223	73	2265	73	2307	73	2350	73
2224	73	2266	73	2308	73	2351	73
2225	73B	2267	73	2309	73	2352	73
2226	73B	2268	73	2310	73	2353	73
2227	73B	2269	73	2311	73	2354	73
2228	73B	2270	73	2312	73	2355	73
2229	73B	2271	73	2314	73	2356	73
2230	73B	2272	73	2315	73	2357	73
2231	73B	2273	73	2316	73	2356	73
2232	73B	2274	73	2317	73	2359	73
2233	73B	2275	73B	2318	73	2360	73
2234	73B	2276	73B	2319	73	2361	73
2235	73B	2277	73B	2320	73	2362	73
2236	73B	2278	73B	2321	73	2363	73
2237	73B	2279	73B	2322	73	2364	73
2238	73B	2280	73B	2323	73	2365	73
2239	73B	2281	73B	2324	73	2366	73
2240	73B	2282	73B	2325	73B	2367	73
2241	73B	2283	73B	2326	73B	2360	73
2242	73B	2284	73B	2327	73B	2369	73
2243	73B	2285	73B	2328	73B	2370	73
2244T	73B	2286	73B	2329	73B	2371	73
2245	73B	2287	73B	2330	73B	2372	73
2246	73B	2288	73B	2331	73B	2373	73
2247	73B	2289	73B	2332	73B	2374	73
2250	73	2290	73B	2333	73B	2375	73B
2251	73	2291	73B	2334	73B	2376	73B
2252	73	2292	73B	2335	73B	2377	736
2253	73	2293	73B	2336	73B	2378	73B
2254	73	2294	73B	2337	73B	2379	73B
2255	73	2295	73B	2338	73B	2380	73B
2256	73	2296	73B	2339	73B	2381	73B
2257	73	2297	73B	2340	73B	2382	73B
2258	73	2300	73B	2341	73B	2383	73B
2259	73	2301	73B	2342	73B	2384	73B
2260	73	2302	73B	2343	73B	2385	73B
2261	73	2303	73B	2344	73B	2386	73B
2262	73	2304	73B	2345	73B	2387	73B

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2388	73B	3024	37	3064	37	3104	37
2389	73B	3025	37	3065	37	3105	37
2390	73B	3026	37	3066	37	3106	37
2391	73B	3027	37	3067	37	3107	37
2392	73B	3028	37	3068	37	3108	37
2393	73B	3029	37	3069	37	3109	37
2394	73B	3030	37	3070	37	3110	37
2395	73B	3031	37	3071	37	3111	37
2396	73B	3032	37	3072	37	3112	37
2397	73	3033	37	3073	37	3113	37
2500	52	3034	37	3074	37	3119	37
2501	56	3035	37	3075	37	3115	37
2502	56	3036	37	3076	37	3116	37
2503	76	3037	37	3077	37	3117	37
2890	73	3038	37	3078	37	3116	37
2923	73	3039	37	3079	37	3119	37
3000	37	3040	37	3080	37	3120	37
3001	37	3041	37	3081	37	3121	37
3002	37	3042	37	3082	37	3122	37
3003	37	3043	37	3083	37	3123	37
3004	37	3044	37	3084	37	3124	39
3005	37	3045	37	3085	37	3125	39
3006	37	3046	37	3086	37	3126	39
3007	37	3047	37	3087	37	3127	39
3008	37	3048	37	3088	37	3128	39
3009	37	3049	37	3089	37	3125	39
3010	37	3050	37	3090	37	3130	39
3011	37	3051	37	3091	37	3131	39
3012	37	3052	37	3092	37	3132	39
3013	37	3053	37	3093	37	3133	39
3014	37	3054	37	3094	37	3134	39
3015	37	3055	37	3095	37	3135	39
3016	37	3056	37	3096	37	3136	39
3017	37	3057	37	3097	37	3137	39
3018	37	3058	37	3098	37	3130	39
3019	37	3059	37	3099	37	3139	39
3020	37	3060	37	3100	37	3140	39
3021	37	3061	37	3101	37	3141	39
3022	37	3062	37	3102	37	3142	39
3023	37	3063	37	3103	37	3143	39

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CODE)

CHAR CODE	PAGE CODE	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3144	39	3184	39	3226	39	3266	41
3145	39	3185	39	3227	39	3267	41
3146	39	3186	39	3228	39	3268	41
3147	39	3187	39	3229	39	3269	41
3148	39	3188	39	3230	39	3270	41
3149	39	3189	39	3231	39	3271	41
3150	39	3190	39	3232	39	3272	41
3151	39	3191	39	3233	39	3273	41
3152	39	3192	39	3234	39	3274	41
3153	39	3193	39	3235	39	3275	41
3154	39	3194	39	3236	39	3276	41
3155	39	3195	39	3237	39	3277	41
3156	39	3196	39	3238	39	3279	41
3157	39	3197	39	3239	39	3279	41
3158	39	3200	39	3240	39	3280	41
3159	39	3201	39	3241	39	3281	41
3160	39	3202	39	3242	39	3282	41
3161	39	3203	39	3243	39	3283	41
3162	39	3204	39	3244	39	3284	41
3163	39	3205	39	3245	39	3265	41
3164	39	3206	39	3246	39	3286	41
3165	39	3207	39	3247	39	3287	41
3166	39	3208	39	3248	39	3288	41
3167	39	3209	39	3249	39	3289	41
3168	39	3210	39	3250	39	3290	41
3169	39	3211	39	3251	39	3291	41
3170	39	3212	39	3252	39	3292	41
3171	39	3213	39	3253	39	3293	41
3172	39	3214	39	3254	39	3294	41
3173	39	3215	39	3255	39	3295	41
3174	39	3216	39	3256	41	3296	41
3175	39	3217	39	3257	41	3297	41
3176	39	3218	39	3258	41	3298	41
3177	39	3219	39	3259	41	3299	41
3178	39	3220	39	3260	41	3300	41
3179	39	3221	39	3261	41	3301	41
3180	39	3222	39	3262	41	3302	41
3181	39	3223	39	3263	41	3303	41
3183	39	3224	39	3264	41	3304	41
3184	39	3225		3265	39	3305	41

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3306	41	3346	41	3386	41	3534	73B
3307	41	3347	41	3387	41	3535	73B
3308	41	3348	41	3388	41	3536	73B
3309	41	3349	41	3389	41	3537	73B
3310	41	3350	41	3390	41	3538	73B
3311	41	3351	41	3391	41D	3539	73B
3312	41	3352	41	3500	73D	3540	73B
3313	41	3353	41	3501	73D	3541	73B
3314	41	3354	41	3502	73D	3542	73B
3315	41	3355	41	3503	73D	3343	73B
3316	41	3356	41	3504	73D	3544	73B
3317	41	3357	41	3505	73D	3545	73B
3318	41	3358	41	3506	73D	3546	73B
3319	41	3359	41	3507	73D	3547	73B
3320	41	3360	41	3508	73D	3550	73D
3321	41	3361	41	3509	73D	3551	73D
3322	41	3362	41	3510	73D	3552	73D
3323	41	3363	41	3511	73D	3553	73D
3324	41	3364	41	3512	73D	3554	73D
3325	41	3365	41	3513	73D	3555	73D
3326	41	3366	41	3514	73D	3556	73D
3327	41	3367	41	3515	73D	3557	73D
3328	41	3368	41	3516	73D	3558	73D
3329	41	3369	41	3517	73D	3559	73D
3330	41	3370	41	3518	73D	3560	73D
3331	41	3371	41	3519	73D	3561	73D
3332	41	3372	41	3520	73D	3562	73D
3333	41	3373	41	3521	73D	3563	73D
3334	41	3374	41	3522	73D	3564	73D
3335	41	3375	41	3523	73D	3505	73D
3336	41	3376	41	3524	73D	3566	73D
5337	41	3377	41	3525	73D	3567	73D
3330	41	3378	41	3526	73D	3568	73D
3339	41	3379	41	3527	73D	3569	73D
3340	41	3380	41	3528	73D	3570	73D
3341	41	3381	41	3529	73C	3571	73D
3342	41	3382	41	3530	73B	3572	73D
3343	41	3383	41	3531	73B	3573	73D
3344	41	3384	41	3532	73B	3574	73D
3345	41	3385	41	3533	73B	3575	73D

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.
3576	73D
3577	73D
3578	73D
3579	73D
3580	73B
3581	73B
3582	73B
3583	73B
3584	73B
3585	73B
3586	73B
3587	73B
3588	73B
3589	73B
3590	73D
3591	73D
3592	73D
3593	73D
3594	73D
3595	73D
3596	73D
3597	73D
3598	73D
3599	73D
3610	73D
3611	73D
3612	73D
3613	73D
3614	73D
3615	73D
3616	73D
3617	73D
3618	73D
3619	73D
3620	73D
3621	73D
3622	73D
3623	73D
3624	73D
3625	73D
3626	73D
3627	73D
3628	73D
3629	73D
3630	73D
3631	73D
3632	73D
3633	73D
3634	73D
3635	73D
3636	73D
3637	73D
3638	73D
3639	73D
3640	73D
3641	73D
3642	73D
3643	73D
3644	73D
3645	73D
3646	73D
3647	73D
3648	73D
3700	73D
3701	73D
3702	73D
3703	73D
3704	73D
3705	73D
3706	73D
3707	73D
3708	73D
3709	73D
3710	73D
3711	73D
3712	73D
3713	73D
3714	73D
3715	73D
3716	
3717	
3718	73D
3719	73D
3720	73D
3721	73D
3722	73D
3723	73D
3724	73D
3725	73D
3726	73D
3727	73D
3728	73D
3729	73D
3730	73D
3731	73D
3732	73D
3733	73D
3734	73D
3735	73D
3736	73D
3737	73D
3738	73D
3739	73D
3740	73D
3741	73D
3742	73D
3743	73D
3744	73D
3745	73D
3746	73D
3747	73D
3750	73D
3751	73D
3752	73D
3753	73D
3754	73D
3755	73D
3756	73D
3757	73D
3758	73D
3759	73D
3760	73D
3761	73D
3762	73D
3763	73D
3764	73D
3765	73D
3766	73D
3767	73D
3768	73D
3769	73D
3770	73D
3771	73D
3772	73D
3773	73D
3774	73D
3775	73D
3776	73D
3777	73D
3776	73D
3779	73D
3780	73D
3781	73B
3782	73B
3783	73B
3784	73B
3785	73B
3786	73B
3787	73B
3788	73B
3789	73B
3790	73B
3791	73B
3792	73B
3793	73B
3799	73B
3795	73B
3796	73B
3797	73B
3800	73D
3801	73D

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.
3802	73D
3803	73D
3804	73D
3805	73D
3806	73D
3807	73D
3808	73D
3809	73D
3810	73D
3811	73D
3812	73D
3813	73D
3814	73D
3815	73D
3816	73D
3817	73D
3818	73D
3819	73D
3820	73D
3821	73D
3822	73D
3823	73D
3824	73D
3825	73D
3826	73D
3827	73D
3828	73D
3829	73D
3830	73B
3831	73D
3832	73B
3833	73B
3834	73B
3835	73B
3836	73B
3837	73B
3838	73B
3839	73B
3840	73B
3841	73B
3842	73B
3843	73B
3844	73B
3845	73B
3846	73B
3847	73D
3850	73D
3851	73D
3852	73D
3853	73D
3854	73D
3855	73D
3856	73D
3857	73D
3858	73D
3859	73D
3860	73D
3861	73D
3862	73D
3863	73D
3864	73D
3865	73D
3866	73D
3867	73D
3868	73D
3869	73D
3870	73D
3871	73D
3872	73D
3873	73D
3874	73D
3875	73D
3876	73D
3877	73D
3878	73D
3879	73D
3880	73D
3881	73D
3882	73D
3883	73D
3884	73B
3885	73B
3886	73B
3887	73B
3888	73B
3889	73B
3890	73B
3891	73B
3892	73B
3893	73B
3894	73B
3895	73B
3896	73B
3897	73D
3900	73D
3901	73D
3902	73D
3903	73D
3904	73D
3905	73D
3906	73D
3907	73D
3908	73D
3909	73D
3910	73D
3911	73D
3912	73D
3913	73D
3914	73D
3915	73D
3916	73D
3917	73D
3918	73D
3920	73D
3921	73D
3922	73D
3923	73D
3924	73D
3925	73D
3926	73D
3927	73D
3928	73D
3929	73D
3930	73B
3931	73B
3932	73B
3933	73B
3934	73B
3935	73B
3936	73B
3937	73B
3938	73B
3939	73B
3940	73B
3941	73B
3942	73B
3943	73B
3942	73B
3945	73B
3946	73B
3947	73
4662	104
4663	104
4664	106
4665	106
4666	104
4667	104
4669	90
4671	90
4672	104
4674	104
4675	104
4677	104
4678	122
4683	104
4684	102
4685	102
4686	102
4689	88
4691	90

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
-c92	9[illegible]	-7b5	9-	-c-8	5c	-975	122
-c9-	9c	-7c0	9-	-c49	52	-97c	122
-c9c	9[illegible]	-771	9-	-c5c	5c	-977	122
-c98	9c	-771	9-	-c63	6c	-97c	118
-7[illegible]	9c	-772	9-	-c6-	9c	-979	118
-7[illegible]	9c	-773	9-	-c6c	5c	-98[illegible]	8[illegible]
-7c8	112	-7c2	92	-85c	5-	-981	80
-7c7	11c	-7c8	9-	-c99	92	-983	8[illegible]
-7c8	115	-7-c	cc	-c61	5c	-9c-	82
-7c9	11c	-781	9-	-c62	5c	-985	8[illegible]
-713	11-	-783	8c	-c63	--	-9cc	81
-71-	11-	-78c	c-	-cc-	--	-989	91
-71c	11-	-78c	c-	-c65	--	-991	8[illegible]
-717	8c	-789	c-	-c67	95	5[illegible]	58
-718	9c	-c.3	c-	-c6c	--	5c46	1c
-719	11-	-c.5	c-	-cc9	98	5c48	16
-722	11-	-c.8	88	-87[illegible]	9[illegible]	5c52	16
-723	11-	-c1c	9[illegible]	-c7-	9-	5c5-	1c
-72c	11-	-c11	c8	-c75	9-	5c6c	24
-729	118	-c12	c[illegible]	-c7c	92	5c[illegible]1	24
-73c	119	-c13	c-	-8c-	9[illegible]	5c62	24
-731	12[illegible]	-81-	5c	-c85	52	5c63	24
-732	9c	-c1[illegible]	c-	-ccc	52	5c6c	16
-73-	9-	-c1[illegible]	5c	-c[illegible]	cc	5c69	16
-735	98	-821	c8	-891	9-	5c7c	16
-73c	9c	-822	c8	-892	--	5c71	16
-737	9c	-825	8c	-893	--	62cc	116
-738	9c	-829	92	-89-	5c	62c1	120
-739	9c	-83[illegible]	9[illegible]	-897	5c	6282	c6
-74[illegible]	9c	-831	92	-9c[illegible]	9-	62c3	102
-741	9c	-83-	9[illegible]	-9c1	5c	c2c4	104
-742	9c	-83c	92	-92	5-	62cc	106
-743	98	-836	9c	-9c-	1c	c2c6	66
-74c	9-	-838	92	-98c	1[illegible]	6297	c[illegible]
-74[illegible]	9-	-839	92	-9cc	5[illegible]	62[illegible]	--
-746	9-	-c-2	5c	-9c8	5c	c226	44
-749	98	-c--	5c	-95c	2c	6233	--
-75[illegible]	9c	-c-5	c[illegible]	-969	cc	6239	44
-751	98	-c-6	5c	497[illegible]	c6	625c	-2
-752	93	-c-7	5-	-971	c5	6251	42

New page

Source: https://assist.dla.mil -- Downloaded: 2026[illegible]-23T20:54Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.
0263	44
0264	44
0265	44
0267	56
0272	42
0273	42
0277	42
0279	92
0280	54
6292	52
0293	52
0294	52
0296	110
0300	52
6308	54
0310	54
0311	52
0312	52
6320	96
0321	90
0322	90
0323	90
6324	98
0325	98
0326	98
0328	98
0329	98
6330	98
0331	98
6332	100
0333	100
0359	74
0369	12
0370	94
0372	126
6696	86
0697	86
6698	86
6699	86
6700	80
6701	80
6706	88
6707	88
0710	86
6713	80
6870	120
6873	12
6874	14
0920	56
6921	88
6922	98
6923	86
6926	86
6929	84
6930	90
6937	96
0939	88
0941	14
0942	14
6991	128
6992	128
6993	128
0994	126
6995	126
6996	34
6997	34
6998	34
6999	34
7001	126
7002	126
7003	126
7004	126
7005	126
7021	34
7022	32
7023	32
7024	34
7025	28
7026	28A
7027	28A
7028	28
7029	28A
7030	28
7301	16
7302	16
7572	20
7576	20
7577	26
7590	20
7591	18
7592	18
7594	18
7595	18
7597	18
7598	18
7600	20
7601	20
7602	20
7603	20
7604	20
7605	20
7609	20
7610	20
7611	20
7612	22
7613	22
7614	22
7618	22
7619	22
7620	22
7621	22
7622	22
7623	22
7627	22
7628	22
7629	128
7630	128
7631	18
7632	18
7633	18
7634	18
7635	18
7636	18
7637	20
7638	20
7639	20
7641	22
7645	18
7646	18
7647	20

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Acceleration	42
Additional Part Marking	128
Additional Requirements	128
Altitude Rating	24
Aperture Cards Required	14
Applicable Documents	128
Base Document	7 2
Capacitance	46
Circuit Configuration	.32
City, State, Zip	12
Classification	24
Company Name/Command	12
Configuration	26
Contract Number/Office Symbol	12
Control, Source	12
Control, Specification	14
Current Rating	18
Date	12
DC Resistance	48
Definition of Hermetic Sealing	128
Design and Constructio	30
Design Reliability	28
Dielectric Withstanding Voltage at Reduced Barometric Pressure	50
Dielectric Withstanding Voltage at Sea Level	54
Discrimination	58
Electrical Characteristics	36
Enclosure	30
Finishes	28
Flammability (External Flame)	60
Flashpoint of Impregnant or Potting Compound	62
Format	12
Frequency Rating	22
Government Design Activity FSCM	12
Humidity	64
Illustrations	26
Immersion	68
Impedance	68
Insertion Loss	70

Supersedes page 179 of 15 February 1979

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

Page

Insulation Resistance - 74

Materials - 28
Metals - 28
Moisture. Resistance - 78
Mounting Hardware - 126
Mounting Means - 30

Nomenclature - 128
Notes - 128
Number of Sections (Circuits) - - - - - - - - - - - - - - - - - - 32

Overload - 82

Packaging - 128
Part Marking - 126
Part Number - 14
Part Number Cross-Reference - 128
Phone Number - 12
power Rating - 18

Quality Assurance Provisions - 128

Reliability Screening - 84
Requester FSCM - 12
Requester's Name - 12
Resistance to Soldering Heat - 88
Resistance to Solvents - 90
Revision of AEDPS Document (Number) - - - - - - - - - - - - - - - - - - 14

Salt Spray- 92
Scope - 14
Seal - 94
Shock, High Impact - 100
Shock, Specified pulse - 102
Solderability - 104
Source Table - 14
Stability at Temperature Extremes - 106
Street/Building - 12
Superseded Document - 128
System Application - 12

Tabulated Characteristics - 28
Temperature Rating - 16
Temperature Rise - 108

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Terminal Strength	110
Terminals	32
Thermal Shock (Temperature Cycling)	114
Units of Measure	14,26
Vibration, High Frequency	114
Vibration, Low Frequency	116
Vibration, Random	120
Voltage Drop	124
Voltage Rating	20
Voltage Standing Wave Ratio (VSWR)	124
Weight	32
Workmanship	126

U.S.GOVERNMENT PRINTING OFFICE: 1980-703-023/4665

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.