MILITARY SPECIFICATION

CIRCUIT CARD ASSEMBLY

TARGET ACCELERATION BOARD: 11747207

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers a target acceleration printed circuit board assembly, hereinafter identified as "target acceleration board," a part of Range Computer Test Panel, Subassembly MX-8049/TPM-22, a part of Radar Test Set AN/TPM-22.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Military

MIL-F-13926	Fire Control Materiel: General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Parts Equipment and Tools for Army Materiel: Packaging and Packing of
MIL-I-45607	Inspection Equipment, Supply and Maintenance of
MIL-C-46357	Computer, Gun Direction: M18; Manufacturing Process and Inspection of

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-810	Environmental Test Methods

Source: https://assist.dla.mil -- Downloaded: 202640-22T19:32Z
Check the source to verify that this is the current version before use.

DRAWINGS

U. S. Army, Frankford Arsenal

F11747209	Schematic, Target Acceleration Board
F11747207	Target Acceleration Board

PACKAGING DATA SHEET

11747207	Packaging of Target Acceleration Board

(Copies of specification, standards, drawings, and packaging data sheets required by the suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Fabrication.- The target acceleration board shall be manufactured in accordance with Drawing F11747207 and drawings pertaining thereto.

3.2 General specification.- Where applicable, the target acceleration board shall meet the requirements of MIL-F-13926 and MIL-C-46357 as follows:

3.2.1 MIL-F-13926.

a. Order of precedence.

b. Dimensions and tolerances.

c. Inorganic protective surface finishings.

d. Part identification and marking.

e. Workmanship.

f. Soldering electrical connections.

3.2.2 MIL-C-46357.

a. Etched circuit assemblies.

b. Wiring.

c. Threaded fasteners.

d. Marking.

e. Finishes

Source: https://assist.dla.mil -- Downloaded: 20260-22T19:32Z
Check the source to verify that this is the current version before use.

3.3 Environmental service conditions.

3.3.1 Vibration.- The target acceleration board shall be mounted on the vibration table in normal service position. The target simulator shall meet the requirements of 3.4 and 3.5 after being subject to continuous vibration for two hours along each of three mutually perpendicular axes within the frequency range and amplitude as follows:

Frequency Range	Double Amplitude
5 to 15	0.06 inch
15 to 25	0.04 inch
25 to 55	0.02 inch

The rate of change of frequency at each frequency range shall not exceed one cycle-per-second per second (1 cps/sec). Vibration tests shall be conducted under ambient room conditions.

3.3.2 Shock.- The target acceleration board shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after being subjected to 18 impact shocks, consisting of three shocks in opposite directions along each of the three mutually perpendicular axes. The shock impulses shall have an acceleration of 15 gravity units (G's) and a pulse duration of 11 $\pm$ 1 milliseconds. The G value of each impulse shall be within $\pm$ 10 percent when measured with a 0.2 to 250 Hz filter and the maximum G shall occur at approximately 5-1/2 milliseconds.

3.3.3 Altitude.

3.3.3.1 Operating.- The target acceleration board shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches Hg).

3.3.3.2 Nonoperating.- The target acceleration board shall meet the requirements of 3.4 and 3.5 after exposure for not less than 1 hour to barometric pressure encountered at 40,000 feet above sea level (5.5 inches Hg).

3.3.4 Temperature.

3.3.4.1 Operating.- The target acceleration board shall meet the requirements of 3.4 and 3.5 when stabilized thermally at any temperature between +32°F and +131°F.

3.3.4.2 Nonoperating (storage).- The target acceleration board shall not suffer permanent damage when subjected to the temperature extremes of -80°F and +185°F, and shall meet the requirements of 3.4 and 3.5 when returned to room ambient.

Source: https://assist.dla.mil -- Downloaded: 202640-22T19:32Z
Check the source to verify that this is the current version before use.

3.3.5 Humidity-nonoperating.- The target acceleration board shall meet the requirements of 3.4 and 3.5 after exposure to an atmosphere with a relative humidity in excess of 95 percent for a period of 10 days.

3.4 Electrical.

3.4.1 Continuity.- Each conductor shall be continuous electrically as specified on the schematic diagram F11747209.

3.4.2 Resistance.- Resistance shall be 1K ohms ±10% between the following terminals.

From	To
P1-37	P1-30
P1-39	P1-30
P1-7	P1-30
P1-1	P1-30

3.5 Performance.- For the requirements of 3.5.1 through 3.5.3 logic levels shall be as follows:

Logic 0 = 0.0 ± 0.5 Vdc

Logic 1 = 4.25 ± 1.00 Vdc

↓ = momentary transistion from logic 1 to logic 0.

3.5.1 Target signals.- When supplied with the inputs as specified in Table I, the target acceleration board shall yield the outputs as specified in Table I.

TABLE I - TARGET SIGNALS, INPUT/OUTPUT CHARACTERISTICS

REQUIREMENT	CHARACTERISTICS	TERMINALS
Input Power	5.00 ± 0.25 Vdc regulated, AC ripple not greater than 50 mv p-p, 600 ma capacity	P1-30(+) P1-24 (Ret.)
Input Signals		
T_o[1]	Positive pulse from 0 to 4.0 ± 0.5 Vdc, width of between 0.2 to 0.6 us at 50% points, PRF of 20.000 ± 0.200 KHz	P1-5 P1-24 (Ret.)
Target Overflow	Positive pulse from 0 to 4.0 ± 0.5 Vdc, width of 1.0 ± 0.1 us, leading edge delayed 15.0 ± 1.0 us from leading edge of T_o[1]	P1-17 P1-24 (Ret.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

TABLE I - TARGET SIGNALS, INPUT/OUTPUT CHARACTERISTICS Cont'd

REQUIREMENT	CHARACTERISTICS	TERMINALS
Output Signals		
Target Clear	Positive pulse from 0 to 4.0 ± 0.5 Vdc, width of 15.0 ± 1.0 us, trailing edge is coincident with leading edge of T_o^1, PRF of 20.000 ± 0.200 KHz	P1-15 P1-24 (Ret.)
Target Trigger	Positive pulse from 0 to 4.0 ± 0.5 Vdc, width of 35.0 ± 1.0 us, leading edge coincides with leading edge of T_o^1, PRF of 20.000±0.200 KHz	P1-10 P1-24 (Ret.)
TARGET RESET	Positive pulse from 0 to 4.0 ± 0.5 Vdc, width of 5.2 ± 0.5 us, leading edge delayed 15.0 ± 1.0 us from leading edge of T_o^1, PRF of 20.000 ± 0.200 KHz	P1-19 P1-24 (Ret.)
Strobe	Positive pulse from 0 to 4.0 ± 0.5 Vdc, width of 1.4 ± 0.4 us, leading edge delayed 42.0 ± 2.0 us from leading edge of T_o^1, PRF of 20.000 ± 0.200 KHz	P1-13 P1-24 (Ret.)
Doppler	50% square wave, from 0 to 4.0 ± 0.5 Vdc, PRF of 1.000 ± 0.010 KHz	P1-35 P1-24 (Ret.)
80 M/S^2	50% square wave, 0 to 4.0 ± 0.5 Vdc, PRF 31.25 ± 1.00 Hz	P1-44 P1-24 (Ret.)
20 M/S^2	50% square wave, 0 to 4.0 ± 0.5 Vdc, PRF of 7.80 ± 0.05 Hz	P1-42 P1-24 (Ret.)

3.5.2 Count-up, count-down outputs.- With the input Logic Levels applied sequentially (Table II - left to right per test, tests 1 → 8) as specified in Table II, and a ↓ applied to P1-1 to start each test, the output signals shall be as specified in Table II. Any output signal shall be changed to Logic 0 by applying a ↓ to P1-52. Between the time a ↓ is applied to P1-1 and P1-52, P1-55 shall be at Logic 0 and at any other time Logic 1. The 20 M/S^2 and 80 M/S^2 signals applied to P1-40 are obtained from P1-42 and P1-44 respectively.

3.5.3 Stop, $\overline{\text{Stop}}$ Outputs.- With the input Logic Levels applied sequentially (Table III - left to right per test, tests 1 → 7) as specified in Table III, the output signals shall be as specified in Table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

TABLE II - COUNT-UP, COUNT-DOWN OUTPUT

	INPUT SIGNALS						OUTPUT SIGNALS	
Test	P1-7	P1-9	P1-11	P1-37	P1-39	P1-40	P1-21	P1-23
1	Logic 1	Logic 0	Logic 1	Logic 1	Logic 0	Logic 1	Fig. 1	Logic 1
2	Logic 1	Logic 1	Logic 0	Logic 1	Logic 0	Logic 1	Logic 1	Fig. 1
3	Logic 1	Logic 0	Logic 1	Logic 0	Logic 1	Logic 1	Fig. 2	Logic 1
4	Logic 1	Logic 1	Logic 0	Logic 0	Logic 1	Logic 1	Logic 1	Fig. 2
5	Logic 0	Logic 0	Logic 1	Logic 1	Logic 1	20 M/S^2	Fig. 3	Fig. 3
6	Logic 0	Logic 1	Logic 0	Logic 1	Logic 1	20 M/S^2	Fig. 3	Fig. 3
7	Logic 0	Logic 0	Logic 1	Logic 1	Logic 1	80 M/S^2	Fig. 4	Fig. 4
8	Logic 0	Logic 1	Logic 0	Logic 1	Logic 1	80 M/S^2	Fig. 4	Fig. 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

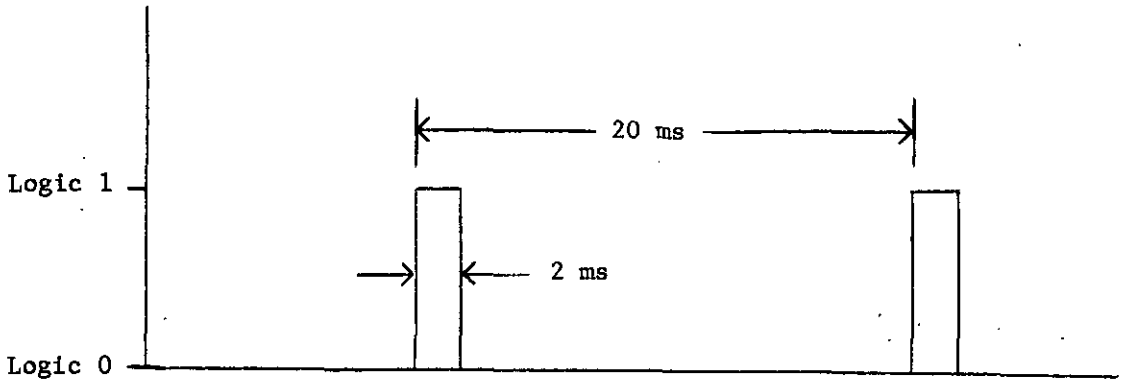


Figure 1. Output Signal

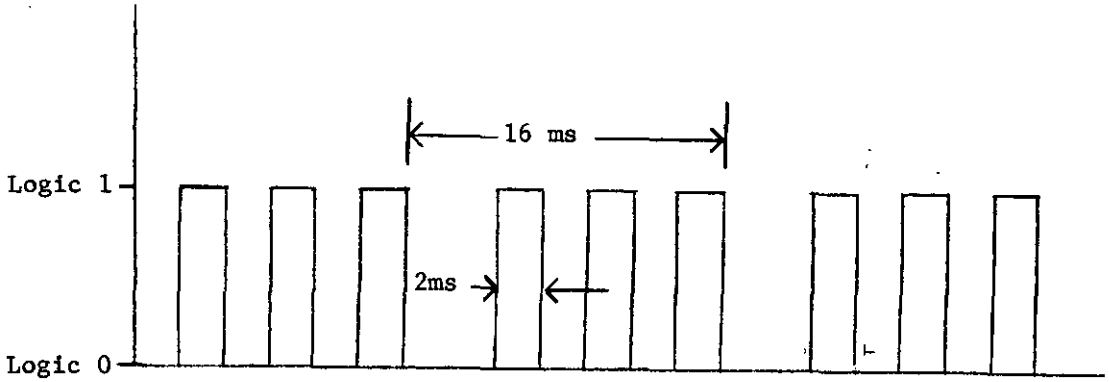


Figure 2. Output Signal

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

NOTE: τ_1 becomes progressively larger

τ_2 becomes progressively smaller

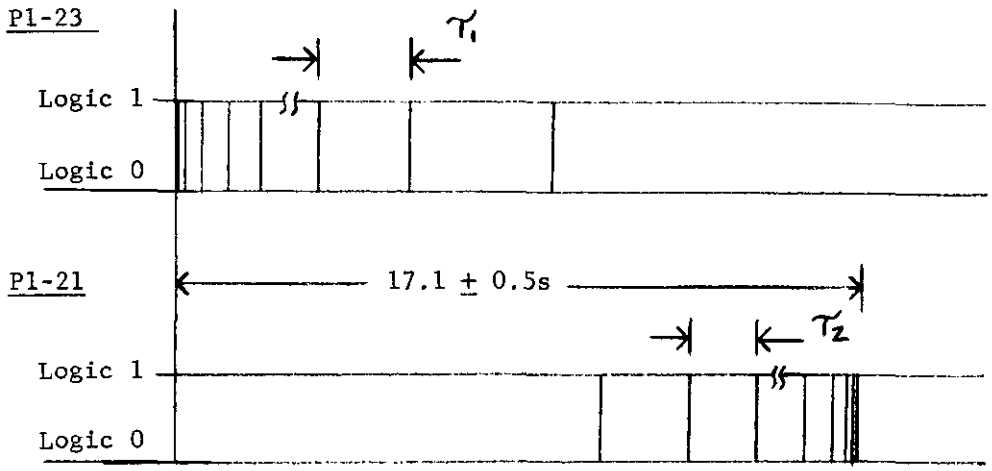


Figure 3. Output Signal

NOTE: τ_1 becomes progressively larger

τ_2 becomes progressively smaller

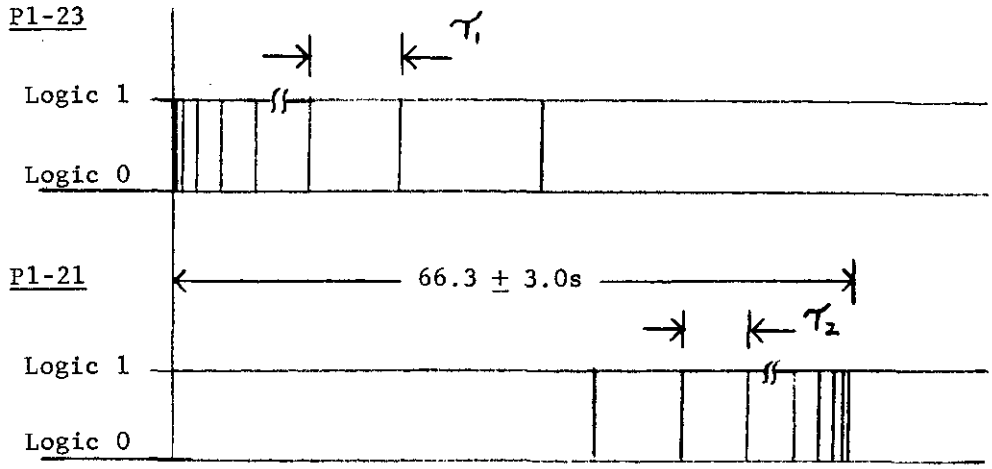


Figure 4. Output Signal

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

TABLE III - STOP, $\overline{\text{STOP}}$ CHARACTERISTICS

	INPUT				OUTPUT	
Test	P1-1	P1-41	P1-43	P1-52	P1-45	P1-49
1	↓	Logic 1	Logic 1	Logic 1	Logic 1	Logic 0
2	Logic 1	↓	Logic 1	Logic 1	Logic 0	Logic 1
3	↓	Logic 1	Logic 1	Logic 1	Logic 1	Logic 0
4	Logic 1	Logic 1	↓	Logic 1	Logic 0	Logic 1
5	↓	Logic 1	Logic 1	Logic 1	Logic 1	Logic 0
6	Logic 1	Logic 1	Logic 1	↓	Logic 0	Logic 1
7	↓	Logic 1	Logic 1	Logic 0	Logic 0	Logic 1

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:32Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 General provisions.- The component and subassembly inspection requirements of MIL-F-13926 form a part of the Quality Assurance Provisions of this specification. Definitions of inspection terms shall be listed in MIL-STD-109.

4.2 First article (initial production) approval.- The requirement for first article approval and the responsibility (Government or contractor) for first article testing shall be as specified in the contract. The sample for first article approval tests shall consist of one target acceleration board manufactured in the same manner, using the same materials, equipment, processes and procedures as used in regular production. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as used in regular production.

4.2.1 Government testing.- When the Government is responsible for conducting first article approval tests, the contractor, prior to submitting the sample to the Government, shall inspect the sample to ensure that it conforms to all the requirements of the contract and submit a record of this inspection with the sample, including certification of conformance for materials.

4.2.2 Contractor testing.- When the contractor is responsible for conducting first article approval tests, the sample shall be inspected by the contractor for all the requirements of the contract. The sample and a record of this inspection, including certification for materials, shall be submitted to the Government for approval. The Government reserves the right to witness the contractor's inspection.

4.3 Inspection provisions.

4.3.1 Submission of product.- Unless otherwise specified by the Contracting Officer, inspection lot size, lot information, and presentation of lots shall be in accordance with "Submission of Product" provisions of MIL-STD-105.

4.3.2 Examination and tests.- Components and subassemblies shall be inspected in accordance with the inspection provisions contained in MIL-F-13926. Examinations and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:32Z
Check the source to verify that this is the current version before use.

accordance with MIL-STD-105 and the sampling plans specified in Tables IV and V herein. Examinations and tests for Packaging, Packing and Marking shall be in accordance with MIL-P-14232 and Section 5 herein. The tabulated classification of defects shall constitute the minimum inspection to be performed by the supplier prior to Government acceptance or rejection by lot.

TABLE IV - CLASSIFICATION OF DEFECTS

100% INSPECTION

	CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
101.	Continuity	3.4.1	4.6.2.1
102.	Resistance	3.4.2	4.6.2.2
103.	Performance	3.5	4.6.3

4.3.3 Acceptance and rejection.- Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and resubmittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

4.4 Special sampling.- One target acceleration board out of the first 50 produced and one out of each 100 produced thereafter shall be selected at random. The sample shall have met the requirements and tests in Table IV and shall then meet the requirements and tests in Table V.

TABLE V - SPECIAL SAMPLING

	CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
301.	Fabrication	3.1	Applicable dwg. visual
302.	General specification	3.2	MIL-F-13926, visual
303.	Vibration	3.3.1	4.6.1.1
304.	Shock	3.3.2	4.6.1.2
305.	Altitude - operating	3.3.3.1	4.6.1.3
306.	Altitude - nonoperating	3.3.3.2	4.6.1.3
307.	Temperature	3.3.4	4.6.1.4
308.	Humidity	3.3.5	4.6.1.5

Source: https://assist.dla.mil -- Downloaded: 202640-22T19:32Z
Check the source to verify that this is the current version before use.

4.4.1 Failure of sample.- Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the product shall be suspended by Government until necessary corrections have been made by the contractor and a resubmitted sample has been approved (see 4.3.3).

4.5 Inspection equipment.- Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of MIL-I-45607.

4.5.1 Government-furnished inspection equipment.- Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

4.5.2 Contractor-furnished inspection equipment.

4.5.2.1 Contractor design.- The contractor shall design and supply inspection equipment compatible with "Test Methods and Procedures" specified in 4.6 of this specification and with the "Component Inspection" procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926. Since tolerance of test equipment is considered normally to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in design of test equipment shall be so selected and controlled as to ensure that the test equipment will indicate reliable acceptability of a product that does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of the test equipment.


4.5.2.2 Test equipment.- In conjunction with 4.5.2.1 the test equipment in Table VI shall be used in the performance of the applicable tests as specified in 4.6.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:32Z
Check the source to verify that this is the current version before use.

TABLE VI - TEST EQUIPMENT

ITEM NUMBER	DESCRIPTION
1. Power Supply	5.00 ± 0.25 Vdc, regulated, ac ripple less than 50 mv p-p, 600 ma capacity
2. Pulse Generator	Positive pulse, 0 to 4.0 ± 0.5 Vdc, width of 0.2 to 0.6 us at 50% points, 20.000 ± 0.200 KHz repetition rate
3. Oscilloscope	Dual channel, rise time of oscilloscope plus probe not greater than 10 ns, sweep period less than 50 ns, input resistance 8 megohms or greater
4. Digital Voltmeter	0 to 6 Vdc, .1% accuracy, input impedance greater than 10 megohms
5. Ohmmeter	0 to 1200 ohms, ± 1% accuracy
6. Test Fixture	As specified in Figure 5. See Table VII for test fixture parts list.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:32Z
Check the source to verify that this is the current version before use.

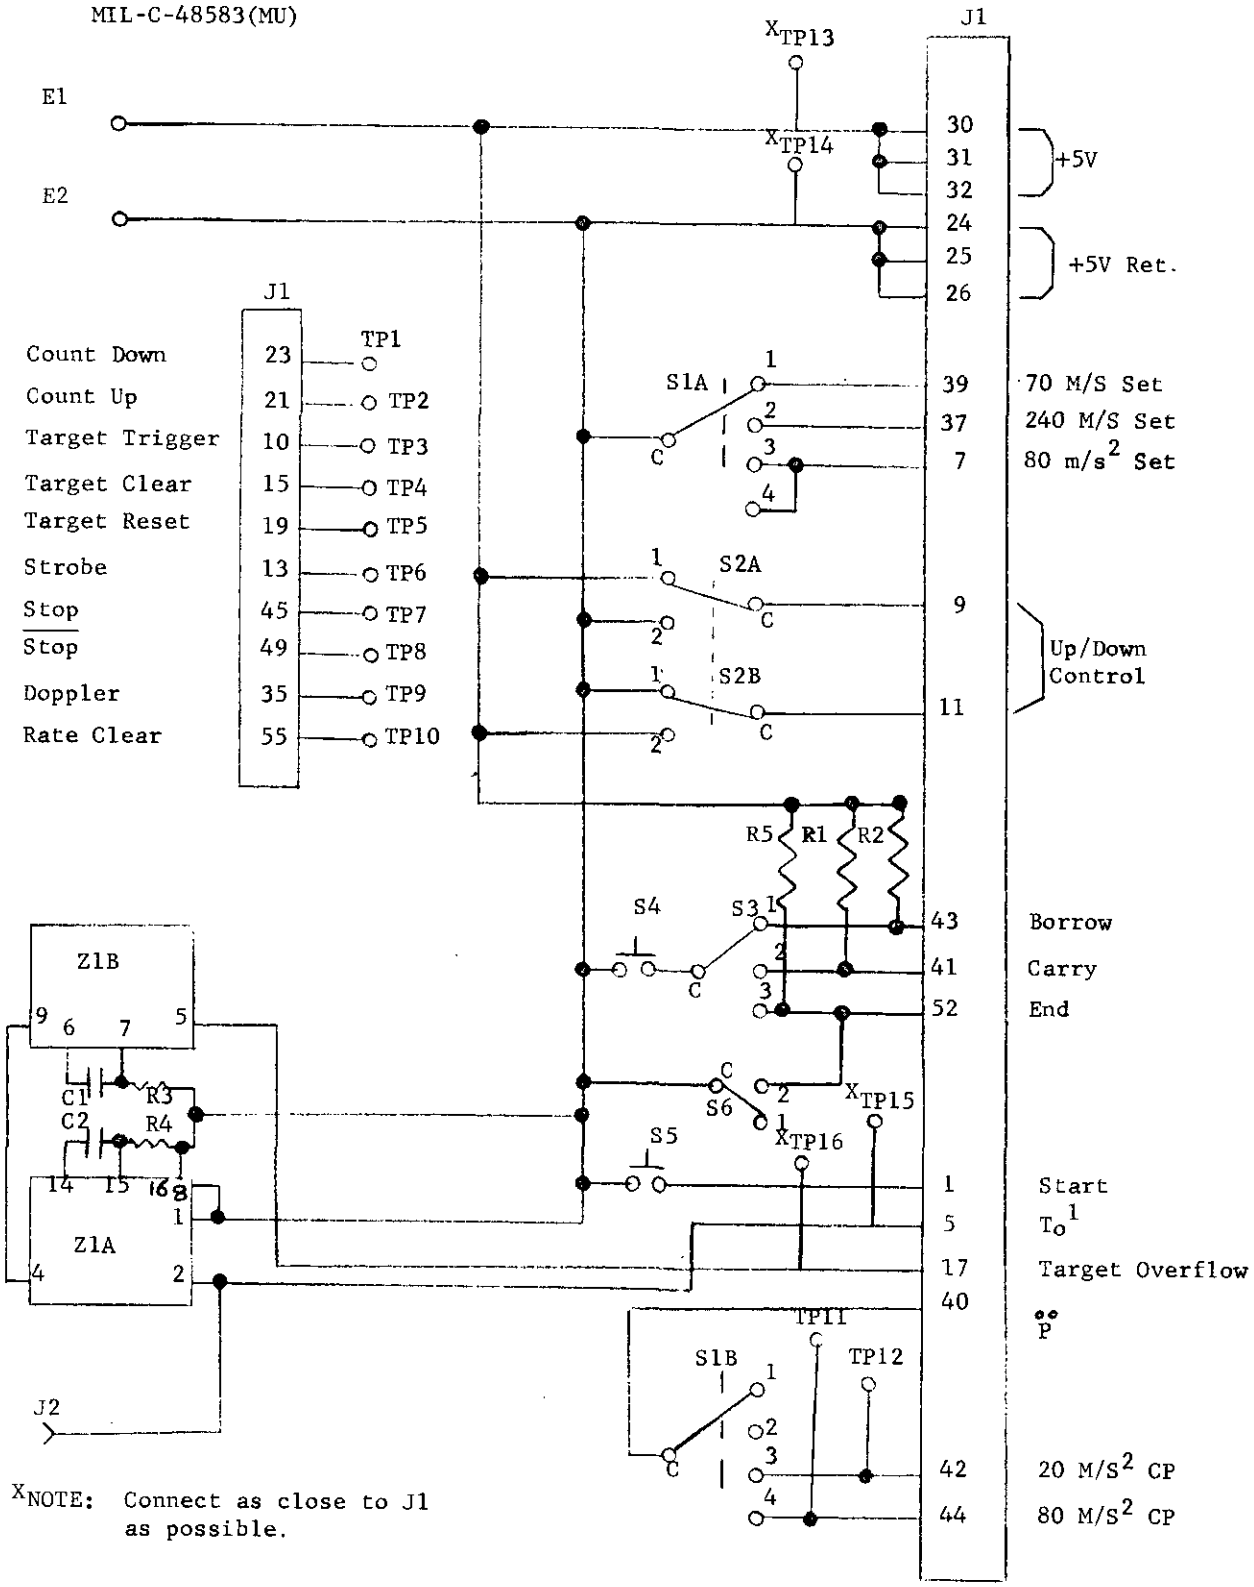

XNOTE: Connect as close to J1 as possible.

Figure 5. Test Fixture Setup

Source: https://assist.dla.mil -- Downloaded: 20260-22T19:32Z
Check the source to verify that this is the current version before use.

TABLE VII - TEST FIXTURE PARTS LIST

DESIGNATION	NOMENCLATURE AND DESCRIPTION
E1	Binding post, H. H. Smith 257-R or equiv.
E2	Binding post, H. H. Smith 257-B or equiv.
J1	Connector, per Frankford Arsenal Dwg. D10554938
J2	Connector, BNC receptacle
R1, R2, R5	Resistor, 1K ohms ± 10%, 1/4 watt
S1	Switch two pole four position
S2	Switch DPDT
S3	Switch SPTT
S4, S5	Switch, momentary SPST
S6	Switch, SPST
TP1 thru TP16	Tip Jack, H. H. Smith 1501 or equiv.
Z1	Integrated Circuit Texas Instruments P/N SN54123J
C1, C2	Capacitor, 4700 pf ± 10%, 100V
R3	Resistor, 3.3K ohms ± 10%, ½ watt
R4	Resistor, 12K ohms ± 10%, 1/4 watt

4.6 Test methods and procedures.

4.6.1 Environmental.- Environmental tests shall be conducted in accordance with the general requirements and test methods of MIL-STD-810 except as specified herein. Testing equipment used in environmental tests shall be in accordance with "Test Facilities and Apparatus" requirements of MIL-STD-810.

4.6.1.1 Vibration.- The test shall be performed as specified in Method 514, Procedure IX, Part I, of MIL-STD-810 except Failure criteria does not apply and the duration, frequency, and amplitude limits of 3.3.1 of this specification shall apply. After vibration, the target acceleration board shall be tested as specified in 4.6.2 and 4.6.3 to determine compliance to 3.3.1.

Source: https://assist.dla.mil -- Downloaded: 202640-22T19:32Z
Check the source to verify that this is the currentversion before use.

4.6.1.2 Shock.- This test shall be performed as specified in 3.3.2 and Procedure I of Method 516 of MIL-STD-810. After the shock impulses, the target acceleration board shall be tested as specified in 4.6.2 and 4.6.3 to determine compliance with 3.3.2.

4.6.1.3 Altitude (non-operating and operating).- This test shall be performed as specified in Procedure I, Method 500 of MIL-STD-810 except that in step 2 the altitude shall be limited to 40,000 ft. (5.5 in. Hg). Operation of steps 3 and 5 shall be the performance tests 4.6.2 and 4.6.3 to determine compliance with 3.3.3.

4.6.1.4 Temperature.

4.6.1.4.1 High (operating and non-operating).- This test shall be performed as specified in Procedure I, Method 501, of MIL-STD-810 except as follows. The temperature of step 2 shall be +185°F. The temperature of step 4 shall be +131°F. In steps 5 and 7 the target acceleration board shall be tested in accordance with 4.6.2 and 4.6.3 to determine compliance with 3.3.4.

4.6.1.4.2 Low (operating and non-operating).- This test shall be performed as specified in Procedure I, Method 502 of MIL-STD-810 except as follows. The temperature of step 2 shall be -85°F and maintained for 24 hours. The temperature of step 4 shall be +32°F. In steps 5 and 7, the target acceleration board shall be tested in accordance with 4.6.2 and 4.6.3 to determine compliance with 3.3.4.

4.6.1.5 Humidity (non-operating).- This test shall be performed in accordance with Procedure II, Method 507 of MIL-STD-810. In steps 4 and 8 the target acceleration board shall be tested in accordance with 4.6.2 and 4.6.3 to determine compliance with 3.5.

4.6.2 Electrical.

4.6.2.1 Continuity.- Continuity shall be inspected by standard measuring equipment (SME) and visual examination to determine compliance with 3.4.1.

4.6.2.2 Resistance.- Resistance shall be measured with ommeter (item 5) to determine compliance with 3.4.2.

4.6.3 Performance.- The selected target acceleration board shall be tested as specified in 4.6.3.1.1 through 4.6.3.1.3 to determine compliance with 3.5. Logic levels shall be as follows:

Logic 0 = 0.0 ± 0.5 Vdc

Logic 1 = 4.25 ± 1.00 Vdc

 = momentary transistion from Logic 1 to Logic 0

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

4.6.3.1 Test Setup.- Connect target acceleration board (11747207), Test Fixture (item 6), and Test Equipment (Table VI) as shown in Figure 6.

4.6.3.1.1 Target Signals.

4.6.3.1.1.1 Input power.- Use Digital Voltmeter (item 4) to observe +5.00 ± 0.25 Vdc between TP13(+) and TP14(Ret.) to determine compliance with Input Power requirement of Table I.

4.6.3.1.1.2 Input signals.- Use Oscilloscope (item 3) to observe the $T_o{}^1$ and Target Overflow signals at TP-15 and TP-16 respectively to determine conformance with Input Signal requirements of Table I.

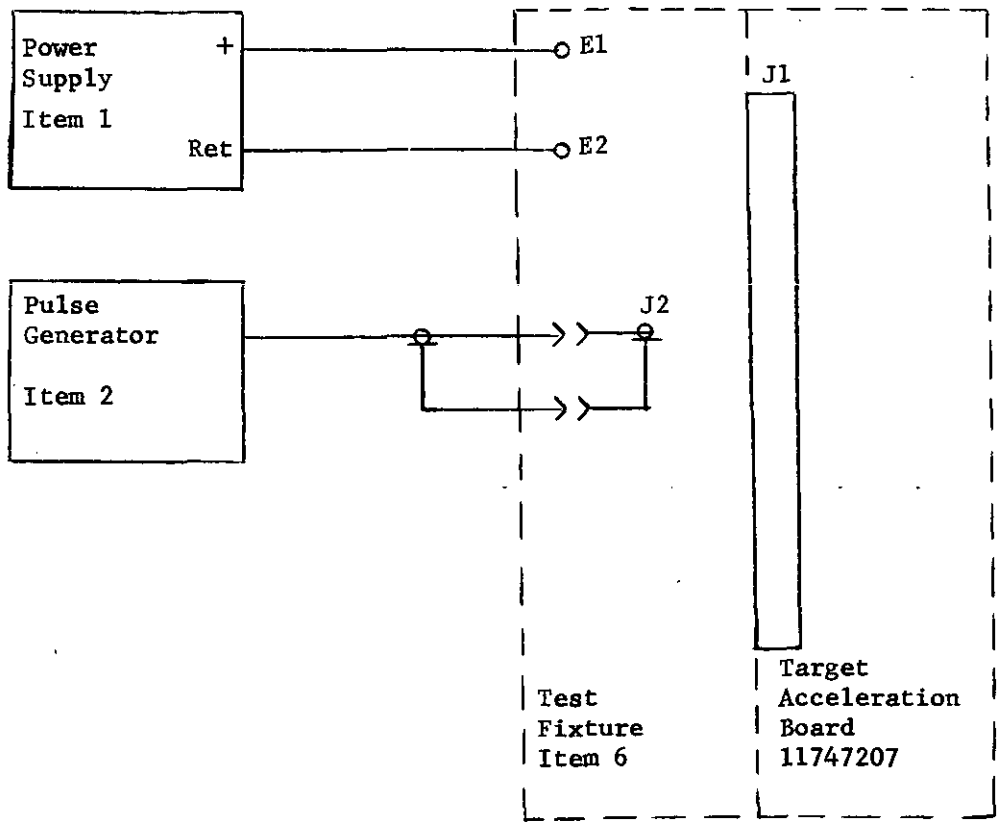


Figure 6. Target Acceleration Test Setup

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

4.6.3.1.1.3 Output signals.- The target output signals specified in Table VIII shall be observed using Oscilloscope (item 3) at specified test points and with Switch S1 set as specified to determine compliance with Output Signal requirements of Table I.

TABLE VIII - TARGET OUTPUT SIGNALS

Signal	S1 Switch Position	Test Point
Target Clear	--	TP4
Target Trigger	--	TP3
Target Reset	--	TP5
Strobe	--	TP6
Doppler	--	TP9
80 M/S^2	4	TP11
20 M/S^2	3	TP12

4.6.3.1.2 Count-up, count-down outputs.- When the input signals are applied as specified in the below test procedure and Table IX, the output signals in the test procedure and Table IX shall be observed simultaneously using Oscilloscope (item 3) to determine compliance with 3.5.2. Also, using Digital Voltmeter (item 4) determine that TP10 shall be Logic 0 during each test, and Logic 1 at any other time.

TEST PROCEDURE

1. Start test 1 by applying ↓ to P1-1 (push S5).
2. Switch S1 to specified position.
3. Switch S2 to specified position.
4. Observe Table IX output signals.
5. Stop test 1 by applying ↓ to P1-52 (set S3 to position 3 and push S4).
6. Observe output signals which shall be at Logic 0.
7. Repeat steps 1 through 6 for tests 2, 3, 4, 5, 6, 7, and 8 respectively.

Source: https://assist.dla.mil -- Downloaded: 202640-22T19:32Z
Check the source to verify that this is the currentversion before use.

TABLE IX - COUNT-UP, COUNT-DOWN SIGNALS

	INPUT SIGNALS		OUTPUT SIGNALS	
Test No.	S1 Position	S2 Position	TP2	TP1
1	1	2	Figure 1	Logic 1
2	1	1	Logic 1	Figure 1
3	2	2	Figure 2	Logic 1
4	2	1	Logic 1	Figure 2
5	3	2	Figure 3	Figure 3
6	3	1	Figure 3	Figure 3
7	4	2	Figure 4	Figure 4
8	4	1	Figure 4	Figure 4

4.6.3.1.3 Stop, $\overline{\text{Stop}}$ Outputs.- When the input signals are applied sequentially (Table X-left to right per test, tests 1 through 7) by pushing (↓) or setting switches as specified in Table X, the output signals in Table X shall be observed simultaneously using Oscilloscope (item 3) to determine compliance with 3.5.3.

TABLE X - STOP, $\overline{\text{STOP}}$ SIGNALS

	INPUT SIGNALS				OUTPUT SIGNALS	
Test No.	S5	S3	S4	S6	TP7	TP8
1	↓	--	--	1	Logic 1	Logic 0
2	--	2	↓	1	Logic 0	Logic 1
3	↓	--	--	1	Logic 1	Logic 0
4	--	1	↓	1	Logic 0	Logic 1
5	↓	--	--	1	Logic 1	Logic 0
6	--	3	↓	1	Logic 0	Logic 1
7	↓	--	--	2	Logic 0	Logic 1

5. PREPARATION FOR DELIVERY

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

5.1 Packaging.- Packaging, packing, and marking shall be in accordance with Packaging Data Sheet 11747207. The level of protection shall be as specified in the contract.

6. NOTES

6.1 Intended use.- The target acceleration board is used to provide a simulated target acceleration signal to enable the Range Computer Tester, Subassembly MX-8049/TPM-22, to locate dynamically defective portions of Unit 4 of Radar Set AN/VPS-2.

6.2 Ordering data.- Procurement documents should specify the following:

a. Title, number, and date of this specification.

b. Applicable packaging data sheet (see 5.1).

c. Selection of applicable level of preservation packaging and packing.

d. Level of protection required.

e. Applicable stock number.

f. Block of serial numbers to identify each target simulator.

Custodian:

Army - MU

Preparing Activity:

Army - MU

Project No. 4931-A134

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE MIL-C-48583(MU) Circuit Card Assembly Target Acceleration Board: 11747207

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
Frankford Arsenal
ATTN: SARFA-MDM
Phila., PA 19137

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.