MILITARY SPECIFICATION

OVERBOOT, PLASTIC FILM

1. SCOPE

1.1 This specification covers one type of plastic film overboot (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

STANDARDS

FEDERAL

FED-STD-123 - Marking For Domestic Shipment (Civilian Agencies).

Fed. Test Method STD. 601 - Rubber, Sampling and Testing.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

DRAWINGS

US ARMY ARMAMENT COMMAND

EDGEWOOD ARSENAL

136-301-69 - Overboot, Plastic Film.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

FSC 4240

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:59Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Materials and components.

3.1.1 Materials. All materials cited in Figure 1 (Drawing 136-301-69) shall conform to the specifications listed thereon, or to the specific characteristics set forth on the drawings.

3.1.2 Components. All components for the overboot shall conform to the specifications listed on Figure 1 (Drawing 136-301-69).

3.2 Manufacture and assembly. The overboot shall be manufactured and assembled in accordance with Figure 1 (Drawing 136-301-69).

3.2.1 Put-up.

3.2.1.1 Roll. The overboots shall be put-up as a roll of 24 individual overboots placed on a continuous length of tissue paper. The overboots shall be placed consecutively and as close together as practical to attain a minimum roll diameter.

3.2.1.2 Core. The overboots shall be furnished on a core with a length equal to or up to 1/8 inch greater than the width of the overboot roll. (See Figure 1). Unless otherwise specified (see 6.2), the inside diameter of the core shall be 1-1/2 inches ± 10 percent.

3.3 Strength of heat seal bond. The strength of the heat seal bond of the polyethylene surface of the laminated plastic shall be no less than 12 pounds per inch width when tested in accordance with 4.4.4.1.

3.4 Preproduction. Prior to the start of regular production a pre-production sample of overboots shall be produced in accordance with this specification for examination and tests (see 4.3).

3.5 Workmanship. The overboot shall be free from damage (cuts, tears, abrasions, or punctures) and foreign matter (dirt, grease, or oil). The seams shall be uniform, continuous, and free from wrinkles or bubbles.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.

4.1.1 Supplier's responsibility. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:59Z
Check the source to verify that this is the current version before use.

other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.2 Objective evidence. The supplier shall provide objective evidence acceptable to the contracting officer that the requirements of 3.1, 3.2 and section 5 for which specific inspection has not been provided in this specification have been satisfied.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

(a) Preproduction inspection (see 4.3).

(b) Quality conformance inspection (see 4.4).

4.3 Preproduction inspection.

4.3.1 Sample. A preproduction sample of 1 roll (24 overboots) shall be manufactured using the same methods, materials, equipment and processes as will be used during regular production.

4.3.2 Inspection procedure. The preproduction sample of overboots shall be examined and tested for conformance to all the requirements of this specification.

4.3.3 Acceptance/rejection criteria. The preproduction sample shall comply with the examinations and tests specified in 4.3.2 to be acceptable. The supplier shall obtain written approval from the contracting officer prior to proceeding with regular production.

4.4 Quality conformance inspection.

4.4.1 Lotting. A lot shall consist of the overboots produced by one manufacturer, at one plant, from the same materials, under essentially the same manufacturing conditions. However, no more than one lot of polypropylene-polyethylene film shall be represented in any one lot of finished overboots.

4.4.2 Sampling.

4.4.2.1 For examination. Sampling shall be conducted in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:59Z
Check the source to verify that this is the current version before use.

4.4.2.2 For destructive test. Sampling shall be conducted in accordance with MIL-STD-105.

4.4.3 Inspection procedure.

4.4.3.1 For examination. Sample overboots shall be examined in accordance with the classification of defects (4.4.3.3) and MIL-STD-105.

4.4.3.2 For destructive tests. Sample overboots shall be tested in accordance with 4.4.4.1 and MIL-STD-105, using an AQL of 1.0 percent defective.

4.4.3.3 Classification of defects.

(a) Overboot, plastic film (Figure 1, Drawing 136-301-69).

Categories		Defects
Critical:		None defined
Major:	AQL 1.0 percent defective	
101		Polyethylene surface bonded
102		Dimensions
103		Assembly
104		Continuity of heat seal
105		Twine missing
106		Length of twine
107		Workmanship (3.5)
108		Type of twine incorrect
109		Number of boots per roll incorrect


4.4.4 Tests.

4.4.4.1 Strength of heat seal bond. The strength of the heat seal bond of the polyethylene surface of the laminated plastic film shall be determined as specified in method 4311, Fed. Test Method STD. 601.

5. PREPARATION FOR DELIVERY

5.1 Interplant Shipment (see 6.3). The overboot shall be packaged and packed to prevent damage in shipment from the supply source to the first receiving activity for immediate use or further processing. Shipping containers shall be in compliance with the rules and regulations applicable to the mode of transportation.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:59Z
Check the source to verify that this is the current version before use.

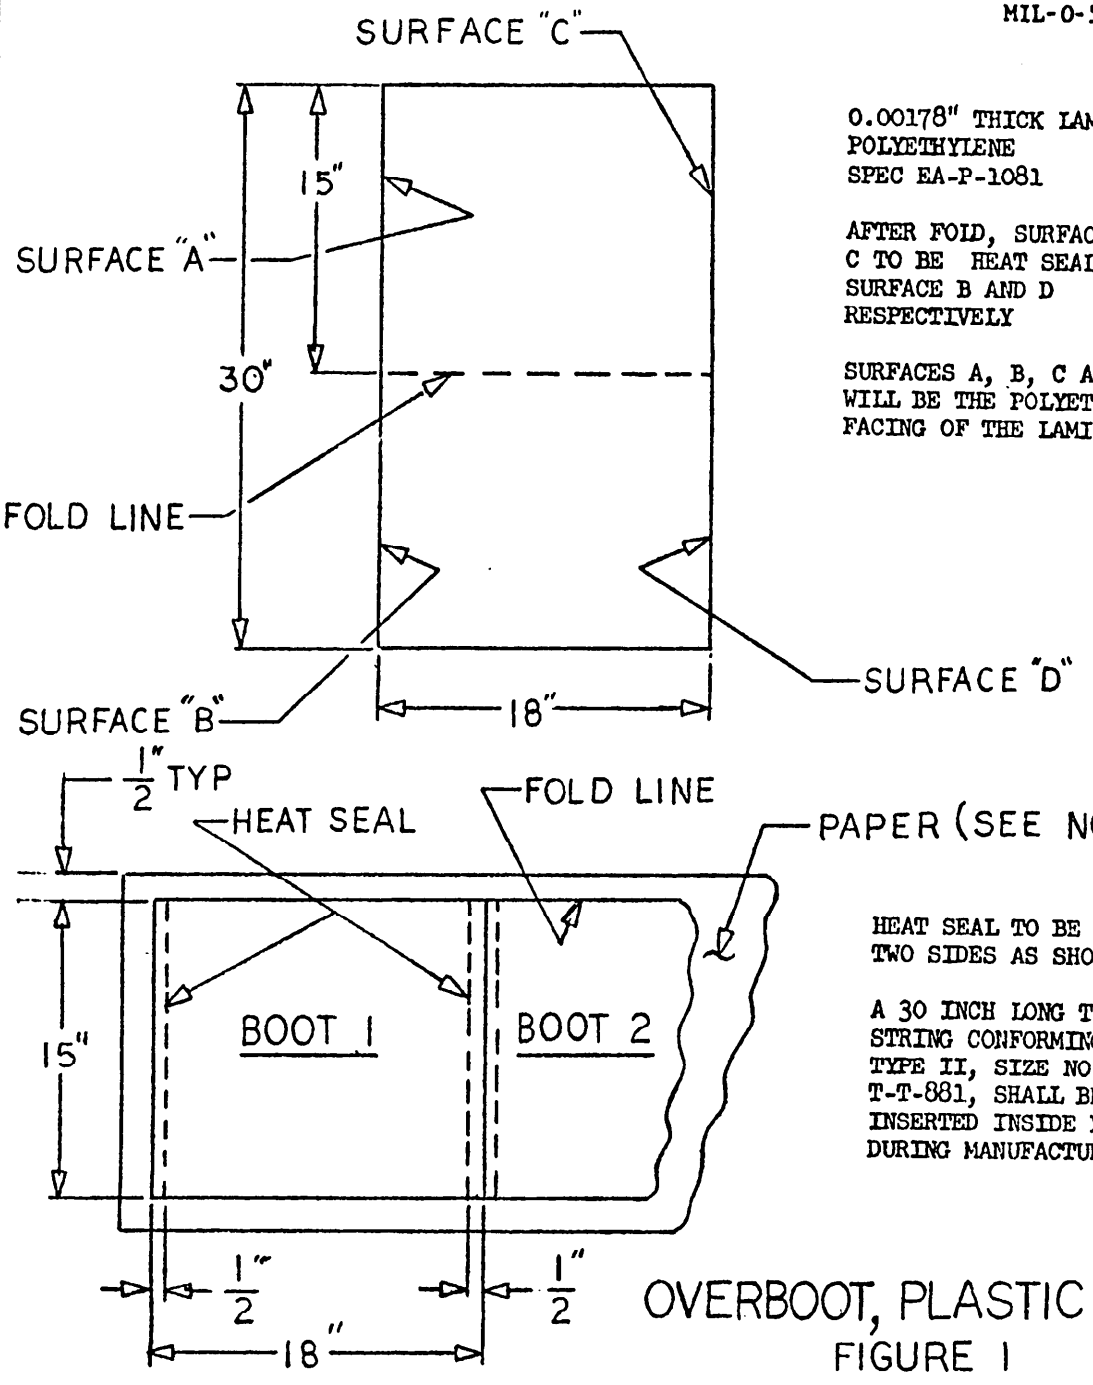

0.00178" THICK LAMINATED POLYETHYLENE
SPEC EA-P-1081

AFTER FOLD, SURFACE A AND C TO BE HEAT SEALED TO SURFACE B AND D RESPECTIVELY

SURFACES A, B, C AND D WILL BE THE POLYETHYLENE FACING OF THE LAMINATE

HEAT SEAL TO BE 1/2" ON TWO SIDES AS SHOWN

A 30 INCH LONG TWINE STRING CONFORMING TO TYPE II, SIZE NO. 15 OF T-T-881, SHALL BE INSERTED INSIDE BOOT DURING MANUFACTURE

OVERBOOT, PLASTIC FILM
FIGURE 1

NOTE: PAPER, WRAPPING, TISSUE, UU-P-553, TYPE 1, CLASS 2, 10# BASIC WEIGHT

PART OF	US ARMY EDGEWOOD ARSENAL
MIL-O-51401	FIGURE DRAWING
	136-301-69

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:59Z
Check the source to verify that this is the current version before use.

5.2 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with FED-STD-123, and shall include the contract or purchase order number, and the name and address of the prime contractor.

5.3 Repair Part. When this item is procured for storage and issue as a repair part, preservation, packaging, packing, and marking shall be as specified on the repair part packaging data sheet which is identified by the Federal Stock Number.

6. NOTES

6.1 Intended use. The overboots are intended to be used as protective footwear in conjunction with various collective protection equipment.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Inside diameter of core.
(c) Preproduction.

(1) Time allowed for supplier submission of samples for Government test and evaluation after award of contract.
(2) Name and address of test facility and shipping instructions when testing is performed by the Government.
(3) Time required for the Government to notify the supplier whether or not to proceed with production.

6.3 Interplant shipment. Packaging and packing for interplant shipment is for supplies and material that do not enter the military supply system. Typical interplant shipments are shipments from a vendor to a contractor, or from a supplier to a military arsenal or plant.

6.4 Supersession data. This specification supersedes Edgewood Arsenal Purchase Description EA-O-1086, dated 17 June 1971.

Custodian:

Army - EA

Preparing activity:

Army - EA

Project No. 4240-A636

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:59Z
Check the source to verify that this is the current version before use.

None defined

Critical:

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:59Z
Check the source to verify that this is the current version before use.

two from each of three test slabs, shall be taken. Without coring, for hardness

FOLD

POSTAGE AND FEES PAID

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
Edgewood Arsenal
ATTN: SAREA-MI-CS
Aberdeen Proving Ground, MD 21010

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:59Z
Check the source to verify that this is the current version before use.