MILITARY STANDARD

MIL-STD-1320-112A
(NAVY)


3 AUGUST 1976

SUPERSEDING
MIL-STD-1320-112 (NAVY)
8 FEBRUARY 1973

TRUCKLOADING
BOMB 500 LB. MK 82 MOD 2
(THERMALLY PROTECTED)
ON PALLET, MHU-122/E
FLEET ISSUE UNIT LOAD

UNIT LOAD DATA

UNIT LOAD DRAWING	WR-54/239
LENGTH	61 3/8
WIDTH	35
HEIGHT	29
CUBE	36.1 CU FT
WEIGHT	3089 LBS
WEIGHT OF BOTTOM FRAME	108 LBS
DOT HAZARD CLASSIFICATION	EXPLOSIVES A

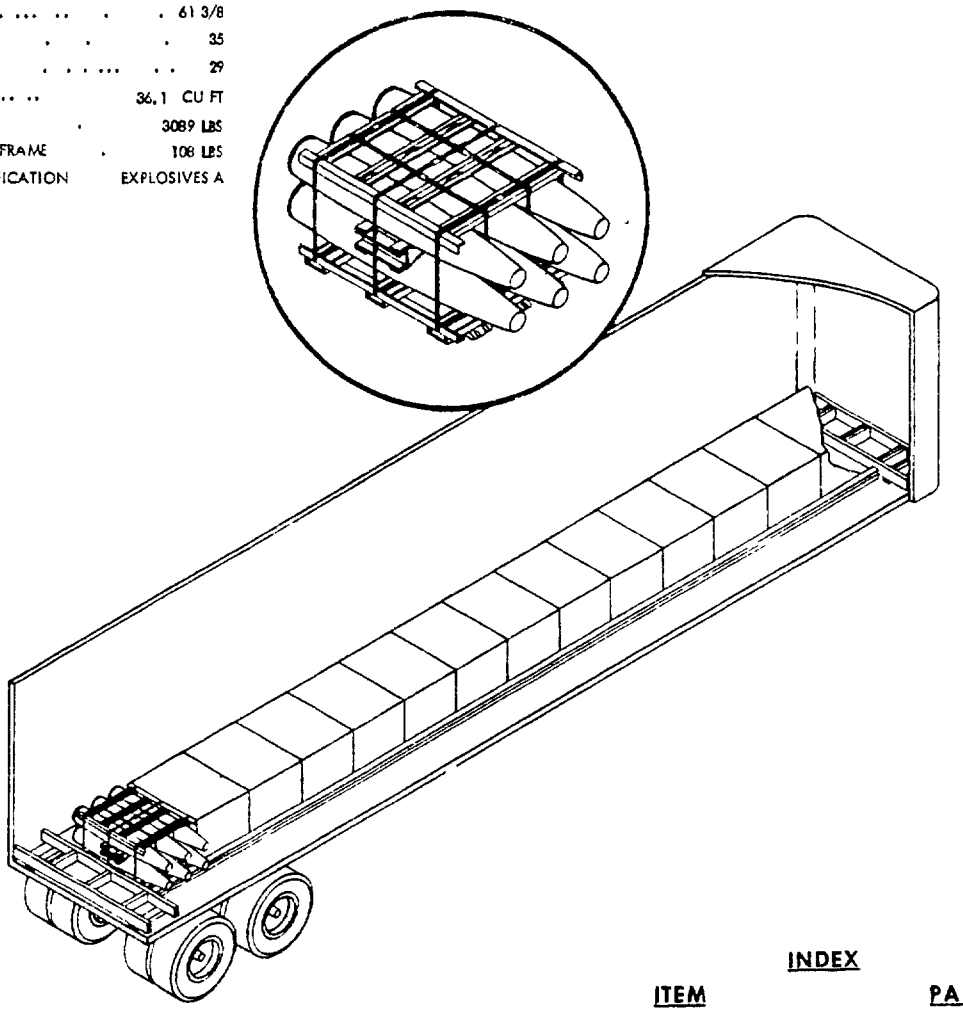

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL 40 FT TRAILER (VAN)	2 & 3
LTL 40 FT TRAILER (VAN)	4 & 5

NOTES
1 UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2 FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY)

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENTS ONLY

M.J. Gray NWHC 8/3/76
TECHNICAL DIRECTION AGENT (TDA) DATE

J.E. Kelly 8-9-76
AIR SYSCOM BY DIRECTION DATE

ORIGINATOR Charles McBride 8/3/76 DATE
NAVAL WEAPONS HANDLING LABORATORY
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:44Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1 THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING FLEET ISSUE UNIT LOADS OF 500 LB MK B2 THERMALLY PROTECTED GENERAL PURPOSE BOMBS THE BOMBS ARE IN THE LOADING AND STORAGE PALLET MHU-122/E AND ARE PALLETIZED IN ACCORDANCE WITH WR-54/239 NO OTHER LOADS ARE AUTHORIZED TO BE SHIPPED IN ACCORDANCE WITH THIS DOCUMENT

2 THE PROCEDURES AND PRACTICES DESCRIBED HEREIN ARE INTENDED FOR 40, 42, 44 & 45 FT VAN TRAILERS AND 40 & 42 FT FLATBED TRAILERS THE TRAILERS MAY HAVE NAILABLE OR NON-NAILABLE FLOORS ALL TRAILERS SHALL HAVE THEIR AXLES LOCATED IN THE "WESTERN" POSITION (AT THE EXTREME REAR OF THE TRAILER)

3 THE TRUCKLOAD SHOWN ON PAGE 7 PROVIDES FOR AN INCREASED LOAD WHICH PRODUCES HEAVIER GROSS TANDEM AXLE WEIGHTS AND GROSS VEHICLE WEIGHT THESE INCREASED WEIGHTS ARE NOT AUTHORIZED IN ALL 50 STATES BEFORE LOADING IN THIS CONFIGURATION DETERMINE THAT THE ROUTING IS THROUGH STATES PERMITTING 34,000 LBS ON TANDEM AXLES AND GROSS VEHICLE WEIGHT OF 80,000 LBS

4 ALL TRUCKLOADS SHOWN IN THIS DOCUMENT ARE SUITABLE FOR "STANDARD WEIGHT" TRACTOR-TRAILERS (APPROXIMATE TARE WEIGHT OF TRAILER TANDEMS 7,800 LBS AND OF THE DRIVE TANDEM AXLES 11,500 LBS)

5 THE FILLER ASSEMBLIES SHALL FILL THE VOID BETWEEN THE UNIT LOADS AND THE TRAILER SIDE WALLS THEY SHALL BE SECURED IN PLACE TO PREVENT LONGITUDINAL MOVEMENT

WARNING

THE USE OF FILLER ASSEMBLIES WHEN SHIPPING THE HEAVIER FTL'S MAY CAUSE THE VEHICLE TO BE OVERWEIGHT GROSS VEHICLE WEIGHTS AND AXLE WEIGHTS SHOULD BE COMPUTED PRIOR TO LOADING

6. THE REAR BLOCKING ASSEMBLY SHALL BEAR AGAINST THE LADING AND THE TRAILER DOORS WHEN THE DOORS ARE CLOSED

WARNING

DO NOT USE TRAILERS WITH ROLL UP DOORS WHEN BLOCKING BY THIS METHOD

7 CHAINS AND STEEL STRAPS MAY BE USED INTERCHANGEABLY FOR TIE-DOWNS ON A 1 TO 1 BASIS

8 STEEL STRAPS SHALL BE 2 X .050 AND APPLIED AS SPECIFIED BY THE LOAD STRAPPING REQUIREMENTS SHOWN ON PAGE 6

9. CHAINS AND LOAD BINDERS SHALL MEET THE FOLLOWING CONDITIONS
   - A CHAINS AND FITTINGS SHALL BE 3/8 INCH AND LOADBINDERS 3/8 INCH CAPACITY
   - B CHAINS, FITTINGS AND LOADBINDERS SHALL HAVE A MINIMUM SAFE WORKING LOAD OF 5000 LBS
   - C LOADBINDERS SHALL BE SAFETY WIRED WITH 16 GAUGE SOFT ANNEALED IRON WIRE OR SECURED USING THE END PIECE OF THE 3/8 CHAIN

10 PRIOR TO LOADING THE TRAILER AND DURING THE PRELOADING INSPECTION REQUIRED BY OP 2165 AND REPORTED ON DD FORM 626, THE CHAINS, FITTINGS AND LOADBINDERS SHALL BE INSPECTED FOR STRETCH, GOUGING, BENT LINKS WEAR AND ANY OTHER NOTICEABLE DEFECTS THE INSPECTOR SHALL CONFIRM THAT THE CHAINS AND LOADBINDERS HAVE BEEN INSPECTED AND SHALL SO NOTE IN ITEM NO 22 OF DD FORM 626 ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A CHAIN OR LOADBINDER

11 THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS

12 AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS TO TRAILER IN AN ACCESSIBLE AREA, AND ATTACH "EXPLOSIVES A" PLACARD TO BOTH SIDES, FRONT AND BACK OF TRAILER

13 APPLICABLE MATERIAL SPECIFICATIONS DUNNAGE LUMBER, MM-L-751, NAILS, FF-N-105, TYPE II, STYLE 10, COMMON BRIGHT, STRAPPING QQ-S-781, TYPE I, CLASS A

14 FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY)

FTL-SINGLE ROW (44 & 45 FT VANS)

1 THIS TRUCKLOAD IS AUTHORIZED FOR A FTL (14 UNIT LOADS) ARRANGED IN A SINGLE ROW PATTERN EITHER VANS HAVING FLOORS OF WOOD, METAL OR METAL WITH WOOD NAILING STRIPS MAY BE USED


2 ONLY 44 & 45 FT VANS WILL ACCOMMODATE THE FTL OF 14 UNIT LOAD ARRANGED IN A SINGLE ROW PATTERN WHEN 44 OR 45 FT VANS ARE NOT AVAILABLE, USE THE TRUCKLOAD SHOWN ON PAGE 5 TO SHIP 14 UNIT LOADS

3 THE FRONT BULKHEAD, DETAIL A, IS FOR 44 FT TRAILERS WHEN LOADING 45 FT TRAILERS, INCREASE THE DEPTH OF THE BULKHEAD FROM 20 TO 26 INCHES

4 DETAIL B MAY BE OF "SOLID FILL" CONSTRUCTION WHEN SPACE AT REAR OF LOAD IS LESS THAN 12 INCHES

5. IF THE TRAILER HAS ALL METAL FLOORS OR METAL FLOORS WITH WOOD NAILING STRIPS THAT ARE POSITIONED WRONG FOR NAILING, USE FILLER ASSEMBLY DETAIL D, PAGE 4, TO CONTROL LATERAL MOVEMENT OF LADING


* TW = TRAILER WIDTH

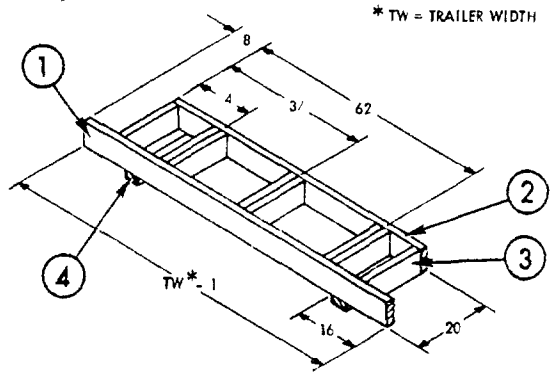

DETAIL A

FRONT BULKHEAD (44 FT TRAILER)
(SEE FTL NOTE 3, PAGE 2)
(1 REQUIRED)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:44Z
Check the source to verify that this is the current version before use.

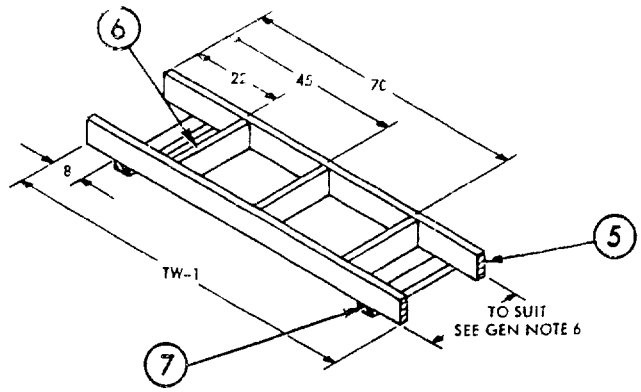


DETAIL B

REAR BLOCKING ASSEMBLY
1 REQUIRED
SEE FTL NOTE 4

NOTE


THE TRUCKLOAD SHOWN BELOW IS FOR A 44 FT VAN WITH A WOOD FLOOR FOR 45 FT VANS SEE FTL NOTE 3 FOR VANS WITH NON-NAILABLE FLOORS, SEE FTL NOTE 5

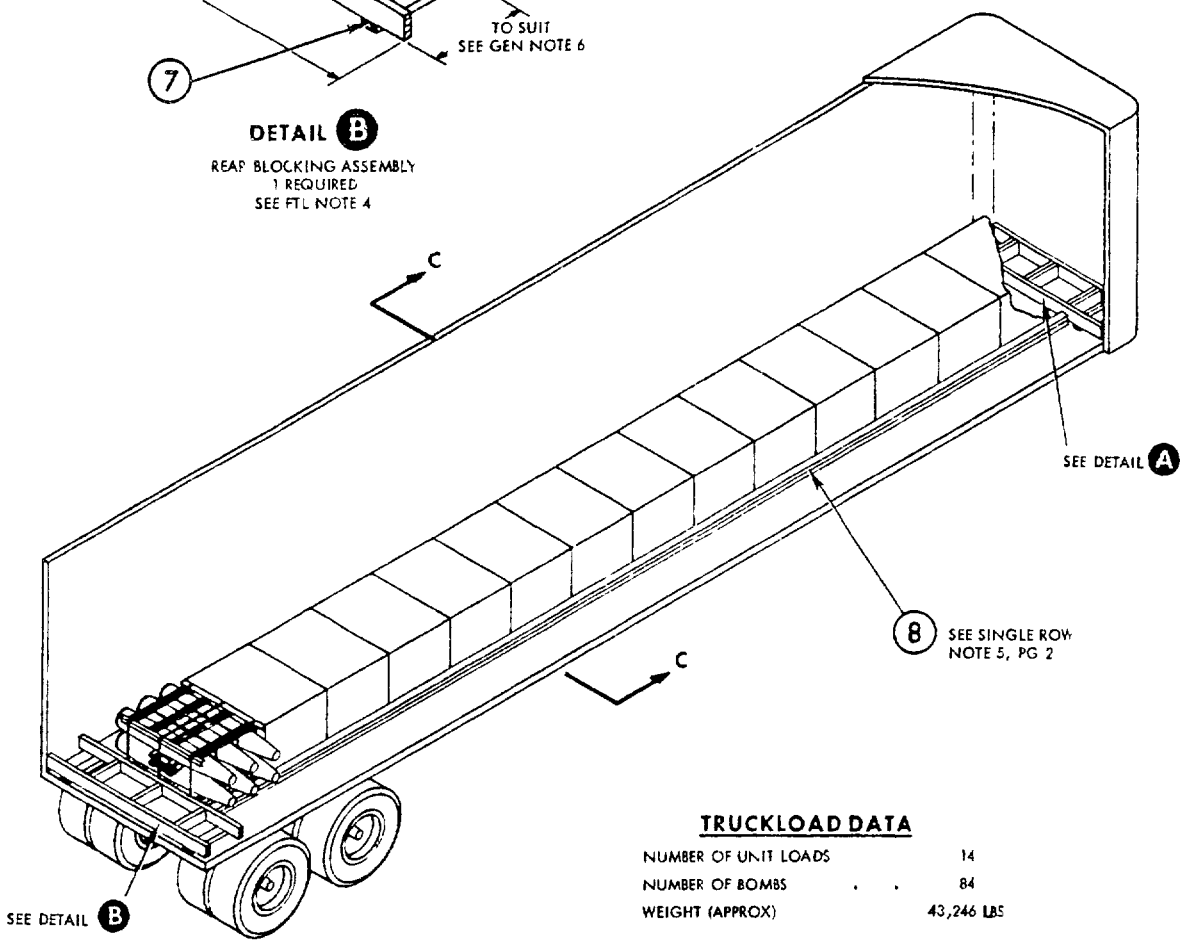

TRUCKLOAD DATA

NUMBER OF UNIT LOADS	14
NUMBER OF BOMBS	84
WEIGHT (APPROX)	43,246 LBS

*TW = TRAILER WIDTH

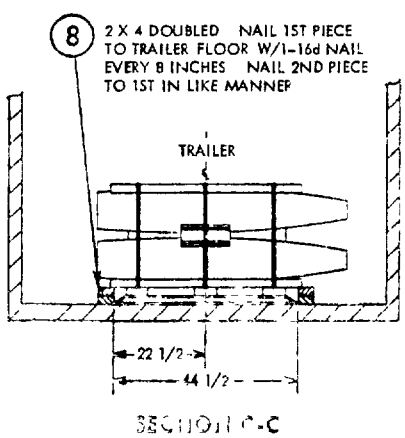

SECTION C-C

PIECE NO.	DESCRIPTION	SIZE	NO OF PIECES REQ'D	NAIL TO	NUMBER NAILS	SIZE
8	SLEEPER	2 X 4 X AS REQ'D	164 FT	SEE SECTION C-C		
7	SUPPORT	2 X 4 TO SUIT	2	5	2/JOINT	16d
6	STRUT	2 X 6 TO SUIT	3	SEE 5	-	-
5	CROSSMEMBER	2 X 6 X TW* 1	2	6	3/JOINT	16d
4	SUPPORT	2 X 4 X 20	2	1 & 2	2/JOINT	16d
3	STRUT	2 X 6 X 17	8	SEE 1 & 2	-	-
2	FWD CROSSMEMBER	2 X 6 TO SUIT	1	3	3/JOINT	16d
1	AFT CROSSMEMBER	2 X 6 X TW* 1	1	3	3/JOINT	16d

LIST OF MATERIALS & NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:44Z
Check the source to verify that this is the current version before use.


FTL-DOUBLE ROW PATTERN (40, 42, 44 & 45 FT VANS) 14 UNIT LOADS

1 THIS TRUCKLOAD IS AUTHORIZED FOR A FTL (14 UNIT LOADS) ARRANGED IN A DOUBLE ROW PATTERN EITHER "STANDARD OR LIGHT-WEIGHT" VANS HAVING FLOORS OF WOOD, METAL OR METAL WITH WOOD NAILING STRIPS MAY BE USED


2 THE DEPTH OF THE FRONT BULKHEAD, DETAIL F, VARIES WITH THE LENGTH OF THE TRAILER BEING LOADED THE BULKHEAD SHALL BE CONSTRUCTED AS SPECIFIED BY DETAIL F AND TABLE I

3 IF THE TRAILER HAS ALL METAL FLOOR OR METAL FLOOR WITH WOOD NAILING STRIPS THAT ARE LOCATED WRONG FOR NAILING, USE FILLER ASSEMBLY DETAIL D TO CONTROL LATERAL MOVEMENT OF LADING

4 WHEN SPACE AT THE REAR OF THE LOADED TRAILER PERMITS AND THE TRAILER HAS A NAILABLE FLOOR, DETAIL G IS AN AUTHORIZED ALTERNATE TWO KNEE BRACES ARE REQUIRED FOR EACH UNIT LOAD (4 TOTAL), WITH THE BRACE AGAINST THE 1ST AND 3RD BOMBS OF THE BOTTOM LAYER OF THE UNIT LOAD NAIL BRACE TO TRAILER FLOOR WITH 8-16d NAILS

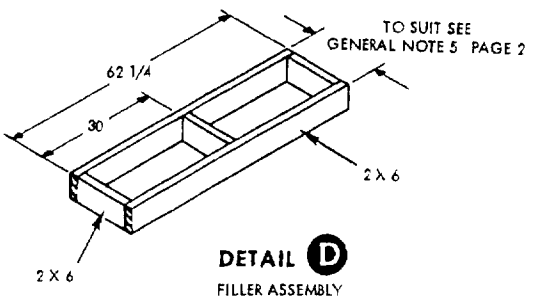


DETAIL D
FILLER ASSEMBLY
SEE NOTE 3, PAGE 4

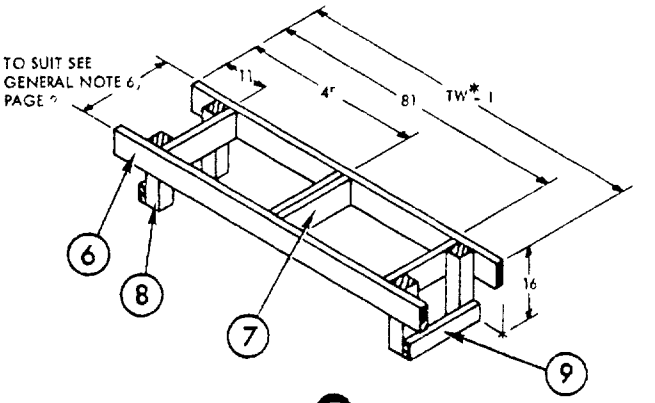

DETAIL E
REAR BLOCKING ASSEMBLY
1 REQUIRED


TABLE I

LENGTH OF TRAILER	DIMENSION "X"
40 FT	9
42 FT	21
44 FT	34
45 FT	40

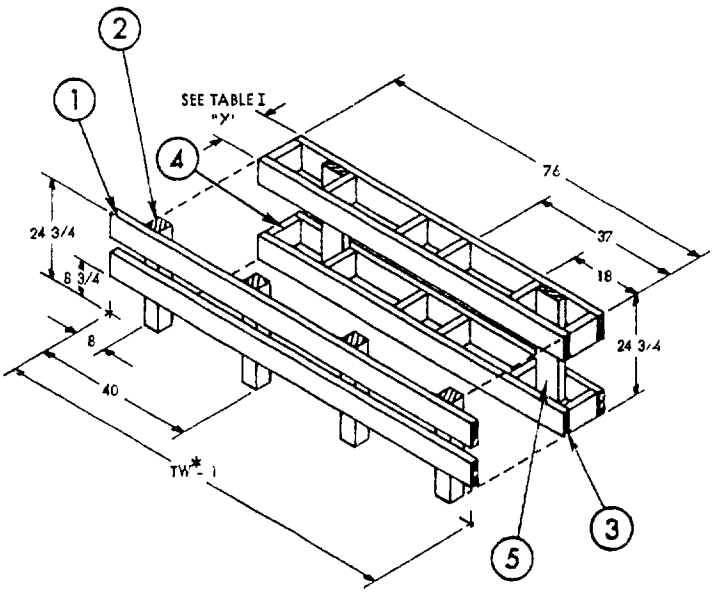


DETAIL F
FRONT BULKHEAD
1 REQUIRED
SEE NOTE 2, PAGE 4

* TW = TRAILER WIDTH



DETAIL G
KNEE BRACE
ALTERNATE REAR BLOCKING
SEE NOTE 4, ABOVE


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:44Z
Check the source to verify that this is the current version before use.

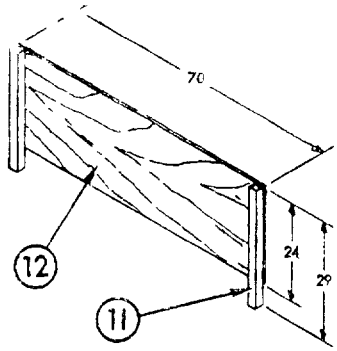

DETAIL H
SEPARATOR GATE
6 REQUIRED

NOTE

THE TRUCKLOAD SHOWN BELOW IS FOR VANS WITH WOOD FLOORS FOR VANS WITH NON-NAILABLE FLOORS SEE NOTE 3, PAGE 4

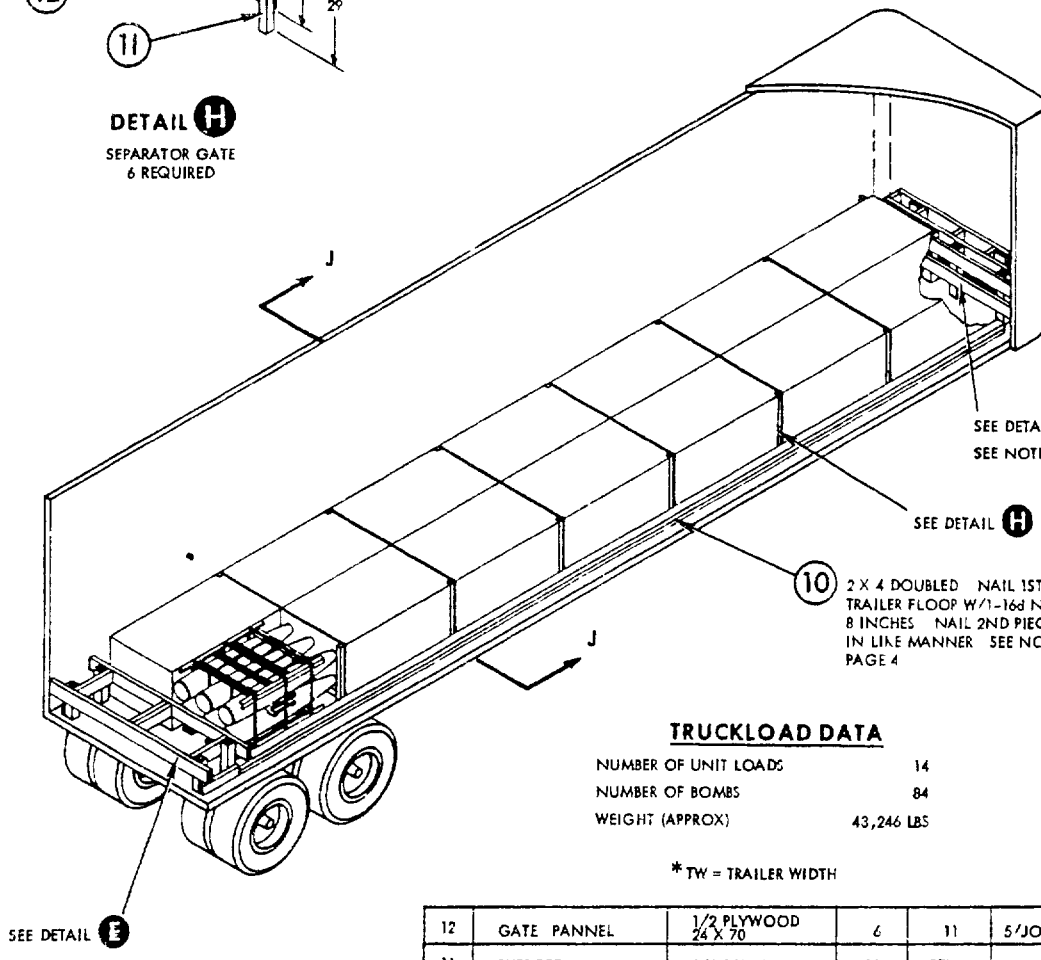


10 2 X 4 DOUBLED NAIL 1ST PIECE TO TRAILER FLOOR W/1-16d NAIL EVERY 8 INCHES NAIL 2ND PIECE TO 1ST IN LIKE MANNER SEE NOTE 3, PAGE 4

TRUCKLOAD DATA

NUMBER OF UNIT LOADS	14
NUMBER OF BOMBS	84
WEIGHT (APPROX)	43,246 LBS

* TW = TRAILER WIDTH

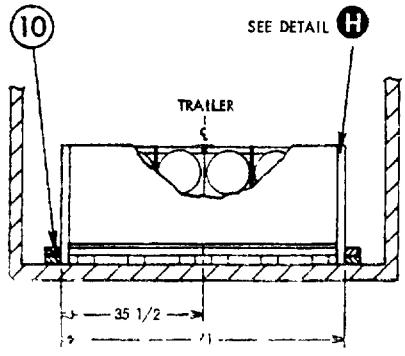

SECTION J J

PIECE NO	DESCRIPTION	SIZE	NO OF PIECES REQ'D	NAIL TO	NUMBER NAILS	SIZE
12	GATE PANNEL	1/2 PLYWOOD 24 X 70	6	11	5/JOINT	6d
11	SUPPORT	2 X 2 X 29	12	SEE 12	-	-
10	SLEEPER	2 X 4 X AS REQ'D	146 FT	SEE FIELD NOTE		
9	TIE	2 X 4 TO SUIT	2	8	2/JOINT	12d
8	LEG	4 X 4 X 6	4	SEE 6 & 7	-	-
7	STRUT	2 X 6 TO SUIT	4	SEE 6	-	-
				6	2/JOINT	16d
6	CROSSMEMBER	2 X 6 X TW* 1	2	7	2/JOINT	16d
				8	3/JOINT	16d
5	SUPPORT	2 X 6 X 24 3/4	2	3	3/JOINT	16d CLIN
4	STRUT	2 X 6 TO SUIT	12	SEE 3	-	-
3	CROSSMEMBER	2 X 6 X 76	4	4 & 2	3/JOINT	16d
2	VERTICAL	4 X 4 X 24 3/4	4	SEE 1 & 3	-	-
1	AFT CROSSMEMBER	2 X 6 X TW* 1	2	2	3/JOINT	16d

LIST OF MATERIALS & NAILING DATA

FTL DBL ROW (14 UNIT LOADS)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:44Z
Check the source to verify that this is the current version before use.

FTL-DBL PLUS 1 PATTERN (42, 44 & 45 FT VANS) 15 UNIT LOADS

1 THIS TRUCKLOAD IS AUTHORIZED FOR A FTL (15 UNIT LOADS) ARRANGED IN A DOUBLE ROW PATTERN PLUS ONE UNIT LOAD CROSSWAYS AT THE REAR OF THE LOAD ONLY LIGHTWEIGHT VANS HAVING FLOORS OF WOOD, METAL OR METAL WITH WOOD NAILING STRIPS MAY BE USED


WARNING

THE EMPTY WEIGHT OF ' LIGHTWEIGHT TRACTOR-TRAILERS SHOULD NOT EXCEED 25,500 LBS OR THE DRIVE AXLES 10,500 LBS


2 THE DEPTH OF THE FRONT BULKHEAD, DETAIL M, VARIES WITH THE LENGTH OF THE TRAILER BEING LOADED THE BULKHEAD SHALL BE CONSTRUCTED AS SPECIFIED BY DETAIL M AND TABLE II

3 IF THE TRAILER HAS ALL METAL FLOORS OR METAL FLOORS WITH WOOD NAILING STRIPS THAT ARE LOCATED WRONG FOR NAILING, USE FILLER ASSEMBLY, DETAIL D, ON PAGE 4 TO CONTROL LATERAL MOTION SEE GENERAL NOTE 5 PAGE 2


4 DETAIL L MAY BE OF "SOLID FILL" CONSTRUCTION WHEN SPACE AT REAR OF LOAD IS LESS THAN 12 INCHES,

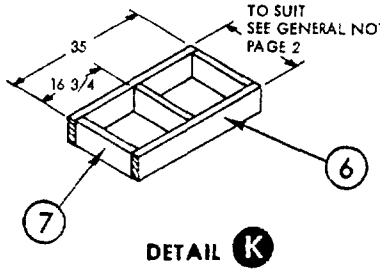

DETAIL K
FILLER ASSEMBLY
2 REQUIRED

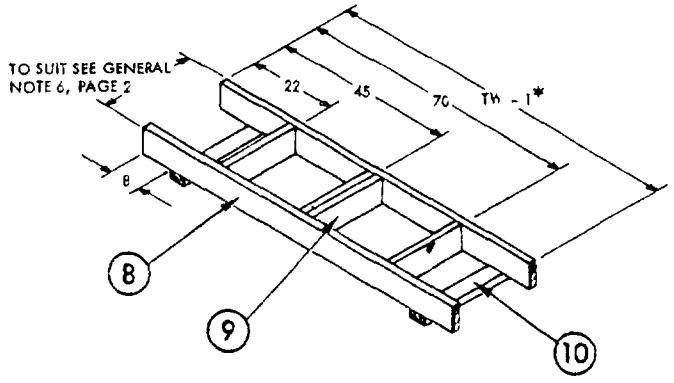

DETAIL L
REAR BLOCKING
1 REQUIRED
SEE NOTE 4 ABOVE

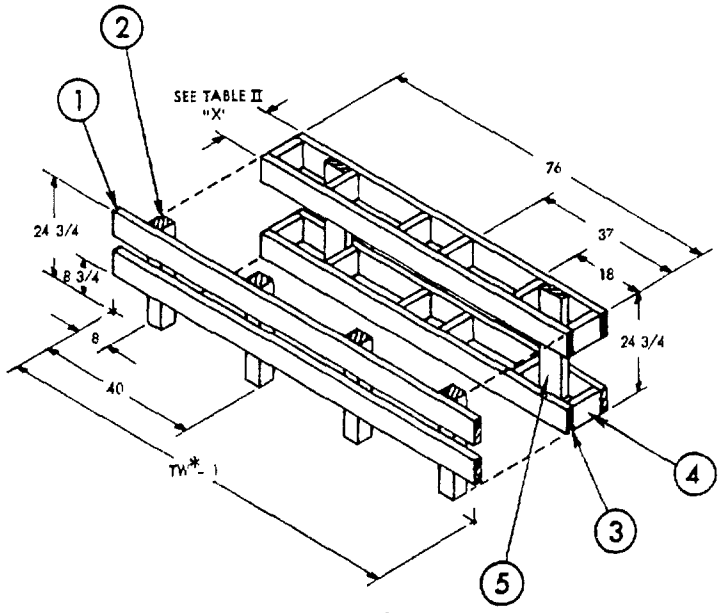


DETAIL M
FRONT BULKHEAD
1 REQUIRED
SEE NOTE 2 ABOVE

TABLE II

LENGTH OF TRAILER	DIMENSION "X
42	10
44	22
45	28

* TW - TRAILER WIDTH


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:44Z
Check the source to verify that this is the current version before use.



DETAIL N
SEPARATOR GATE
7 REQUIRED

NOTE


THE TRUCKLOAD SHOWN BELOW IS FOR VANS WITH NAILABLE FLOORS IF VAN FLOORS ARE NOT NAILABLE SEE NOTE 3 PAGE 6

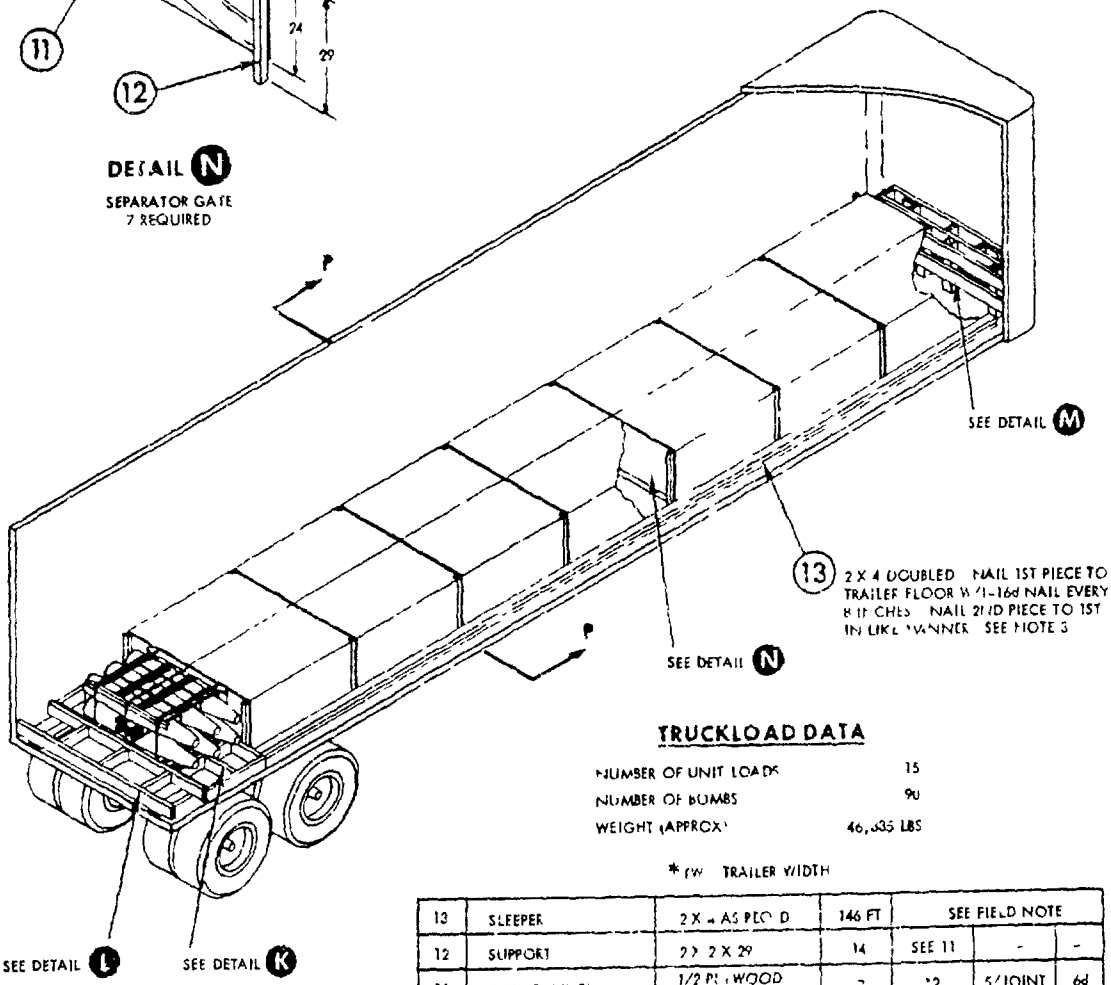

TRUCKLOAD DATA

NUMBER OF UNIT LOADS	15
NUMBER OF BOMBS	90
WEIGHT (APPROX)	46,535 LBS

*TW TRAILER WIDTH

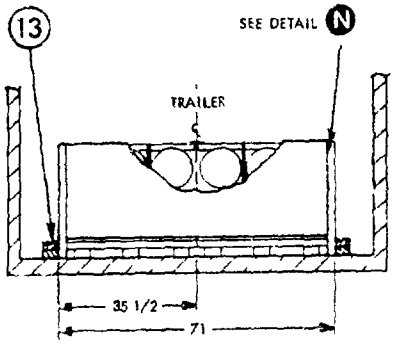


SECTION P-P


PIECE NO	DESCRIPTION	SIZE	NO OF PIECES REQ'D	NAIL TO	NUMBER	SIZE
					NAILS	
13	SLEEPER	2 X 4 AS REQ'D	146 FT	SEE FIELD NOTE		
12	SUPPORT	2 X 2 X 29	14	SEE 11	-	-
11	GATE PANNEL	1/2 PLYWOOD 24 X 70	7	*2	5"JOINT	6d
10	SUPPORT	2 X 4 TO SUIT	2	8	2 JOINT	12d
9	STRUT	2 X 6 TO SUIT	4	SEE 8	-	-
8	CROSSMEMBER	2 X 6 X TW*-1	2	9	3/JOINT	16d
7	STRUT	2 X 6 TO SUIT	6	SEE 6		-
6	LONGITUDINAL	2 X 6 X 35	4	7	3/ JOINT	16d
5	SUPPORT	2 X 6 X 24 3/4	2	3	3"JOINT	16d CLIN
4	STRUT	2 X 6 TO SUIT	12	SEE 3	-	-
3	CROSSMEMBER	2 X 6 X 76	4	4 & 2	3/JOINT	16d
2	VERTICAL	4 X 4 X 24 3/4	4	SEE 1 & 3	-	-
1	AFT CROSSMEMBER	2 X 6 X TW*-1	2	2	3/JOINT	16d

LIST OF MATERIALS & NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:44Z
Check the source to verify that this is the current version before use.

LOAD STRAPPING

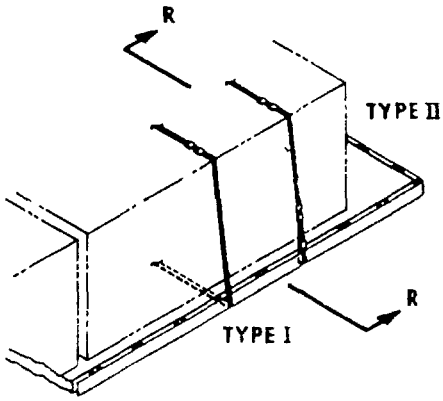

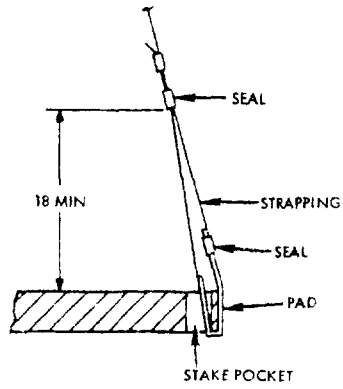

SECTION R-R

THE FOLLOWING TWO METHODS OF TIE-DOWN STRAPPING ARE APPROVED FOR USE WITH THE SHIPMENT OF LOADS ON FLATBED TRAILERS STEEL STRAPPING SHALL BE IN ACCORDANCE WITH FEDERAL SPECIFICATION QQ-S-781 STRAPPING SEALS SHALL HAVE A MINIMUM TENSILE STRENGTH EQUAL TO 75 PER CENT OF THE STRAP STRENGTH FOR EACH OF THE TYPES ILLUSTRATED ABOVE IT IS PREFERRED TO POSITION TENSION, AND DOUBLE CRIMP THE STRAP SEALS AT THE TOP OF THE LOAD, IF PRACTICABLE

TYPE I - CONTINUOUS STRAPPING AROUND THE FLATBED AND THE LOAD

TYPE II - THE STRAPPING IS SECURED TO THE STAKE POCKETS, ONE PIECE ON EACH SIDE OF THE TRAILER, AND IS BROUGHT UP OVER THE LOAD, TENSIONED, AND SEALED WITH TWO DOUBLE-CRIMPED SEALS ON THE TOP METHOD OF SECURING STRAPPING TO STAKE POCKET IS SHOWN IN SECTION R-R THE SHORT END IS ON THE INSIDE AND IS SECURED WITH TWO DOUBLE-CRIMPED SEALS AT A MINIMUM OF 18 INCHES ABOVE THE TRAILER BED A STACK POCKET PAD (A SHORT PIECE OF THE SAME STRAPPING 18 INCHES LONG) IS INSERTED BETWEEN THE MAIN STRAP AND THE STAKE POCKET AND IS SECURED TO THE MAIN STRAP WITH A SEAL AS SHOWN

FTL-DOUBLE ROW PATTERN (40 & 42 FT FLATBED TRAILER)

14 UNIT LOADS

1 THIS TRUCKLOAD IS AUTHORIZED FOR A TFL (14 UNIT LOADS) ARRANGED IN A DOUBLE ROW PATTERN


2 THE LADING SHALL BE COVERED WITH A WATERPROOF, FIRE RESISTANT TARPAULIN THE BEST RESULTS ARE OBTAINED IF THE UNIT LOADS ARE COVERED WITH THE TARPAULIN PRIOR TO APPLYING THE TIE-DOWN CHAINS OR STRAPS PROTECTOR BOARDS SHALL BE USED BETWEEN THE TIE-DOWNS AND THE TARPAULIN

3 POSITION THE FORWARD UNIT LOADS 22 INCHES FROM THE FRONT OF 40 FT TRAILERS AND 34 INCHES FROM THE FRONT OF 42 FT TRAILERS

4 POSITION PROTECTOR BOARD, PIECE 7, AND HOLD DOWN CHAIN OR STRAPS OVER THE "HARD POINTS" OF THE UNIT LOADS.


5 CHAIN AND 2 INCH STRAPS MAY BE USED INTERCHANGEABLY ON A 1 TO 1 BASIS

6 STEEL STRAPS SHALL BE 2 X 050 AND APPLIED AS SPECIFIED BY THE LOAD STRAPPING REQUIREMENTS SHOWN ABOVE

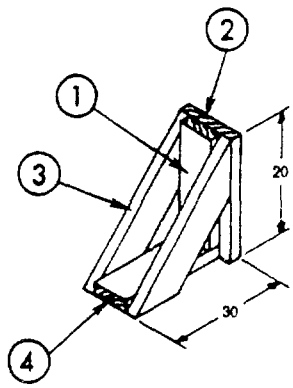

DETAIL S
KNEE BRACE
12 REQUIRED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:44Z
Check the source to verify that this is the current version before use.

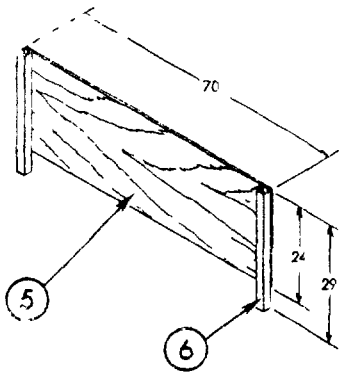


DETAIL T
SEPARATOR GATE
6 REQUIRED

NOTE
TARPAULIN OMITTED FOR CLARITY


NOTE
LOAD ALL UNITS LOADS WITH BOMB NOSES FORWARD

NOTE
THIS LOAD ILLUSTRATES THE USE OF CHAINS AS TIEDOWNS STEEL STRAPS MAY ALSO BE USED SEE GENERAL NOTES 7 & 8

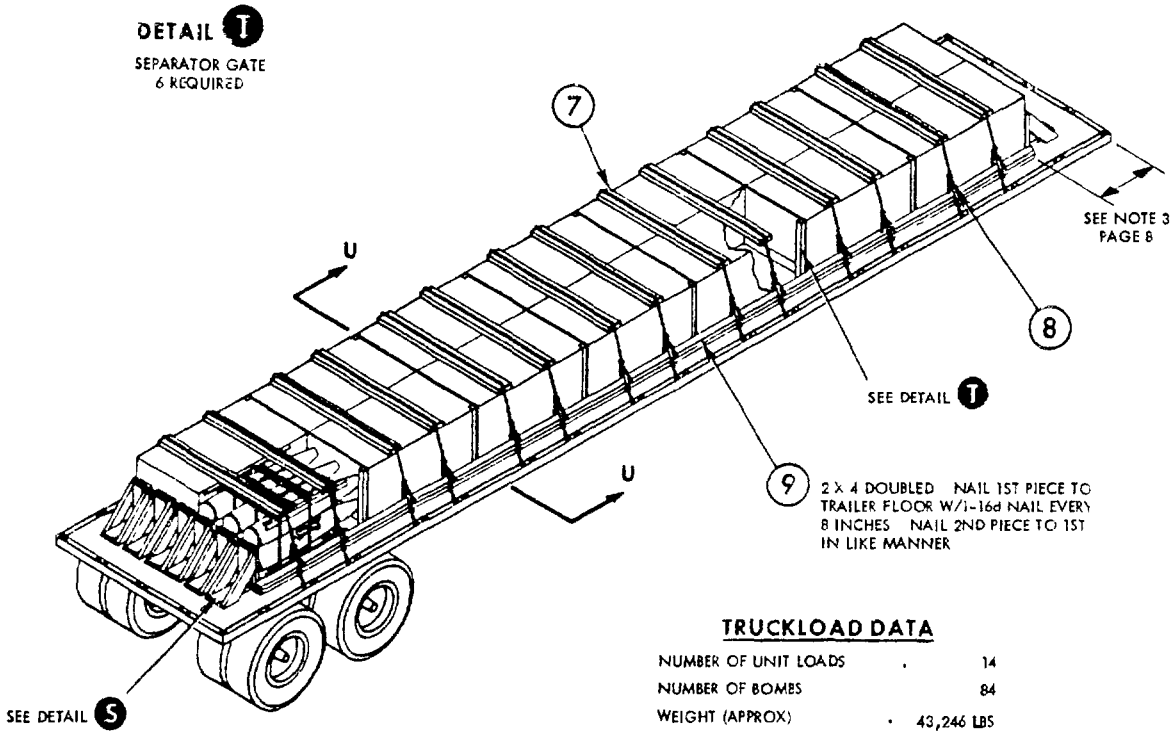

TRUCKLOAD DATA

NUMBER OF UNIT LOADS	14
NUMBER OF BOMBS	84
WEIGHT (APPROX)	43,246 LBS

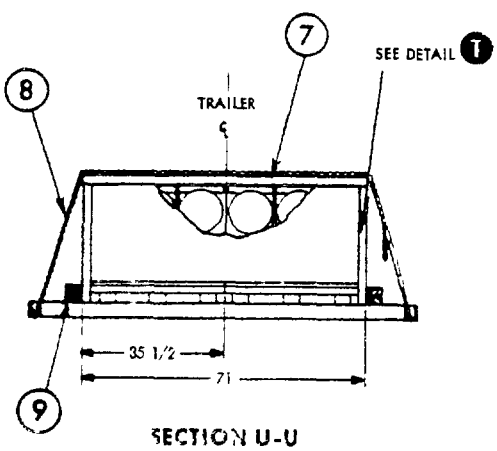

SECTION U-U

PIECE NO	DESCRIPTION	SIZE	NO OF PIECES REQ'D	NAIL TO	NUMBER	SIZE
					NAILS	
9	SLEEPER	2 X 4 AS REQ'D	146 FT	SEE FIELD NOTE		
8	CHAIN & LOADBINDER	3/8 CAPACITY	14	-	-	-
7	PROTECTOR BOARD	2 X 6 X 70	14	-	-	-
6	SUPPORT	2 X 2 X 2⁰	12	SEE 5	-	-
5	GATE PANNEL	1/2 PLYWOOD 24 X 70	6	6	5/JOINT	6d
4	BRACE, CLEAT	2 X 6 X 18 1/2	12	TRAILER FLOOR	6	16d
3	BRACE DIAGONAL	2 X 6 TO SUIT	24	1 & 4	4/JOINT	16d
2	BRACE BACKUP	2 X 10 X 20	12	4	4	16d
1	BRACE UPRIGHT	2 X 6 X 18 1/2	12	2	6	10d

LIST OF MATERIALS & NAILING DATA

FTI -40 & 42 FT FLATBED TRAILER

REVIEW ACTIVITY
NAVY: OS, AS

PREPARING ACTIVITY
NAVY OS
(PROJECT NUMBER 8140-N340)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-STD-1320-112A (NAVY)

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:44Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
DOD 316

Naval Weapons Station Earle (803 R. Harris)
Colts Neck, N.J. 07722

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:44Z
Check the source to verify that this is the current version before use.