MILITARY STANDARD

MIL-STD-1320-193 (NAVY)


22AUGUST 1979

TRUCKLOADING

TORPEDO MK 37 MOD 3
MAIN ASSEMBLY
IN CONTAINER MK 258 MOD 0

CONTAINER DATA

DIMENSIONS	120 15/16 L X 29 1/8 W X 33 1/16 H
STACKING HEIGHT	30 11/16
NET WT	379 LBS
GROSS WT (APPROX)	1369 LBS
CUBE	67.39 CU FT
DOT HAZARD CLASSIFICATION	NONE (INERT)
DWG NO	LD 161995

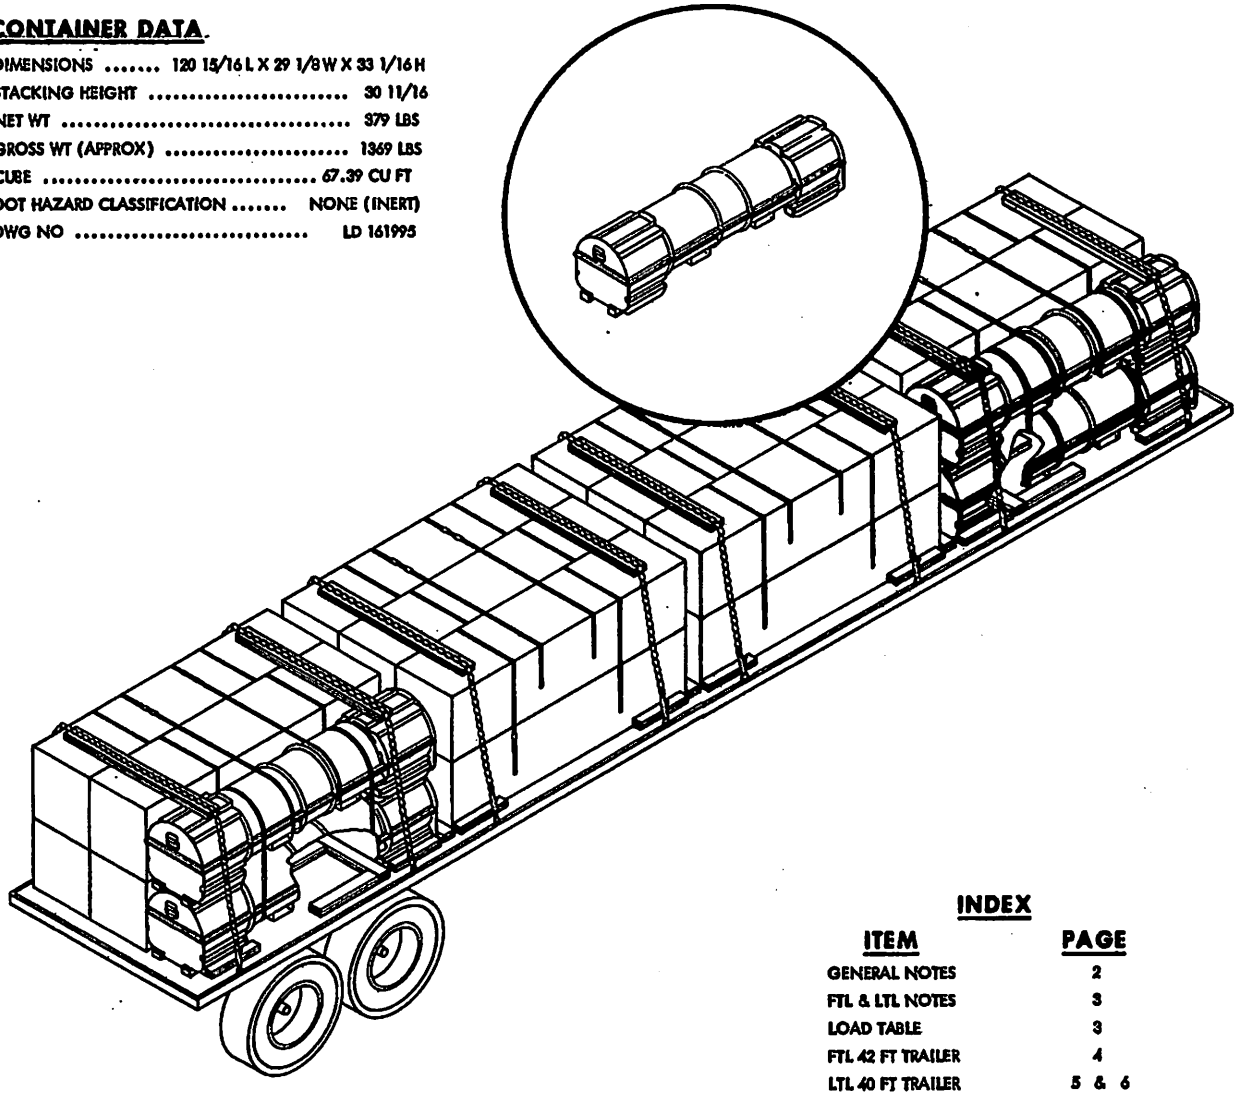

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL & LTL NOTES	3
LOAD TABLE	3
FTL 42 FT TRAILER	4
LTL 40 FT TRAILER	5 & 6
UNITIZING PROCEDURE	7

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENTS ONLY

W.D. Gray Jr USMC 7/3/79
TECHNICAL DIRECTION AGENT (TDA) DATE

L.E. Kelly 7/3/79
SEA SYSCOM BY DIRECTION DATE

ORIGINATOR L.R. Cavings 6/28/79
DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 202610-23T23:46Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING THE TORPEDO MAIN ASSEMBLY MK 37 MOD 3 IN THE CONTAINER MK 258.
2. THE PROCEDURES AND PRACTICES HEREIN ARE INTENDED FOR FLATBED TRAILERS WITH NAILABLE FLOORS. TRAILERS SHALL HAVE THEIR AXLES LOCATED IN THE "WESTERN" POSITION (AT THE EXTREME REAR OF THE TRAILER).
3. STACKED CONTAINERS MUST BE UNITIZED. FOR UNITIZING INSTRUCTIONS REFER TO PAGE 7. WHEN A STACK OF CONTAINERS IS TWO HIGH, THE TOP LAYER SHALL BE SECURED TOGETHER WITH TWO 1 1/4 X .035 CROSS STRAPS. THESE STRAPS ENCIRCLE THE CONTAINERS IN THE TOP LAYER SECURING THEM TOGETHER.
4. STEEL STRAPS USED AS TIEDOWNS SHALL BE 2 X .050 AND SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE BASIC TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY) AND AS SHOWN ON PAGE 5 OF THIS DOCUMENT.
5. CHAINS, FITTINGS AND LOADBINDERS USED AS TIEDOWNS SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE BASIC TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY) AND AS SHOWN ON PAGE 4 OF THIS DOCUMENT.
6. PRIOR TO LOADING THE TRAILER AND DURING THE PRELOADING INSPECTION REQUIRED BY NAVORD OP 2165 AND REPORTED BY DD FORM 626, THE CHAINS, FITTINGS AND LOADBINDERS SHALL BE INSPECTED FOR STRETCH, GOUGING, BENT LINKS, WEAR OR ANY OTHER NOTICEABLE DEFECTS. THE INSPECTOR SHALL CONFIRM THAT THEY HAVE BEEN INSPECTED AND SHALL SO NOTE IN ITEM NO. 22 OF DD FORM 626. ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A CHAIN AND BINDER.
7. CHAINS AND STRAPS MAY BE USED INTERCHANGEABLY FOR TIEDOWNS ON A 1 TO 1 BASIS. WHEN USING CHAIN THE LADING SHALL BE PROTECTED FROM DAMAGE BY THE CHAIN LINKS.
8. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER AS TO THESE LIMITATIONS, AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE LOADED TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
9. AFTER BLOCKING, BRACING AND TIEDOWNS HAVE BEEN INSPECTED ATTACH SHIPPING DOCUMENTS TO THE DUNNAGE IN AN ACCESSIBLE AREA.
10. UNLESS OTHERWISE SPECIFIED DUNNAGE LUMBER, STEEL STRAPPING, STRAP SEALS AND NAILS SHALL BE AS SPECIFIED IN THE BASIC TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY).
11. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).

FTL AND LTL 40, 42, 44 & 45 FT TRAILERS (FLATBED)

WARNING

TRAILERS LONGER THAN 40 FT AND TRACTOR-TRAILER LENGTHS OVER 55 FT ARE NOT LEGAL IN ALL STATES. WHEN VEHICLES EXCEED THESE LIMITS, ROUTING SHOULD BE CHECKED TO DETERMINE THEIR LEGALITY IN EACH STATE OF THE ROUTING.


1. A FTL FOR TRAILERS 42 FT AND LONGER CONSISTS OF 24 TORPEDOES. WHEN SHIPPING THIS AMOUNT FOLLOW THE INSTRUCTIONS ON PAGE 4. IF SPACE AT FRONT OF TRAILER EXCEEDS 30 INCHES, FORWARD BLOCKING AS SHOWN ON PAGE 5 MAY BE SUBSTITUTED FOR THE FORWARD PREPOSITIONED BLOCKING. LOAD TRAILER STARTING AT REAR POSITIONING CROSS BLOCKING (PIECE NO. 3) AFTER STACK IS IN PLACE.
2. A LTL FOR TRAILERS 42 FT AND LONGER CONSISTS OF 19 TO 23 TORPEDOES. LOAD USING THE LOAD PATTERNS SHOWN IN TABLE I. BLOCK AND TIEDOWN AS SHOWN ON PAGE 4. USE FILLER ASSEMBLY (DETAIL E, PAGE 7) IN REAR STACK WHEN SHIPPING 23 TORPEDOES. INSTALL ASSEMBLY AS SHOWN ON PAGE 5. (NOTE: LESSER QUANTITIES OF TORPEDOES SHOULD BE SHIPPED ON 40 FT TRAILERS).
3. A FTL FOR A 40 FT TRAILER, CONSISTS OF 18 TORPEDOES. WHEN LOADING THIS AMOUNT USE THE LOAD PATTERN TABLE I AND FOLLOW THE PRINCIPLES SHOWN ON PAGE 5. WHEN LOADING LESS THAN 18 TORPEDOES, USE THE LOAD PATTERN TABLE I AND FOLLOW THE PRINCIPLES SHOWN ON PAGES 5 AND 6.

NOTE

THE USE OF SHORTER TRAILERS ARE AUTHORIZED PROVIDED THE BLOCKING AND TIEDOWNS ARE IN ACCORDANCE WITH THE PRINCIPLES OF THIS DOCUMENT. SHIPMENT MAY BE MADE USING "DOUBLES" PROVIDED "DOUBLES" ARE AUTHORIZED IN THE STATE(S) THROUGH WHICH THE SHIPMENT IS ROUTED.


Source: https://assist.dla.mil -- Downloaded: 20261O-23T23:46Z
Check the source to verify that this is the current version before use.

TABLE I
40 FT & LONGER TRAILERS
LOAD PATTERN

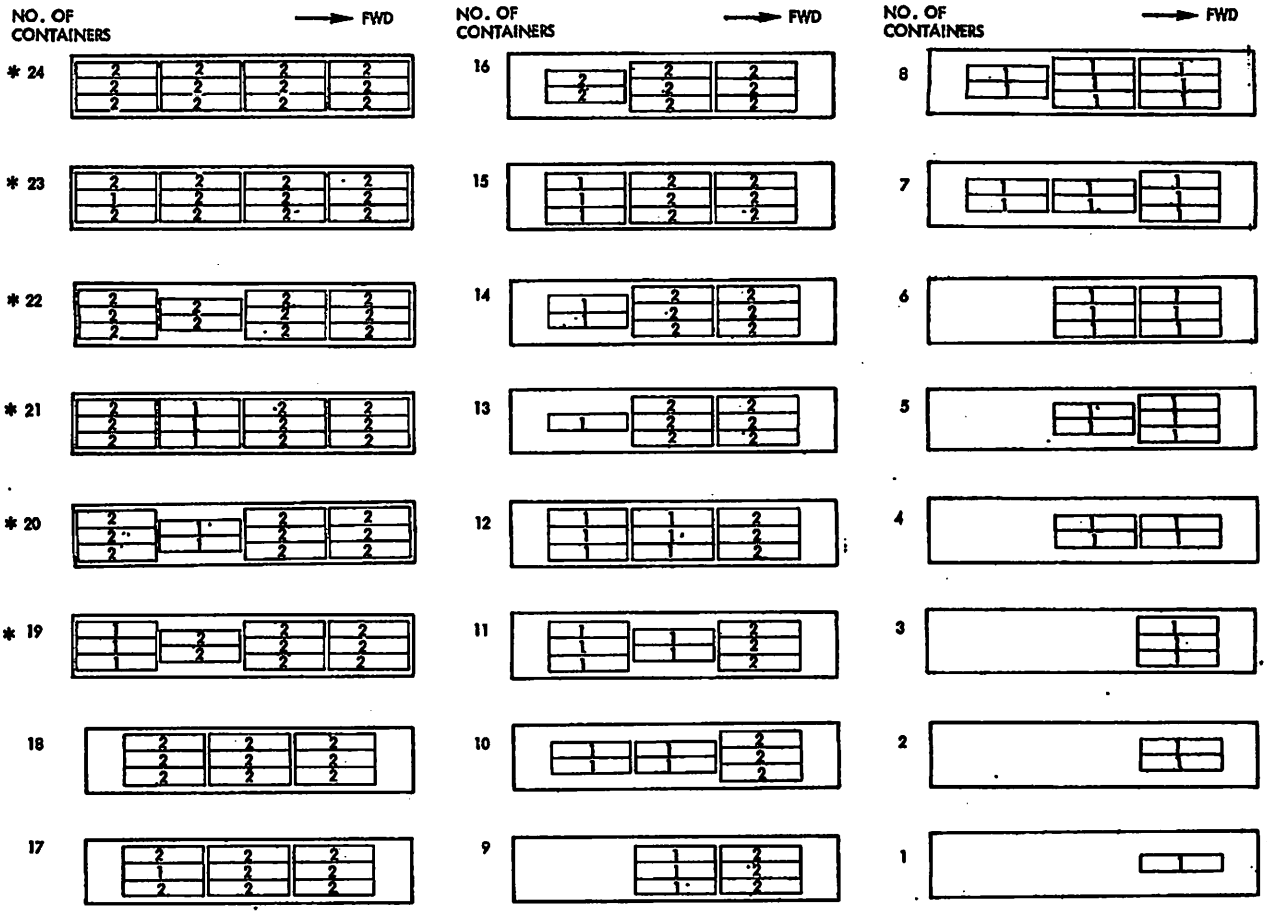

* REQUIRES A 42 FT OR LONGER TRAILER.

NOTE: THE NUMBER IN THE BLOCKS INDICATES THE NUMBER OF CONTAINERS IN A ROW OF A STACK.

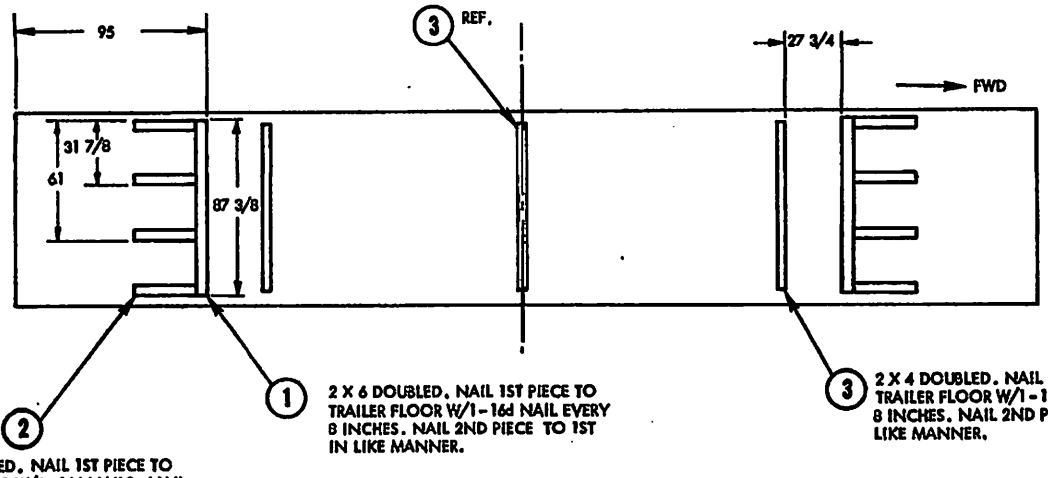

2 X 6 DOUBLED. NAIL 1ST PIECE TO TRAILER FLOOR W/6-16d NAILS. NAIL 2ND PIECE TO 1ST IN LIKE MANNER.


2 X 6 DOUBLED. NAIL 1ST PIECE TO TRAILER FLOOR W/1-16d NAIL EVERY 8 INCHES. NAIL 2ND PIECE TO 1ST IN LIKE MANNER.

2 X 4 DOUBLED. NAIL 1ST PIECE TO TRAILER FLOOR W/1-16d NAIL EVERY 8 INCHES. NAIL 2ND PIECE TO 1ST IN LIKE MANNER.

DETAIL A

PREPOSITION BLOCKING FOR 42 FT OR LONGER TRAILER


Source: https://assist.dla.mil -- Downloaded: 20261O-23T23:46Z
Check the source to verify that this is the current version before use.

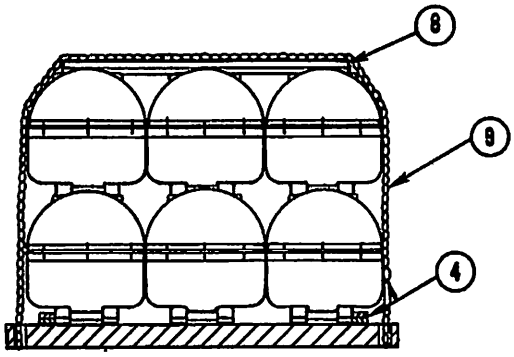

SECTION B-B

NOTE

THIS TRUCKLOAD ILLUSTRATES THE USE OF CHAINS AS TIEDOWNS. 2 X .050 STRAPS ARE AUTHORIZED AS AN ALTERNATE. SEE GENERAL NOTE 7.

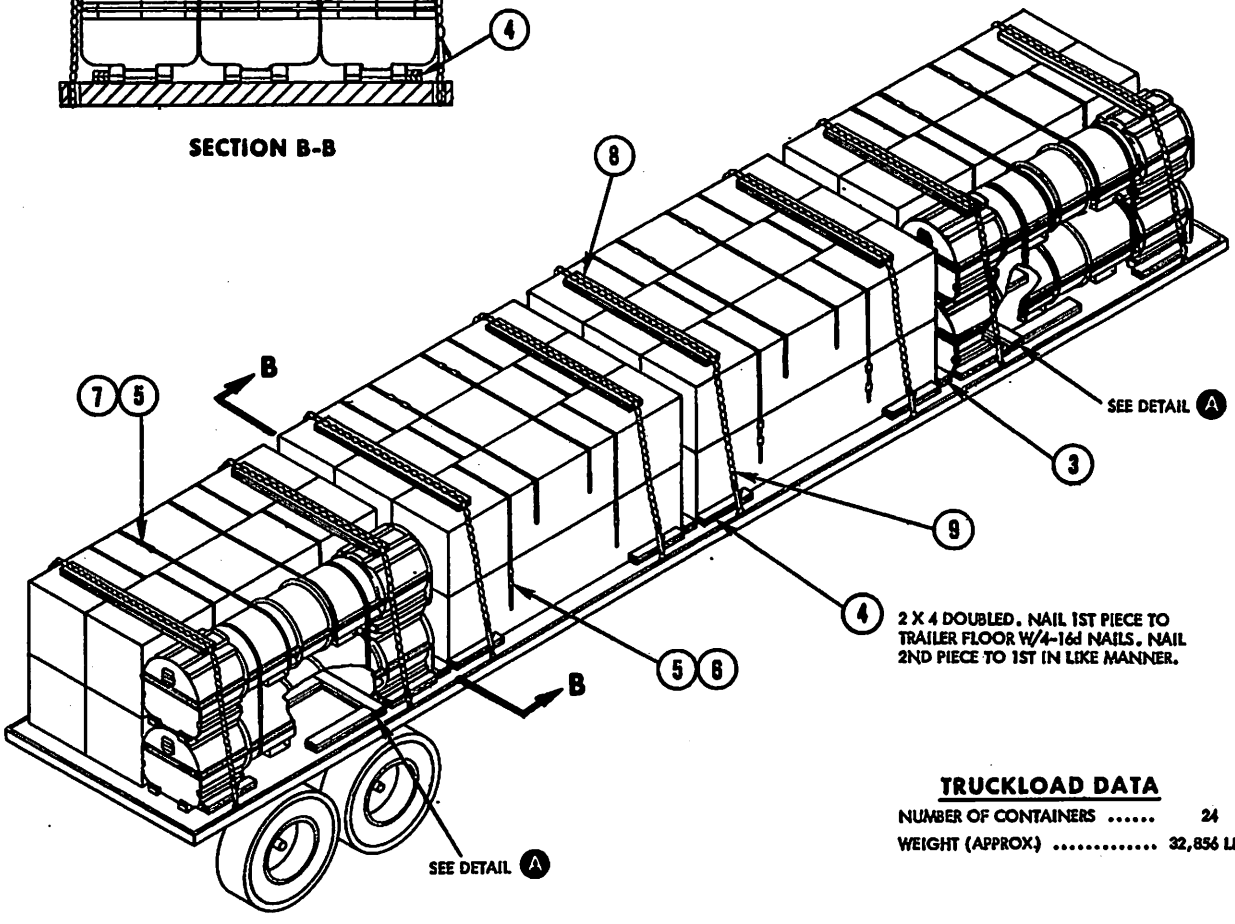

2 X 4 DOUBLED. NAIL 1ST PIECE TO TRAILER FLOOR W/4-16d NAILS. NAIL 2ND PIECE TO 1ST IN LIKE MANNER.

TRUCKLOAD DATA

NUMBER OF CONTAINERS 24


WEIGHT (APPROX.) ..... 32,856 LBS.

PIECE NO.	DESCRIPTION	SIZE	NO. PCS. REQ'D	NAIL TO	NAILS NUMBER	NAILS SIZE
9	TIEDOWN CHAIN	3/8 OR 5/16	8	-	-	-
8	PROTECTOR BOARD	2 X 6 X 72	16	DBL LAMINATE	6	10d
7	CROSS STRAP	1 1/4 X .035 X 21 FT	8	-	-	-
6	UNITIZING STRAP	1 1/4 X .035 X 22 FT	24	-	-	-
5	SEAL	FOR 1 1/4 STRAP	64	-	-	-
4	SLEEPER	2 X 4 X 24	32	SEE FIELD NOTE		
3	INTERMEDIATE CROSSMEMBER	2 X 4 X 84	6	SEE DETAIL A		
2	BACKUP CLEAT	2 X 6 X 30	16	SEE DETAIL A		
1	CROSSMEMBER	2 X 6 X 87 3/8	4	SEE DETAIL A		

LIST OF MATERIALS & NAILING DATA

FTL 42 FT TRAILER (FLATBED)


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.

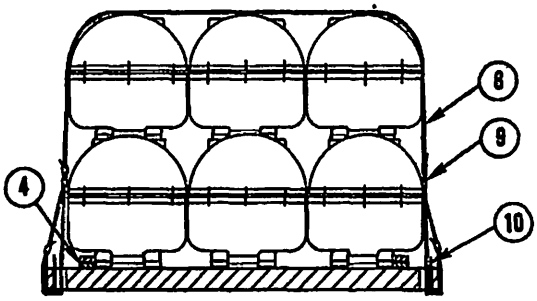

SECTION C-C

NOTE

THIS TRUCKLOAD ILLUSTRATES THE USE OF 2 X .050 STRAPS AS TIEDOWNS. CHAINS ARE AN AUTHORIZED ALTERNATE. SEE GENERAL NOTE 7.

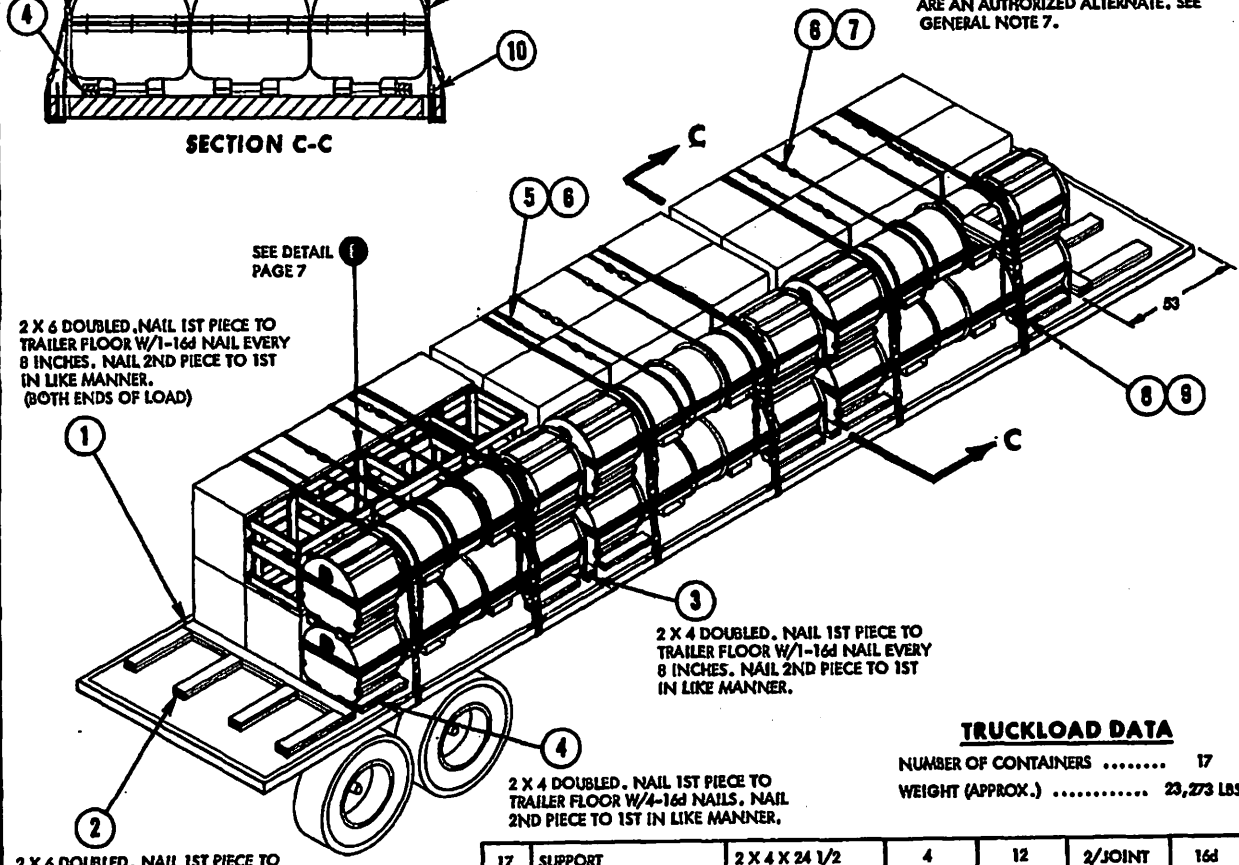

TRUCKLOAD DATA

NUMBER OF CONTAINERS 17


WEIGHT (APPROX.) ..... 23,273 LBS.

PIECE NO.	DESCRIPTION	SIZE	NO. OF PCS. REQD	NAIL TO	NUMBER NAILS	SIZE NAILS
17	SUPPORT	2 X 4 X 24 1/2	4	12	2/JOINT	16d
16	BUFFER PIECE	1 X 6 X 72	2	15	1/FT	10d
15	LONGITUDINAL	2 X 6 X 118	2	13	2/JOINT	10d
14	LONGITUDINAL	2 X 4 X 118	4	SEE 11 & 12	-	-
13	CROSS BRACE	2 X 6 X 24 5/8	5	11	3/JOINT	16d
12	HORIZONTAL	2 X 4 X 24 5/8	10	11	2/JOINT	16d
11	VERTICAL	2 X 4 X 28 1/4	10	14 & 15	2/JOINT	10d
10	STAKE POCKET PAD (STRAPPING)	2 X .050 X 18	12	-	-	-
9	SEAL	FOR 2" STRAP	48	-	-	-
8	TIEDOWN STRAP	2 X .050 X 24 FT	6	-	-	-
7	CROSS STRAP	1 1/4 X .035 X 21 FT	6	-	-	-
6	SEAL	FOR 1 1/4 STRAP	48	-	-	-
5	UNITIZING STRAP	1 1/4 X .035 X 22 FT	18	-	-	-
4	SLEEPER	2 X 4 X 24	24	SEE FIELD NOTE		
3	INTERMEDIATE CROSSMEMBER	2 X 4 X 84	4	SEE FIELD NOTE		
2	BACKUP CLEAT	2 X 6 X 30	16	SEE FIELD NOTE		
1	CROSSMEMBER	2 X 6 X 84	4	SEE FIELD NOTE		

LIST OF MATERIALS & NAILING DATA

LTL OF 17 CONTAINERS ON 40 FT TRAILER (FLATBED)


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.

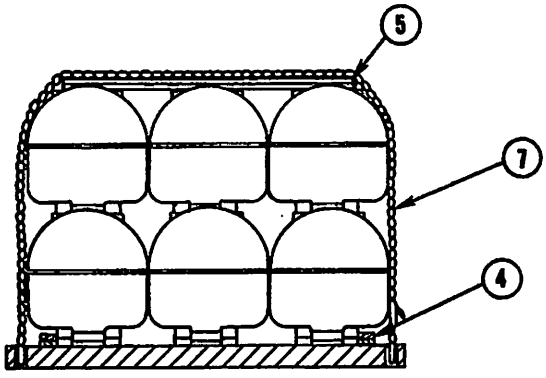

SECTION D-D

NOTE

THIS TRUCKLOAD ILLUSTRATES THE USE OF CHAINS AS TIEDOWNS. 2 X .050 STRAPS ARE AN AUTHORIZED ALTERNATE, SEE GENERAL NOTE 7.

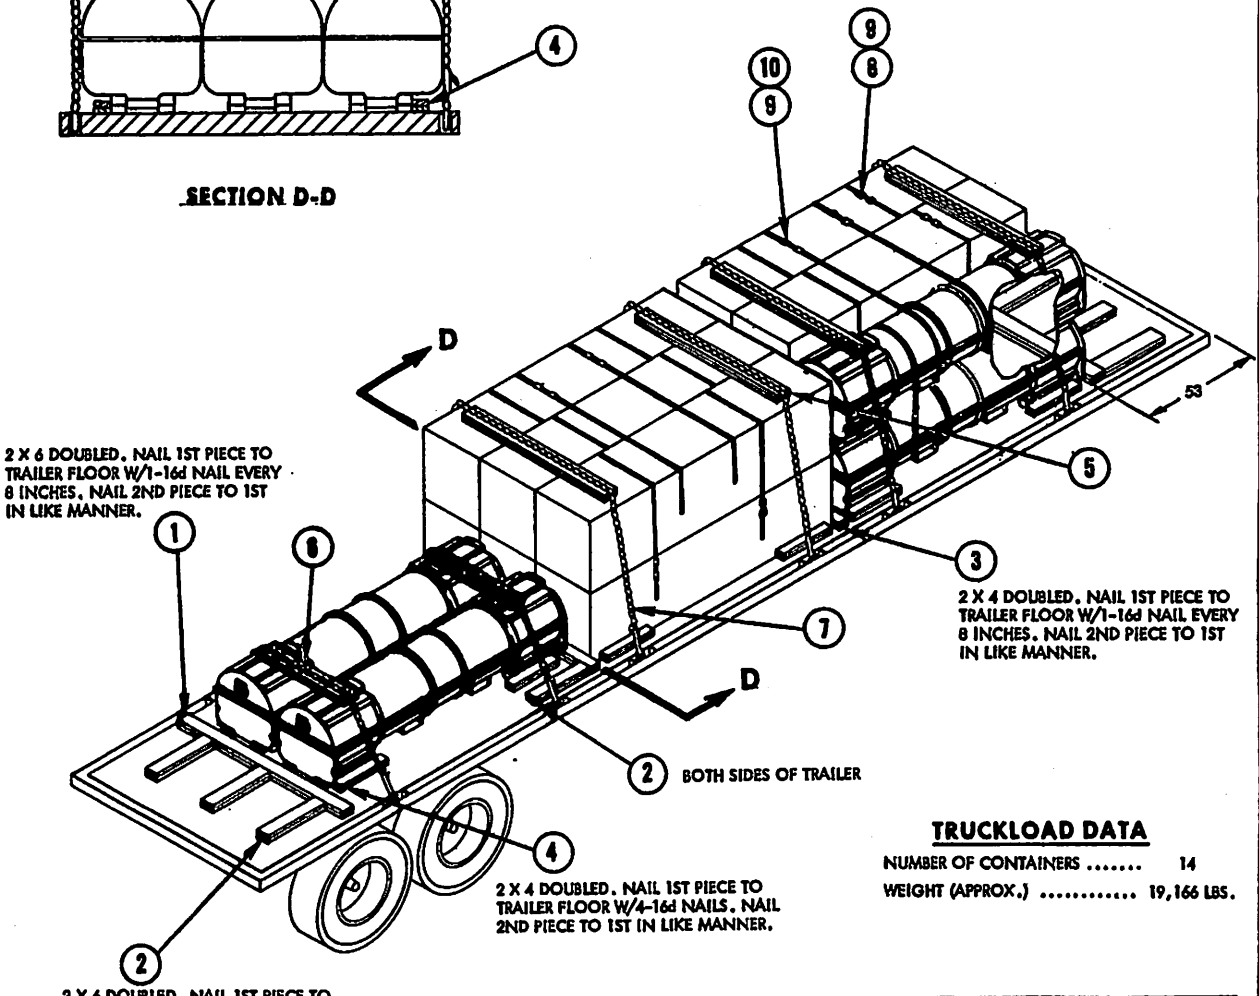

TRUCKLOAD DATA

NUMBER OF CONTAINERS 14

WEIGHT (APPROX.) ..... 19,166 LBS.


PIECE NO.	DESCRIPTION	SIZE	NO. OF PCS. REQ'D	NAIL TO	NAILS NUMBER	NAILS SIZE
10	CROSS STRAP	1 1/4 X .035 X 21FT	4	-	-	-
9	SEAL	FOR 1 1/4 STRAP	32	-	-	-
8	UNITIZING STRAP	1 1/4X .035 X 22FT	12	-	-	-
7	TIEDOWN CHAIN	3/8 OR 5/16	6	-	-	-
6	PROTECTOR BOARD	2 X 6 X 44	4	DOUBLE LAMINATE	6	10d
5	PROTECTOR BOARD	2 X 6 X 72	8	DOUBLE LAMINATE	6	10d
4	SLEEPER	2 X 4 X 24	24	SEE FIELD NOTE		
3	INTERMEDIATE CROSSMEMBER	2 X 4 X 84	4	SEE FIELD NOTE		
2	BACKUP CLEAT	2 X 6 X 30	18	SEE FIELD NOTE		
1	CROSSMEMBER	2 X 6 X 84	4	SEE FIELD NOTE		

LIST OF MATERIALS & NAILING DATA

LTL OF 14 CONTAINERS ON 40 FT TRAILER (FLATBED)

Source: https://assist.dla.mil -- Downloaded: 20260-23T23:46Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE

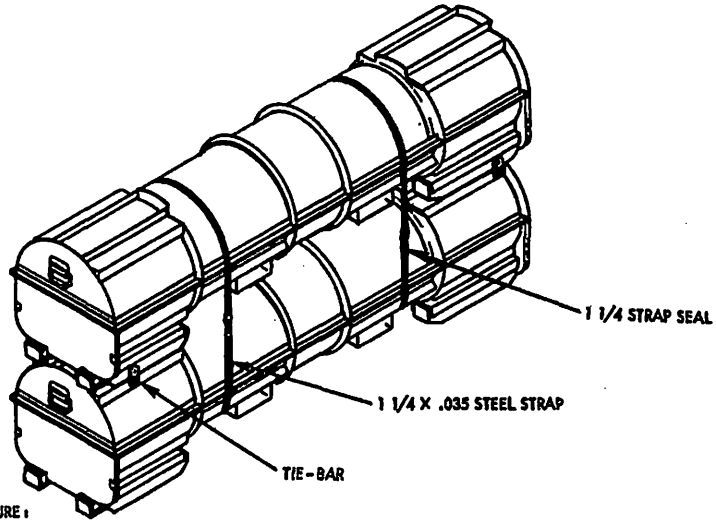


CONTAINER UNITIZING PROCEDURE:

1. USING A FORK LIFT TRUCK STACK THE TOP CONTAINER ON THE BOTTOM CONTAINER. BE SURE TO ALIGN STACKING FEATURES.
2. SECURE CONTAINERS TOGETHER USING TIE-BARS (TWO PLACES).
3. STRAP CONTAINERS TOGETHER USING 1 1/4 X .035 STEEL STRAP. THE STRAP PASSES OVER THE TOP AND UNDER THE BOTTOM OF THE BOTTOM CONTAINER AS SHOWN. TENSION STRAPS AND SEAL WITH TWO DOUBLE CRIMPED SEALS OR ONE DOUBLE NOTCHED SEAL.

WARNING

WHEN LOADING/UNLOADING TRAILERS WITH UNITIZED CONTAINERS, EXTRA CAUTION SHOULD BE TAKEN TO PREVENT TOPPLING. SPECIAL ATTENTION SHOULD BE GIVEN TO APPROPRIATE BACKUP OF OUTBOARD CONTAINERS. CONTAINERS SHALL BE DEUNITIZED AFTER UNLOADING VEHICLE.

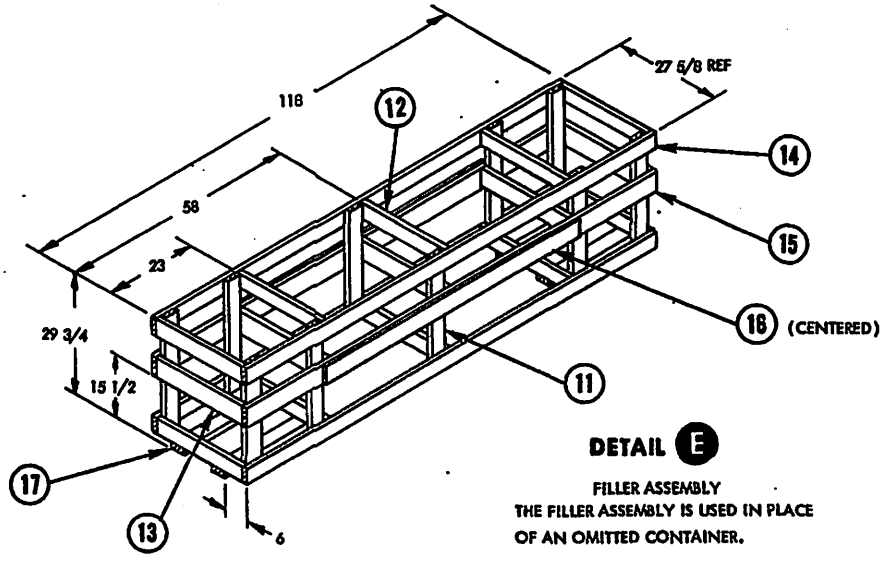

DETAIL E

FILLER ASSEMBLY
THE FILLER ASSEMBLY IS USED IN PLACE OF AN OMITTED CONTAINER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:46Z
Check the source to verify that this is the current version before use.