MILITARY STANDARD

MIL-STD-1320-206 A (NAVY)

25 MAY 1982


SUPERSEDING
MIL-STD-1320-206
2 AUGUST 1981

TRUCKLOADING

MINE UNDERWATER, MX 55 AND MODS CONFIGURATION B & C IN CRATE MX 55 MOD 1 WITH ADAPTERS MK 112 MOD 0 FLEET ISSUE UNIT LOAD

UNIT LOAD DATA

DIMENSIONS	84 L X 26 3/4 W X 32 1/4 H
CUBE	45.0 CU FT
GROSS WEIGHT (APPROX)	TABLE IV
DOT HAZARD CLASSIFICATION	EXPLOSIVES A

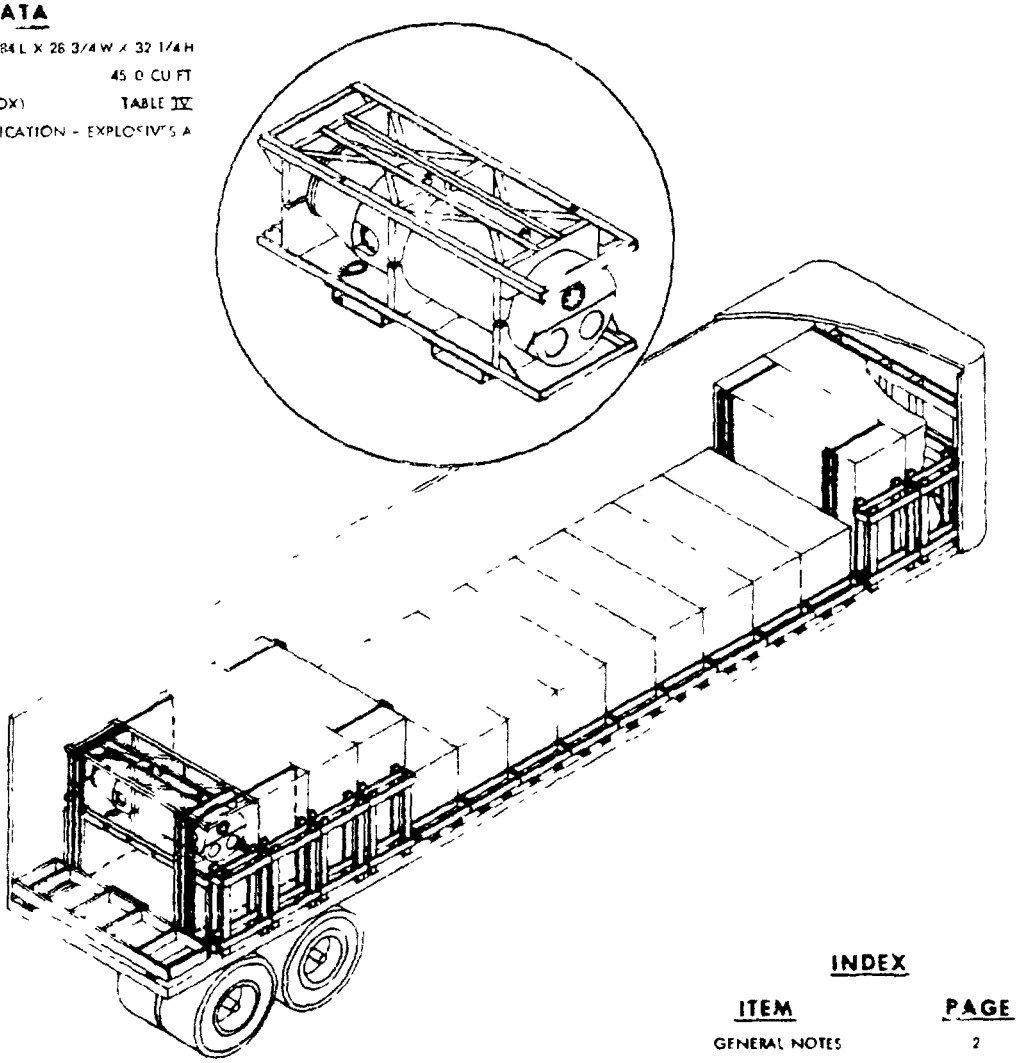

INDEX

ITEM	PAGE
GENERAL NOTES	2
TABLES I II & III	3
TABLES IV & V	4
DETAILS	5
TYPICAL LOADS	6 7 & 8
UNITIZING	9

NOTES
1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS REFER TO INDEX TO STANDARDS MIL-HDBK-236 (NAVY)

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENTS ONLY

SIGNATURE SEA SYSTEMS COMMAND (PDS) 5/21/82 DATE

BY DIRECTION 5/24/82 DATE

ORIGINATOR [signature] 12 APR 1982 DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1 THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING FLEET ISSUE UNIT LOADS OF THE UNDERWATER MINE MK 55 AND MODS CONFIGURATIONS B, C AND D, IN CRATE UNDERWATER MINE MK 55 MOD 1 THE MINE CRATE SHALL BE EQUIPPED WITH CRATE ADAPTERS MK 112 MOD 0 IN ACCORDANCE WITH WR-54/209

2 THE PROCEDURES AND PRACTICES HEREIN ARE INTENDED FOR 40 42 44 AND 45 FT VAN TYPE TRAILERS WITH NAILABLE FLOORS TRAILERS SHALL HAVE THEIR AXLES LOCATED IN THE "WESTERN" POSITION (AT THE EXTREME REAR OF THE TRAILER) DO NOT USE TRAILERS WITH ROLL UP DOORS TRACTOR SHOULD HAVE SLIDING 5TH WHEEL

3 THE LENGTH OF THE STRUTS (PIECE 8 OF DETAIL D, PIECE 11 OF DETAIL E AND PIECE 5 OF DETAIL J) SHALL BE SUFFICIENT LENGTH TO CAUSE THE FILLER ASSEMBLY TO BEAR AGAINST THE MINE CRATE AND THE TRAILER WALL ONE HALF INCH SLACK IS PERMITTED

4 THE LENGTHS OF FILLER ASSEMBLIES, DETAILS E AND J MAY BE INCREASED TO 57 1/2 TO ACCOMMODATE TWO CRATES PROVIDED AN ADDITIONAL STRUT IS ADDED AT THE MID-POINT

5 TRAILERS SHORTER THAN 40 FT MAY BE USED LOAD BLOCK AND BRACE ACCORDING TO THE PRINCIPLES OF THIS STANDARD VEHICLE CAPACITY GROSS VEHICLE WEIGHT AND AXLE WEIGHT REQUIREMENTS SHALL BE OBSERVED

6 THE LENGTH OF THE STRUT, PIECE 5 OF DETAIL C (PAGE 5) SHALL BE SUFFICIENT LENGTH TO CAUSE THE BLOCKING ASSEMBLY TO FILL THE VOID BETWEEN THE LADING AND THE TRAILER DOORS WHEN THE DOORS ARE CLOSED

7 WHEN THE SPACE BETWEEN THE LADING AND THE REAR OF THE TRAILER IS GREATER THAN 36 INCHES, BLOCK THE REAR OF THE LOAD AS SHOWN ON PAGE 8

8 THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS

9 AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS TO INSIDE OF TRAILER IN AN ACCESSIBLE AREA, CLOSE AND SEAL TRAILER DOORS AND ATTACH EXPLOSIVES A PLACARD TO BOTH SIDES, FRONT AND BACK OF THE TRAILER

10 UNLESS OTHERWISE SPECIFIED ALL MATERIALS SHALL BE IN ACCORDANCE WITH THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320

11 FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320

FTL & LTL 40, 42, 44 & 45 FT TRAILERS (VAN)

WARNING

THIS STANDARD PROVIDES FOR INCREASED LOADINGS
WHICH PRODUCE HEAVIER GROSS TANDEM AXLE WEIGHTS
THESE INCREASED WEIGHTS ARE NOT AUTHORIZED IN ALL
50 STATES

1 TABLES I II AND III PROVIDE THE CORRECT LOAD PATTERN NUMBER TO BE USED WHEN SHIPPING THE UNDERWATER MINE MK 55 AND MODS TO USE THESE TABLES -

A DETERMINE THE DODIC/NALC NO OF THE MINE

B SELECT THE TABLE USING THIS NUMBER

2 TABLE IV PROVIDES THE PRESCRIBED LOAD PATTERNS AFTER DETERMINING THE CORRECT LOAD PATTERN NUMBER (SEE NOTE 1 ABOVE), FIND THE CORRECT LOAD PATTERN TO USE OPPOSITE THE LOAD PATTERN NUMBER

3 BLOCK AND BRACE ALL LOAD PATTERNS SHOWN IN TABLE IV USING THE PRINCIPLES SHOWN ON PAGES 6 AND 7

4 WHEN TRUCKLOAD HAS A PARTIAL SECOND LAYER, THE CRATED MINE(S) IN THE SECOND LAYER SHALL BE STRAPPED TO THE BOTTOM CRATED MINE(S) WHERE THE LOAD PATTERN CHANGES FROM TWO LAYERS HIGH TO ONE LAYER HIGH TWO HIGH CRATES AT THE REAR OF THE LOAD SHALL ALSO BE STRAPPED TOGETHER SEE UNITIZING PROCEDURE PAGE 9 FOR INSTRUCTIONS

5 WHEN THE CRATED MINES ARE TWO HIGH AT THE REAR OF THE LOAD, THE LAST TWO STACKS SHALL BE STRAPPED TOGETHER WITH TWO 1 1/4 X .035 STEEL STRAPS THESE STRAPS ENCIRCLE THE TWO STACKS PASSING OVER THE TOP TWO CRATED MINES AND UNDER THE BOTTOM TWO TENSION STRAPS AND SEAL WITH TWO DOUBLE CRIMPED SEALS SEE PAGE 6 THESE MINES SHOULD BE STRAPPED TOGETHER IN PLACE ATTACH TO EACH STRAP IN A CONSPICUOUS PLACE A SUITABLE TAG CARRYING THE FOLLOWING INSTRUCTIONS 'CUT AND REMOVE THIS STRAP BEFORE UNLOADING VEHICLE

6 WHEN SHIPPING LESS THAN A FULL SINGLE LAYER FOLLOW THE PROCEDURES SHOWN ON PAGE 8

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.

TABLE I

U877 U912, U913

NO OF UNIT LOADS	LOAD PATTERN NUMBER					
	MAX AXLE WT 34 000 LBS			MAX AXLE WT 32,000 LBS		
	TRAILER LENGTH			TRAILER LENGTH		
	40	42	44/45	40	42	44/45
20	16	9	3	NA	NA	NA
19	17	10	4	NA	NA	NA
18	18	11	5	18	11	5
17	19	12	6	19	12	6
16	20	13	*	20	13	*
15	21	*	*	21	*	*
14	*	*	*	*	*	*

TABLE II

U875 U876 U887 U888 U889 U899, U900
U901 U911 U924, U925, U930, U931

NO OF UNIT LOADS	LOAD PATTERN NUMBER					
	MAX AXLE WT 34,000 LBS			MAX AXLE WT 32,000 LBS		
	TRAILER LENGTH			TRAILER LENGTH		
	40	42	44/45	40	42	44/45
19	17	10	4	NA	NA	NA
18	18	11	5	NA	NA	NA
17	19	12	6	19	12	6
16	20	13	*	20	13	*
15	21	*	*	21	*	*
14	*	*	*	*	*	*

TABLE II A

U923 U929 U935 U936 U93[illegible]

NO OF UNIT	LOAD PATTERN NUMBER					
	MAX AXLE WT 34 000 LBS			MAX AXLE WT 32,000 LBS		
	TRAILER LENGTH			TRAILER LENGTH		
	40	42	44/45	40	42	44/45
18	18	11	5	NA	NA	NA
17	19	12	6	19	12	6
16	20	13	*	20	13	*
15	21	*	*	21	*	*
14	*	*	*	*	*	*


* WHEN LOADING THIS QUANTITY OF UNITS USE NEXT HIGH SINGLE ROW PATTERN BLOCKED AND PROCEED USING THE MULTIPLIERS LISTED ON PAGE 8

TABLE IV

DODIC NATO NO	MINE MK 55 MOD	CONFIG-URATION	GROSS WEIGHT (APPROX.) LBS.	
			CRATED MINE	UNIT LOAD
U875	1	B	2185	2335
U876	1	C	2163	2313
U877	1	D	2155	2305
U887	2	B	2263	2413
U888	2	C	2229	2379
U889	2	D	2221	2371
U899	3	B	2276	2426
U900	3	C	2239	2389
U901	3	D	2231	2381
U911	4	B	2168	2318
U91	4	C	2160	2310
U913	4	D	2135	2285
U923	5	B	2427	2577
U924	5	C	2236	2386
U925	5	D	223	2382
U929	6	B	2380	2530
U93L	6	C	2247	2397
U931	6	D	2239	2389
U935	7	B	2 25	2475
U936	7	C	2315	2465
U937	7	D	2285	2435


TABLE V

LOAD PATTERN

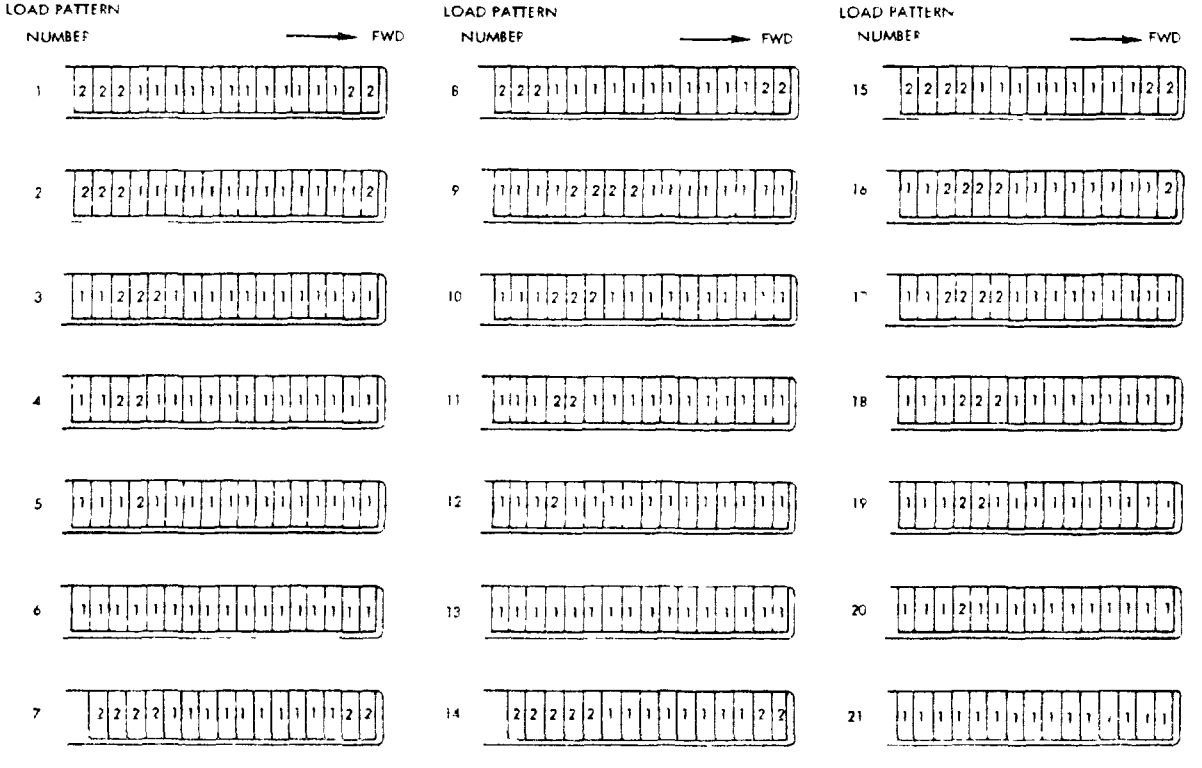


NOTE NUMBER IN BLOCKS INDICATE THE NUMBER OF CRATED MINES IN A LAYER


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.

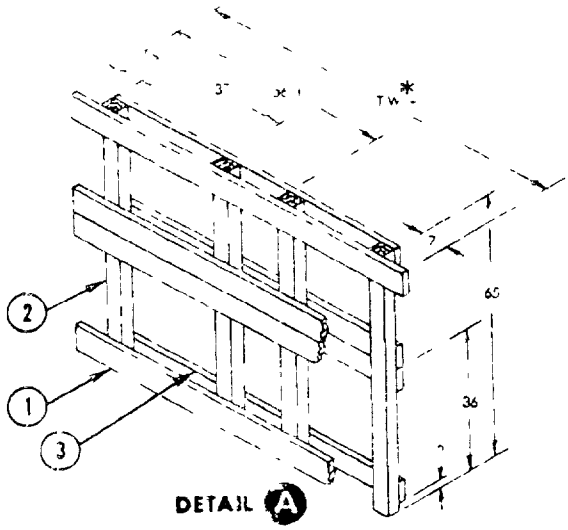


DETAIL A
FORWARD BULKHEAD
(1 REQUIRED)

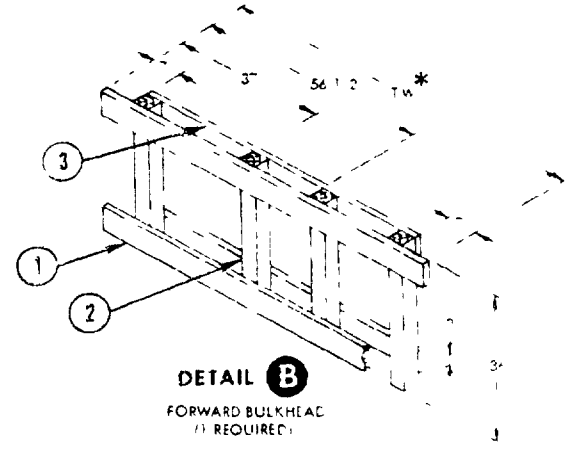


DETAIL B
FORWARD BULKHEAD
(1 REQUIRED)

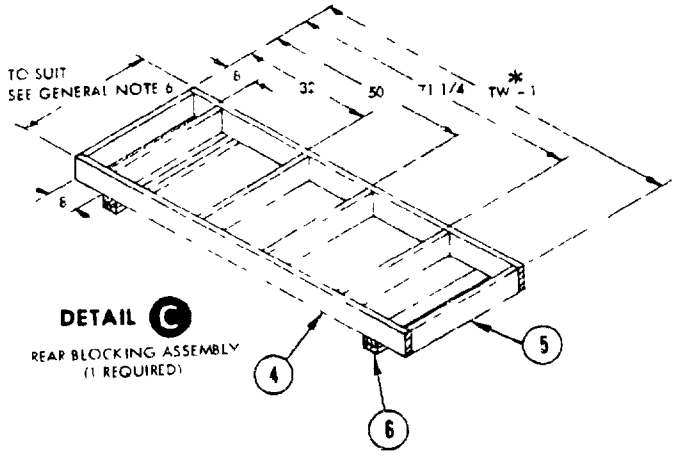

DETAIL C
REAR BLOCKING ASSEMBLY
(1 REQUIRED)

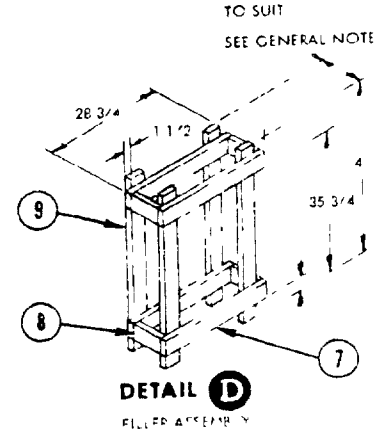


DETAIL D
FILLER ASSEMBLY

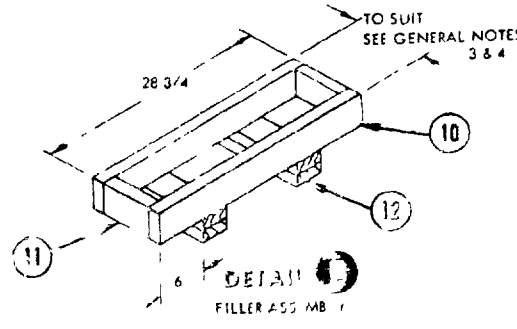


DETAIL E
FILLER ASSEMBLY

* TW = TAILER WIDTH

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.

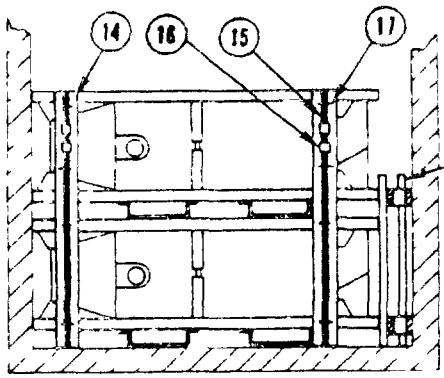

SECTION F-F

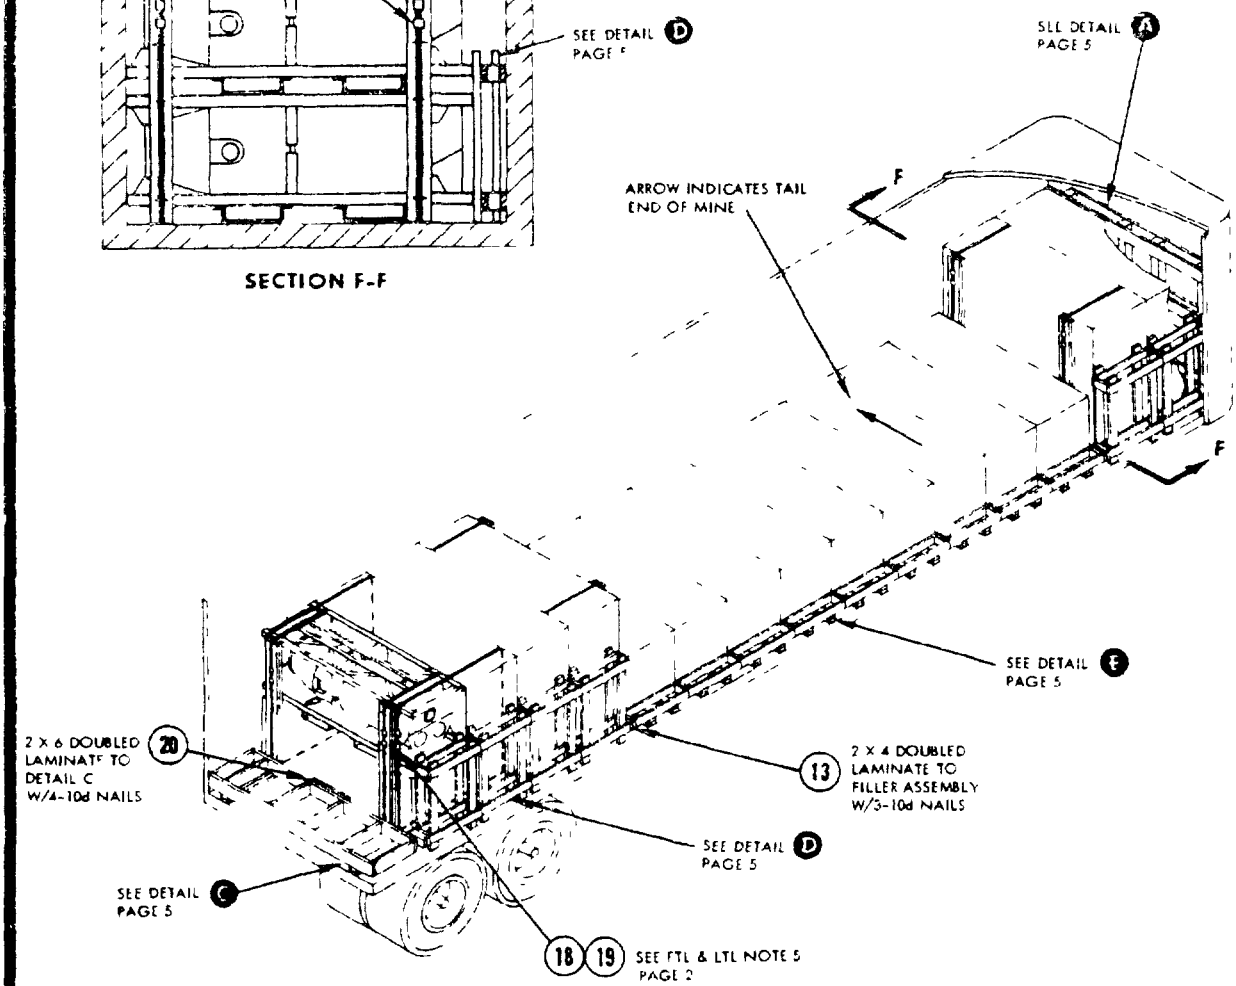

* TW - TRAILER WIDTH

PIECE NO	DESCRIPTION	SIZE	NO PCS REQ'D	NAIL TO	NUMBER	SIZE NAILS
20	FILLER	2 X 6 TO SUIT	^	SEE FIELD NOTE		
19	SEAL	FOR 1 1/4 STRAP	4	-	-	-
18	STRAP	1 1/4 X .035X 22 FT	2	-	-	-
17	STAPLE	FOR 1 1/4 STRAP	24	-	-	-
16	SEAL	FOR 1 1/4 STRAP	12	-	-	-
15	STRAP	1 1/4 X .035 X 17 FT	6	-	-	-
14	STIFFNER	2 X 6 X 61 1/4	12	LAMINATE	6	10d
13	FILLER	2 X 4 TO SUIT	6	SEE FIELD NOTE		
12	SUPPORT	2 X 4 TO SUIT	36	10 12	2/JOINT 3	10d 10d
11	STRUT	2 X 4 TO SUIT	18	SEE 10	-	-


LIST OF MATERIALS & NAILING DATA

PIECE NO	DESCRIPTION	SIZE	NO PCS REQ'D	NAIL TO	NUMBER	SIZE NAILS
10	HORIZONTAL	2 X 4 X 28 3/4	18	1	2/JOINT	16d
9	VERTICAL	2 X 4 X 43	24	7	3/JOINT	10d
8	STRUT	2 X 4 TO SUIT	24	SEE 7	-	-
7	HORIZONTAL	2 X 4 X 28 3/4	24	8	2/JOINT	16d
6	SUPPORT	2 X 4 TO SUIT	4	4 6	2/JOINT 3	10d 10d
5	STRUT	2 X 4 TO SUIT	6	SEE 4	-	-
4	CROSSMEMBER	2 X 6 X TW* -1	2	5	3/JOINT	16d
3	FWD CROSSMEMBER	2 X 6 TO SUIT	4	2	3/JOINT	12d
2	VERTICAL	4 X 4 X 65	4	SEE 1 & 3	-	-
1	AFT CROSSMEMBER	2 X 6 X TW* -1	4	2	3/JOINT	12d

LIST OF MATERIALS & NAILING DATA


40 FT VAN TRAILER WITH 21 MINES

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.

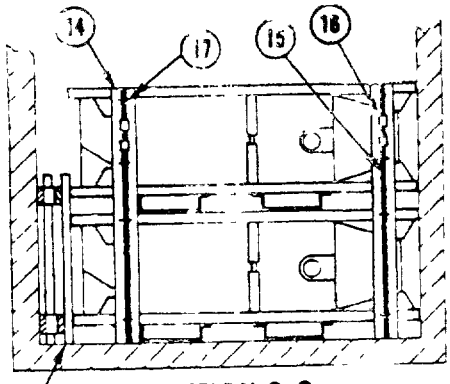


SECTION G-G

SEE DETAIL D PAGE 5

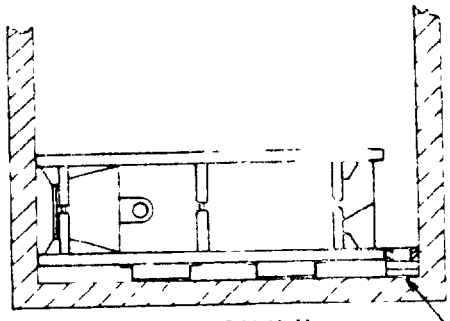

SECTION H-H

SEE DETAIL E PAGE 5

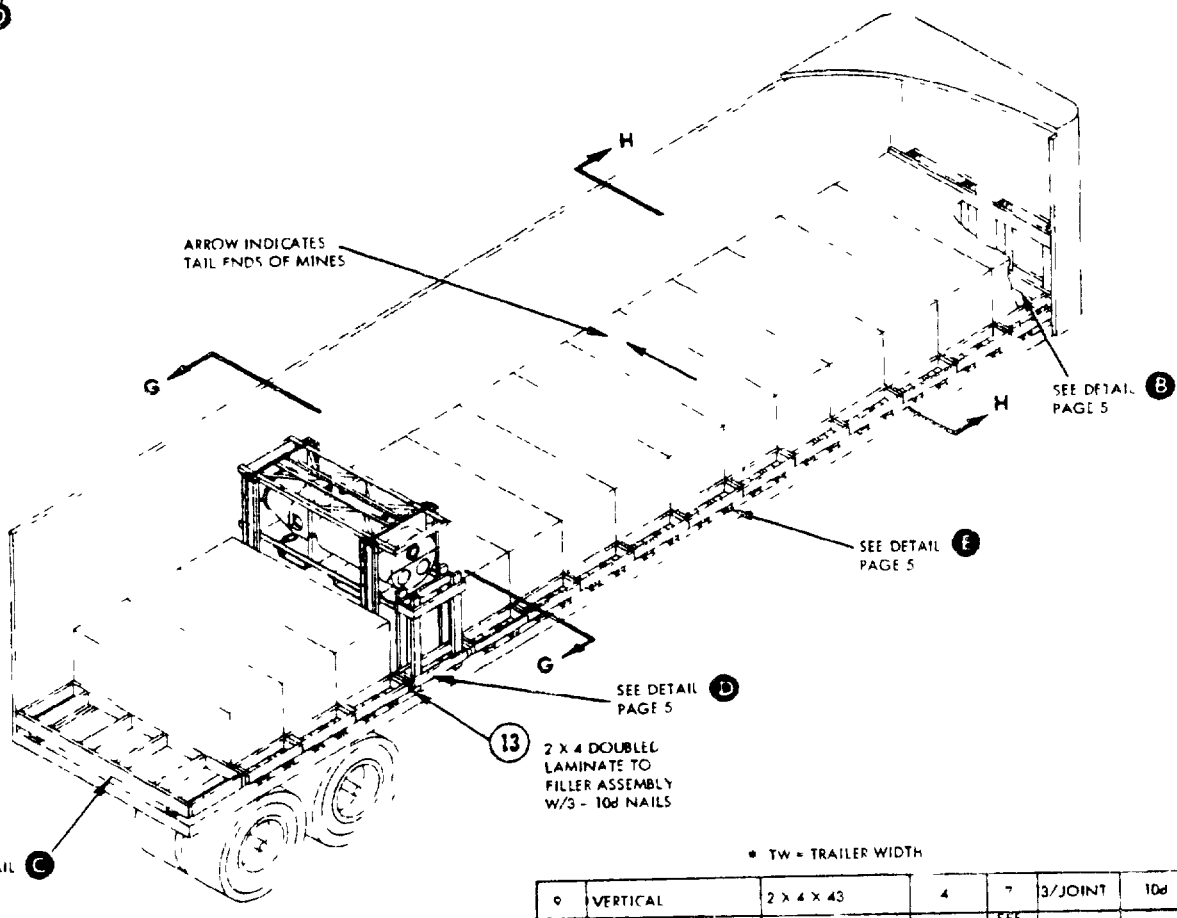

* TW = TRAILER WIDTH


PIECE NO	DESCRIPTION	SIZE	NO PCS REQ'D	NAIL TO	NUMBER	SIZE NAILS
17	STAPLE	FOR 1 1/4 STRAP	16	-	-	-
16	SEAL	FOR 1 1/4 STRAP	4	-	-	-
15	STRAP	1 1/4 X .035 X 17 FT	2	-	-	-
14	STIFFNER	2 X 6 X 61 1/4	8	LAMINATE	6	10d
13	FILLER	2 X 4 TO SUIT	4	SEE FIELD NOTE		
12	SUPPORT	2 X 4 TO SUIT	56	10	2/JOINT	10d
				12	3	10d
11	STUD	2 X 4 TO SUIT	28	SEE 10	-	-
10	HORIZONTAL	2 X 4 X 28 3/4	28	11	2/JOINT	16d
9	VERTICAL	2 X 4 X 43	4	7	3/JOINT	10d
8	STRUT	2 X 4 TO SUIT	4	SEE 7	-	-
7	HORIZONTAL	2 X 4 X 28 3/4	4	8	2/JOINT	16d
6	SUPPORT	2 X 4 TO SUIT	4	4	2/JOINT	10d
				2	3	10d
5	STRUT	2 X 6 TO SUIT	6	SEE 4	-	-
4	CROSSMEMBER	2 X 6 X TW* -1	2	5	3/JOINT	16d
3	FWD CROSSMEMBER	2 X 6 TO SUIT	2	2	3/JOINT	12d
2	VERTICAL	4 X 4 X 36	4	SEE 1 & 3	-	-
1	AFT CROSSMEMBER	2 X 6 X TW* -1	2	2	3/JOINT	12d

LIST OF MATERIALS & NAILING DATA


40 FT VAN TRAILER WITH 16 MINES

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.


2 X 6 TRIPLED. NAIL 1ST PIECE TO TRAILER FLOOR W/1-16d NAIL EVERY 8 INCHES. NAIL 2ND PIECE TO 1ST AND 3RD PIECE TO 2ND IN LIKE MANNER TOE NAIL TO PIECE 5 W/4-12d NAILS

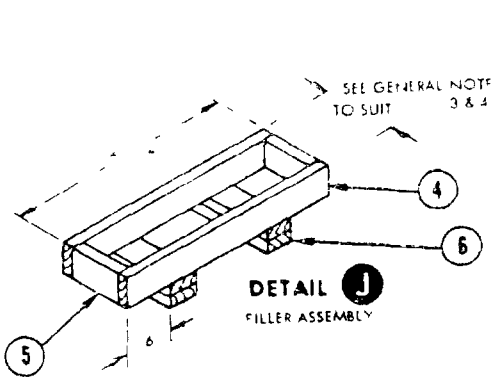


DETAIL J
FILLER ASSEMBLY

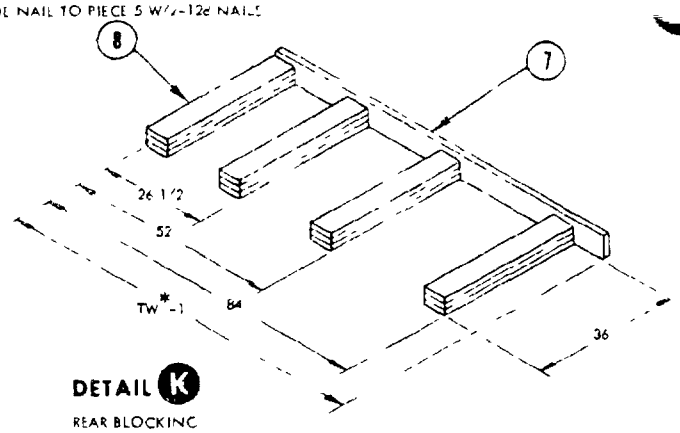

DETAIL K
REAR BLOCKING
(1 REQUIRED

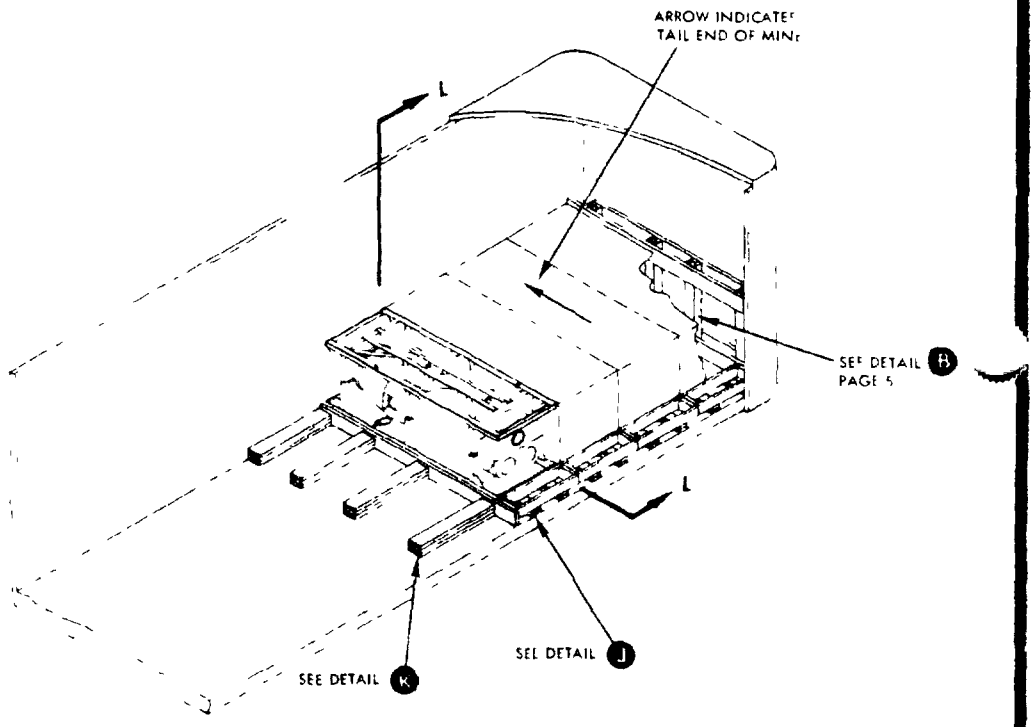

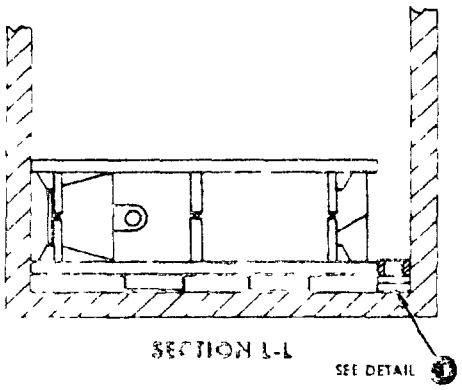

* TW = TRAILER WIDTH

PIECE NO	DESCRIPTION	SIZE	NO PCS REQ'D	NAIL TO	NUMBER	SIZE
8	BACKUP CLEAT	2 X 6 X 36	12	SEE FIELD NOTE		
7	CROSSMEMBER	2 X 6 X TW*-1	1	SEE 8	-	-
6	SUPPORT	2 X 4 TO SUIT	16	4 6	2/JOINT 3	10d 10d
5	STRUT	2 X 4 TO SUIT	8	SEE 4 & 6	-	-
4	HORIZONTAL	2 X 4 X 28 3/4	8	5	2/JOINT	16d
3	FWD CROSSMEMBER	2 X 4 TO SUIT	2	2	3	12d
2	VERTICAL	4 X 4 X 36	4	SEE 1 & 3	-	-
1	AFT CROSSMEMBER	2 X 6 X TW*-1	2	2	3	12d

LIST OF MATERIALS & NAILING DATA

TYPICAL PARTIAL SINGLE LAYER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.


UNITIZING PROCEDURE

WHEN REQUIRED BY THE MIL STD, THE TWO HIGH STACKED UNIT LOADS SHALL BE UNITIZED

NOTE

WHEN LOADING A TRAILER WITH A SINGLE STACK OF UNIT LOADS, THE STIFFENERS SHALL BE AT BOTH SIDES OF THE UNIT LOAD

2. THE 4 X 6 DOUBLED STIFFENERS SHALL EXTEND FROM THE TOP FRAME OF THE TOP CRATE TO THE BOTTOM ANGLE OF THE BOTTOM CRATE
3. THE 1 1/4 X .035 STEEL STRAPS POSITIONED AS SHOWN, ENCIRCLE THE STACKED MINE CRATES WITH THE STRAPS HOLDING THE STIFFENERS IN PLACE
4. TENSION STRAPS AND SEAL WITH TWO DOUBLE CRIMPED SEALS. SECURE EACH STRAP TO THE STIFFENER WITH FOUR 1 1/4 INCH STRAP STAPLES

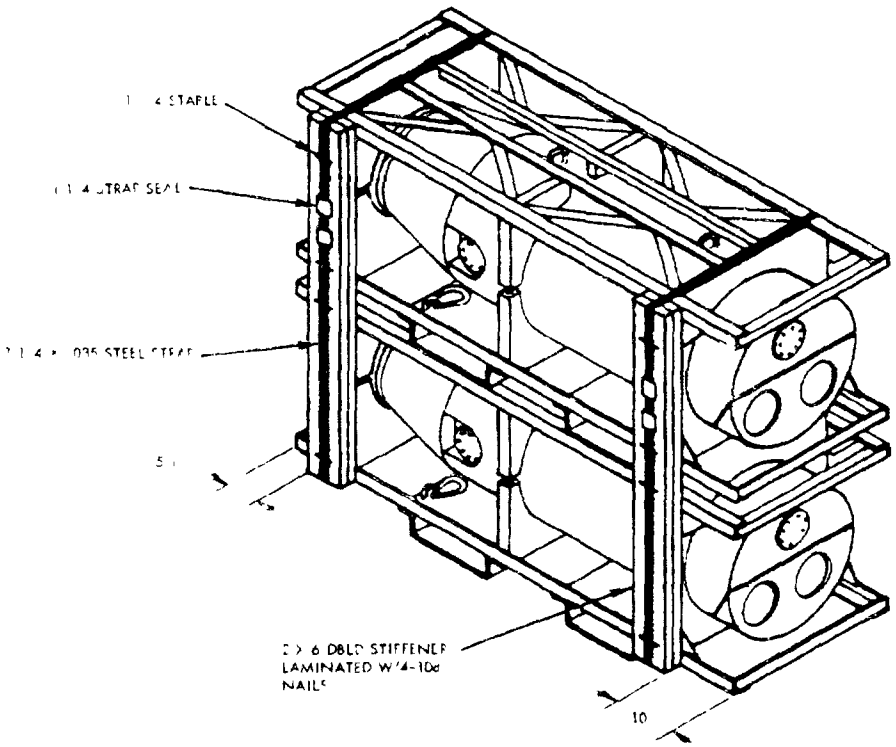

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay or will otherwise enhance use of the document DoD contractors government activities or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE

MIL-STD-1320-206A

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

S/N 0102-LF-001-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Naval Weapons Station Earle
Naval Weapons Handling Center (803)
Colts Neck, NJ 07722

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.