MILITARY STANDARD

MIL-STD-1320-213
(NAVY)

27 July 1984

TRUCKLOADING
STANDARD MISSILE (MR)
RIM-66A-1,2 ; RIM-66C ; RIM-66D-1,2 ;
RIM-66E-1,2 ; RIM-66H OR RIM-66J
IN CONTAINER MK 372 MOD 7


CONTAINER DATA

DIMENSIONS..... 202 1/2L X 28W X 29H

GROSS WEIGHT..... SEE TABLE I

TARE WEIGHT..... 690 LBS

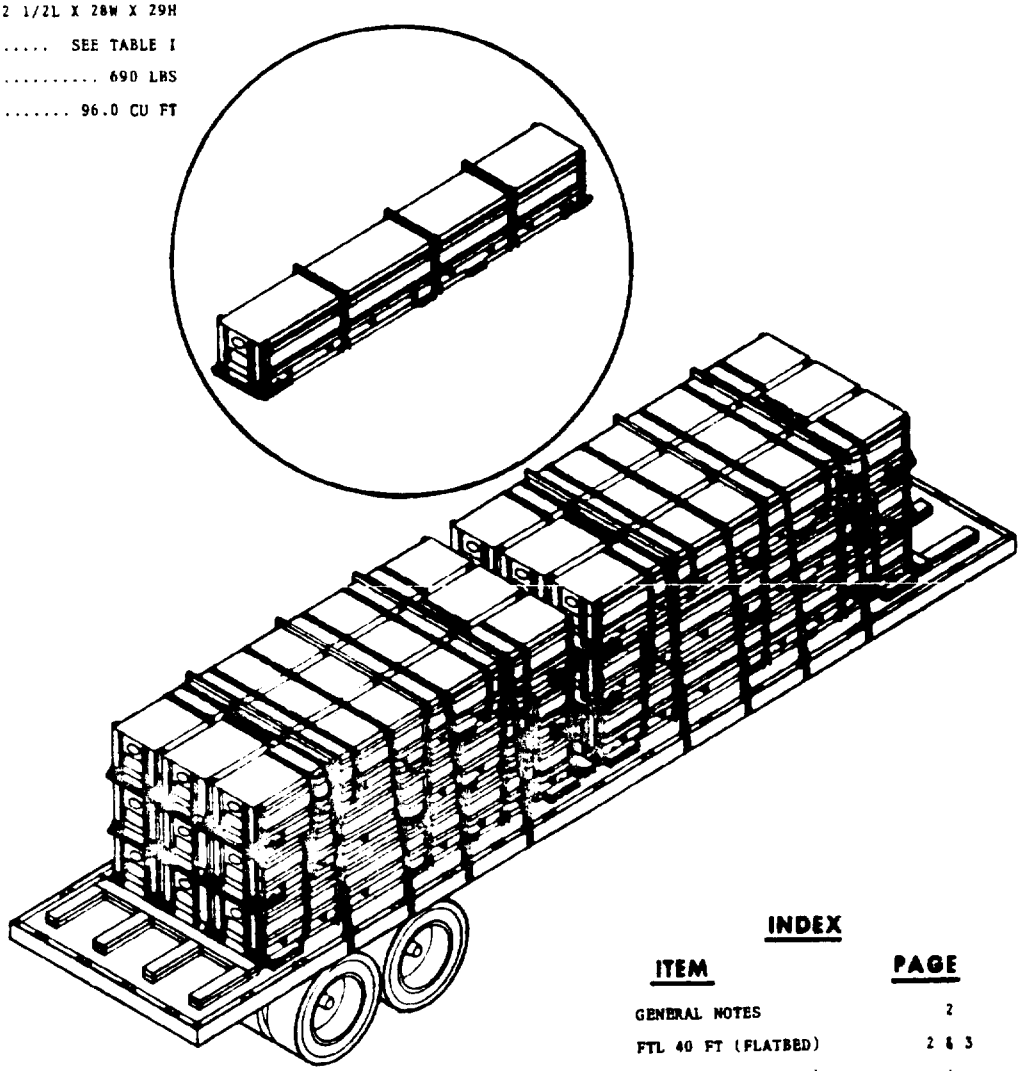CUBE..... 96.0 CU FT



INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL 40 FT (FLATBED)	2 & 3
LTL 40 FT (FLATBED)	4
UNITIZING & HANDLING	5

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236(NAVY).

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENT ONLY

M.S. Gray NWHC 7/24/84
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

SIGNATURE SEASYSCOM TECHNICAL DIRECTION DATE

ORIGINATOR 7/23/84
DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-05-20T23:49Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING THE STANDARD MISSILE RIM-66A-1,2, RIM-66C, RIM-66E-1,2, RIM-66D-1,2, RIM-66H AND RIM-66J IN THE CONTAINER MK 372 MOD 7.
2. THE PROCEDURES AND PRACTICES DESCRIBED HEREIN ARE INTENDED FOR 40 FT FLATBED TRAILERS WITH THE TRAILERS TANDEM AXLES LOCATED IN THE "WESTERN" POSITION (AT THE EXTREME REAR OF THE TRAILER). DO NOT USE TRAILERS WITH METAL FLOORS.
3. WHEN THE CONTAINERS ARE TWO HIGH, THEY SHALL BE UNITIZED AS SHOWN ON PG 6.

WARNING

TO AVOID TOPPLING SPECIAL CARE SHOULD BE TAKEN WHEN MOVING UNITIZED CONTAINERS. THE UNITIZING OF THE CONTAINERS IS AUTHORIZED AS PART OF THE TRUCKLOADING PROCEDURE ONLY. UNITIZING IS TO ENSURE CONTINUOUS ENGAGEMENT OF THE STACKING FEATURES AND MOVEMENT OF UNITIZED CONTAINERS SHOULD BE LIMITED TO THAT NECESSARY TO LOAD OR UNLOAD THE TRAILER.

4. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
5. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS TO AN ACCESSIBLE AREA AND ATTACH APPROPRIATE EXPLOSIVES PLACARD AS SPECIFIED IN TABLE 1 TO BOTH SIDES, FRONT AND BACK OF THE TRAILER.
6. UNLESS OTHERWISE SPECIFIED, ALL MATERIAL SHALL BE AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320.
7. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320.

FTL 40 FT TRAILER(FLATBED)

1. EACH STACK OF CONTAINERS SHALL BE SECURED TOGETHER WITH TWO 1 1/4 X .035 CROSS STRAPS. THE STRAPS PASS OVER THE COVERS OF THE CONTAINERS IN THE TOP LAYER AND RETURN PASSING UNDER THE BOTTOMS OF THESE CONTAINERS, BINDING THE TOP LAYER TOGETHER.
2. LOAD BINDERS AND CHAINS MAY BE USED AS AN ALTERNATE FOR THE 2 INCH STRAPPING, SUBSTITUTE ONE CHAIN AND LOAD BINDER FOR EACH 2 INCH STRAP. LAMINATED DOUBLED 2 X 6'S SHALL BE USED OVER THE TOP OF THE CONTAINERS TO PREVENT DAMAGE BY THE CHAIN AND THE CHAIN SHALL BE SECURED TO THE BOARDS WITH FOUR 20d NAILS BY DRIVING THE NAIL THROUGH THE CHAIN LINK INTO THE BOARD AND CLINCHING THE NAIL OVER THE CHAIN.
3. CHAINS AND LOAD BINDERS SHALL MEET THE FOLLOWING CONDITIONS:
   a. CHAIN AND FITTINGS SHALL BE 3/8 INCH AND LOAD BINDERS 3/8 INCH CAPACITY.
   b. CHAIN, FITTINGS AND LOAD BINDERS SHALL HAVE A MINIMUM BREAK LOAD OF 9,800 LBS.
   c. LOAD BINDERS SHALL BE SAFETY WIRED WITH 16 GAUGE SOFT ANNEALED IRON WIRE OR SECURED USING THE END PIECE OF THE 3/8 CHAIN.

PRIOR TO LOADING THE TRAILER AND DURING THE PRELOADING INSPECTION REQUIRED BY NAVWEPS OP 2165 AND REPORTED ON DD FORM 626, THE CHAINS, FITTINGS AND LOAD BINDERS SHALL BE INSPECTED FOR STRETCH, GOUGING, BENT LINKS, WEAR AND ANY OTHER NOTICEABLE DEFECTS. THE INSPECTOR SHALL CONFIRM THAT THE CHAINS AND LOAD BINDERS HAVE BEEN INSPECTED AND SHALL SO NOTE IN ITEM NO. 22 OF DD FORM 626. ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A CHAIN OR LOAD BINDER.

TABLE I

MISSILE	LOADED CONTAINER WEIGHT (LBS.)	FTL WEIGHT (LBS) △	DOT HAZARD CLASSIFICATION
RIM-66A-1, 2	2,060	37,080	EXPLOSIVES A
RIM-66C	2,100	37,800	EXPLOSIVES A
RIM-66D-1, 2	2,170	39,060	EXPLOSIVES A
RIM-66E-1, 2	2,065	37,170	EXPLOSIVES A
RIM-66H, 66J	2,250	40,500	EXPLOSIVES A

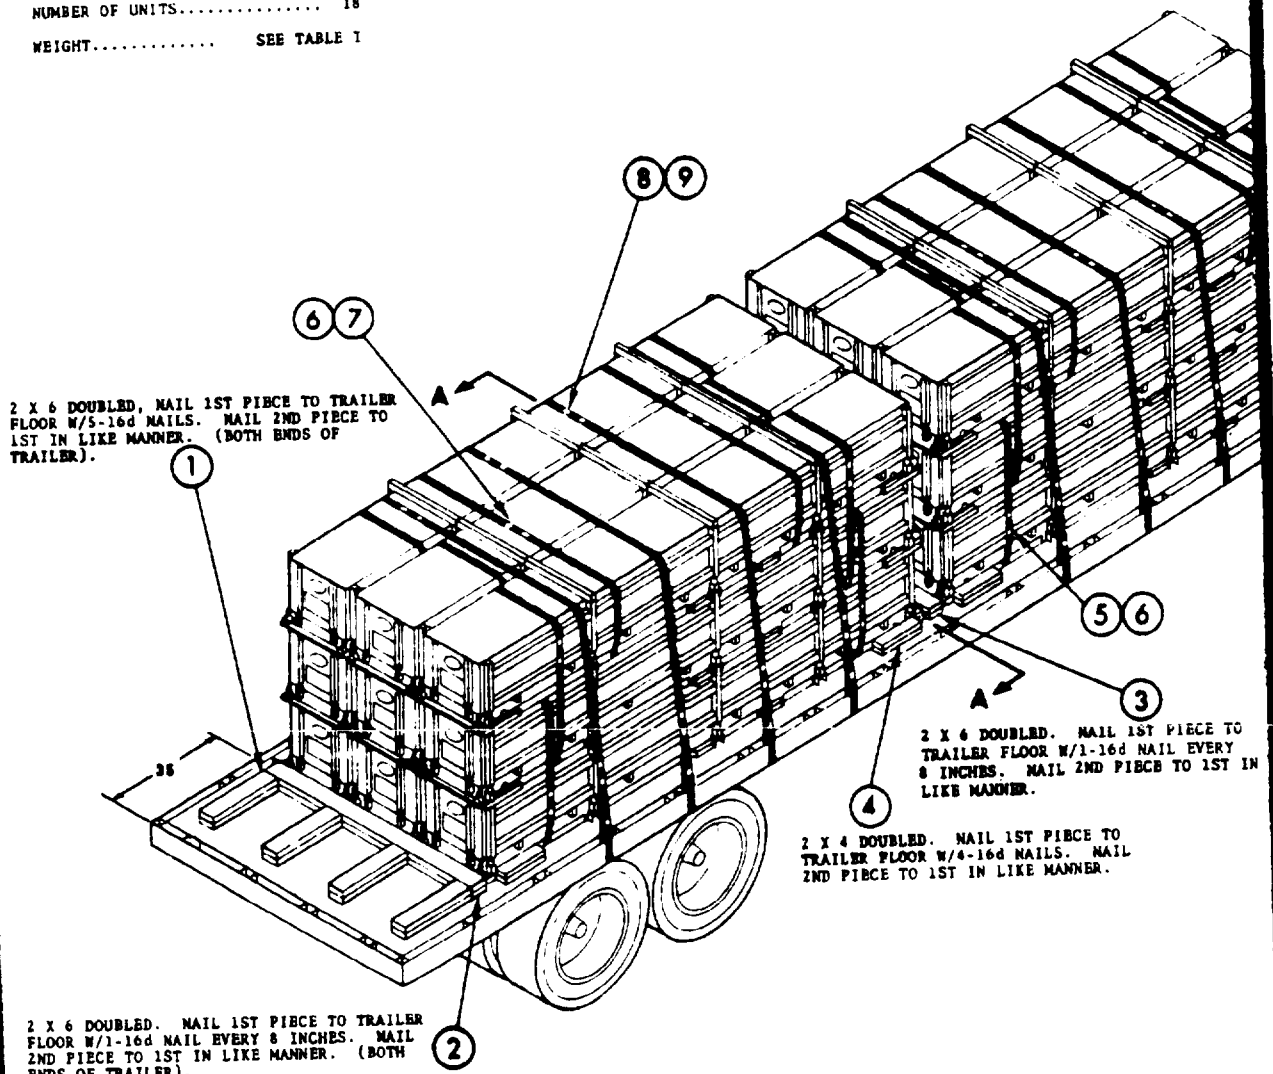
△ DO NOT USE FOR SHIPPING WEIGHT

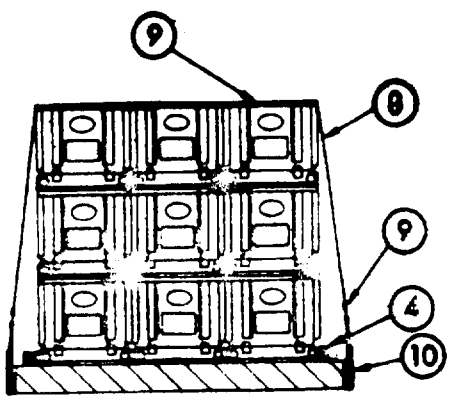
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

TRUCKLOAD DATA

NUMBER OF UNITS..... 18

WEIGHT..... SEE TABLE I





SECTION A-A

PIECE NO.	DESCRIPTION	SIZE	NO. PCS. REQ'D	NAIL TO	NUMBER	SIZE
10	STAKE POCKET PAD (STRAPPING)	2 X .050 X 24	16	SEE LOAD STRAPPING, PAGE 7		
9	SEAL	FOR 2 IN. STRAP	64	-	-	-
8	TIE DOWN STRAP	2 X .050 X 29 FT.	8	SEE LOAD STRAPPING, PAGE 7		
7	CROSS STRAP	1 1/4 X .035 X 20 FT 8 IN.	4	-	-	-
6	SEAL	FOR 1 1/4 STRAP	56	-	-	-
5	UNITIZING STRAP	1 1/4 X .035 X 16 FT	24	SEE PAGE 6		
4	SLEEPER	2 X 4 X 24	16	SEE FIELD NOTE		
3	CROSS MEMBER	2 X 6 X 90	2	SEE FIELD NOTE		
2	CROSS MEMBER	2 X 6 X 90	4	SEE FIELD NOTE		
1	END CLEAT	2 X 6 X 28	16	SEE FIELD NOTE		

LIST OF MATERIAL & NAILING DATA













Source: https://assist.dla.mil - Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

LTL 40 FT TRAILERS (FLATBED)


1. WHEN REQUIRED TO SHIP LESS-THAN-TRUCKLOAD, SELECT THE CORRECT LOAD PATTERN FOR THE NUMBER OF CONTAINERS TO BE SHIPPED FROM TABLE II AND POSITION CONTAINERS ON THE TRAILER ACCORDINGLY.
2. WHEN THE CENTER OF THE TOP LAYER OF A STACK DOES NOT HAVE A CONTAINER(SEE LOAD PLAN FOR 14 CONTAINERS), THE FILLER ASSEMBLY, DETAIL B SHALL BE USED. SECURE THE ASSEMBLY TO THE TIE DOWNS TO PREVENT LONGITUDINAL MOVEMENT.
3. ALL STACKS OF THREE (3) HIGH CONTAINERS SHALL BE SECURED TO THE TRAILER WITH FOUR (4) STRAPS, (OR CHAINS). STACKS OF CONTAINERS TWO (2) HIGH SHALL BE SECURED WITH THREE (3) STRAPS, (OR CHAINS).
4. THE LTL SHOWN ON PAGE 5 IS FOR FOURTEEN (14) CONTAINERS AND SHOWS CORRECT BLOCKING, BRACING AND TIE DOWNS FOR A TRUCKLOAD OF THIS QUANTITY.
5. THE LTL PLAN SHOWN ON PAGE 5 DOES NOT LIMIT SHIPMENTS TO THIS QUANTITY. ITS PRESENTATION IS INTENDED TO EXPLAIN THE CORECT METHODS OF LOADING LTL SHIPMENTS.

TABLE II

LOAD PATTERN *


NO. OF CONTAINERS	FWD	NO. OF CONTAINERS	FWD	NO. OF CONTAINERS	FWD
17		12		7	
16		11		6	
15		10		5	
14		9		4	
13		8		3	

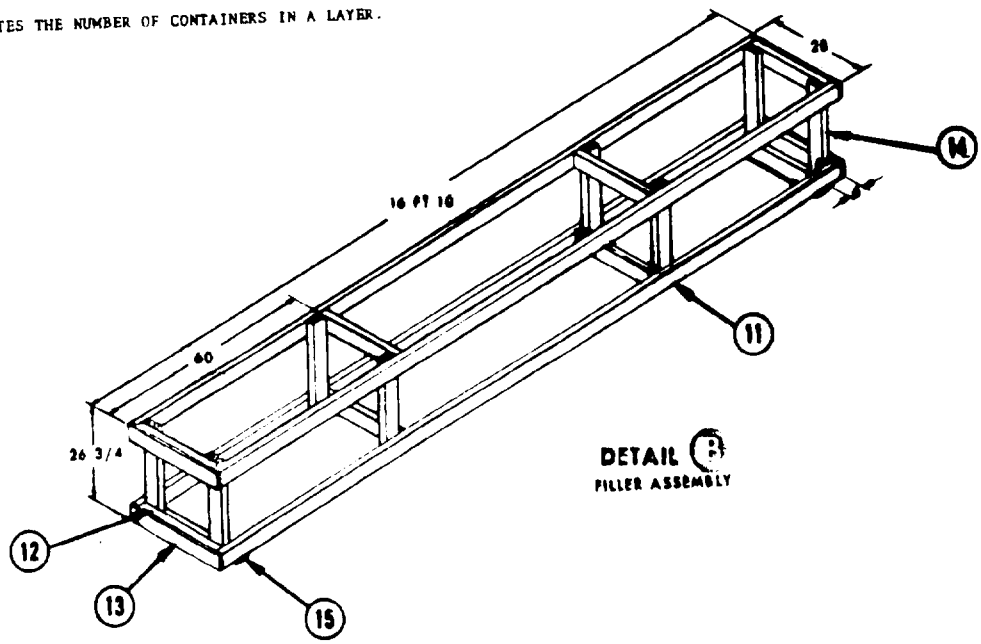* LOAD PATTERN SHOWS FLOOR PLAN FOR TRAILER. NUMBER INDICATES THE NUMBER OF CONTAINERS IN A LAYER.




DETAIL B
FILLER ASSEMBLY

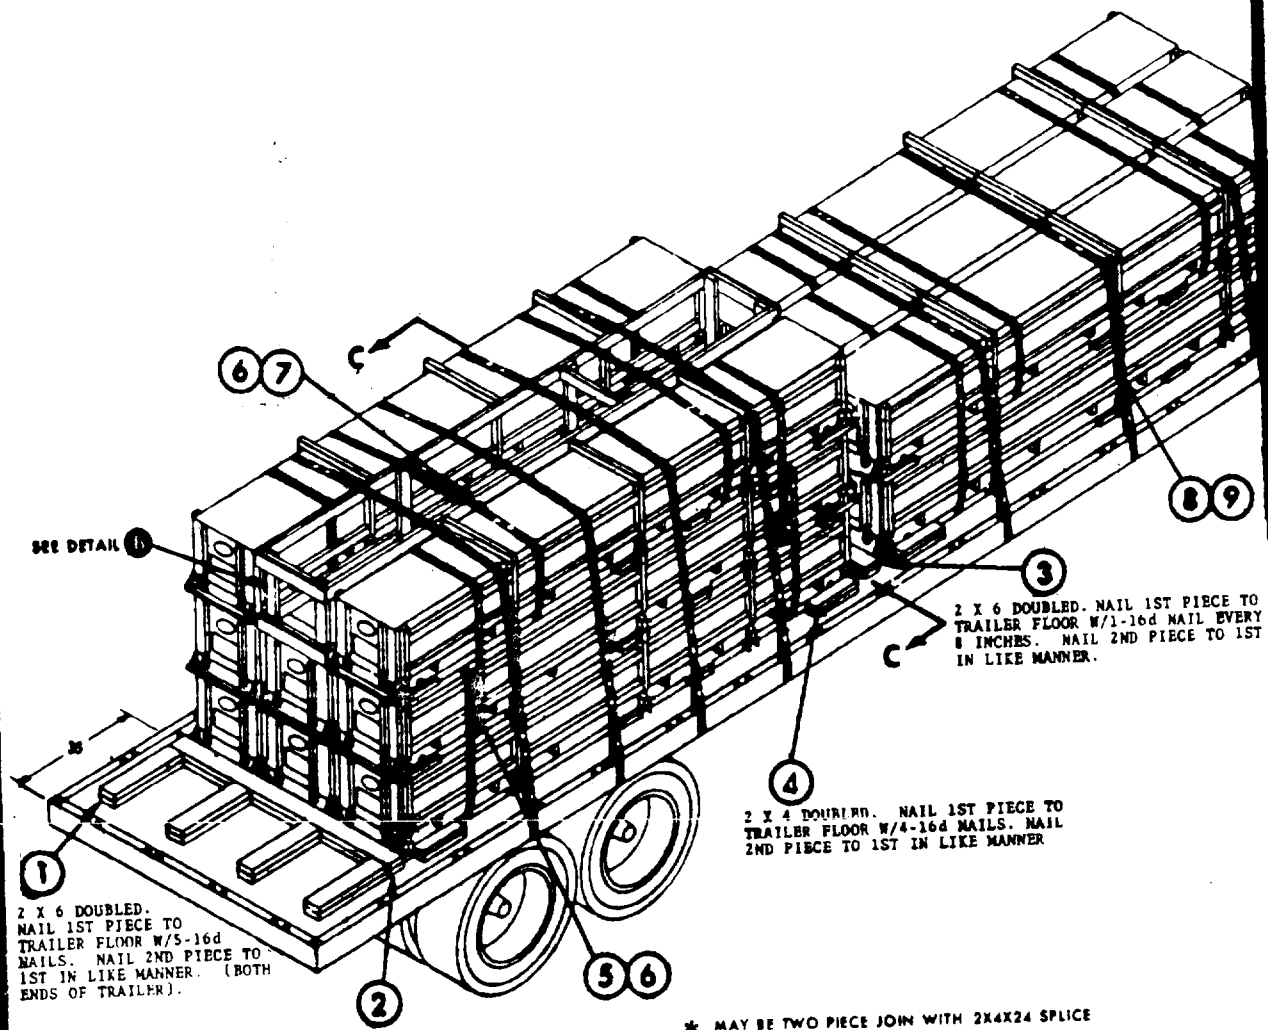Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.



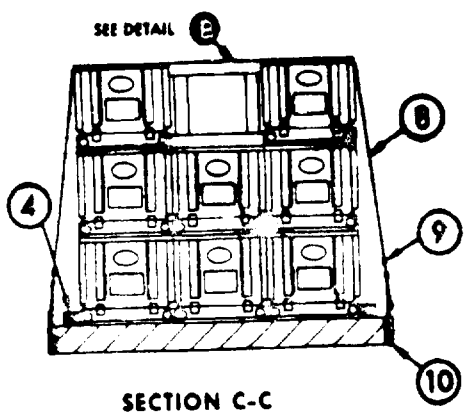2 X 6 DOUBLED. NAIL 1ST PIECE TO TRAILER FLOOR W/1-16d NAIL EVERY 8 INCHES. NAIL 2ND PIECE TO 1ST IN LIKE MANNER. (BOTH ENDS OF TRAILER).



SECTION C-C


* MAY BE TWO PIECE JOIN WITH 2X4X24 SPLICE

PIECE NO.	DESCRIPTION	SIZE	NO. PCS. REQ'D	NAIL TO	NAIL NUMBER	NAIL SIZE
15	SUPPORT	1 X 4 X 28	2	11	2/JOINT	8d
14	VERTICAL	2 X 4 X 26 3/4	8	SEE 11&14	-	-
13	END PIECE	1 X 4 X 28	4	11 & 12	2/JOINT	6d
12	CROSS BRACE	2 X 4 X 25	8	14	2/JOINT	10d
11	HORIZONTAL PIECE	2 X 4 X 16 FT-10 *	4	12 & 14	2/JOINT	16d
10	STAKE POCKET PAD (STRAPPING)	2 X .050 X 24	14	SEE LOAD STRAPPING, PAGE 7		
9	SEAL	FOR 2 IN. STRAP	56	-	-	-
8	TIE DOWN STRAP	2 X .050 X 29 FT	7	SEE LOAD STRAPPING, PAGE 7		
7	CROSS STRAP	1 1/4 X .035 X 20 FT 8 IN.	4	-	-	-
6	SEAL	FOR 1 1/4 STRAP	40	-	-	-
5	UNITIZING STRAP	1 1/4 X .035 X 16 FT	16	SEE PAGE 6		
4	SLEEPER	2 X 4 X 24	16	SEE FIELD NOTE		
3	CROSS MEMBER	2 X 6 X 96	2	SEE FIELD NOTE		
2	CROSS MEMBER	2 X 6 X 96	4	SEE FIELD NOTE		
1	END CLEAT	2 X 6 X 28	16	SEE FIELD NOTE		

LIST OF MATERIALS & NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

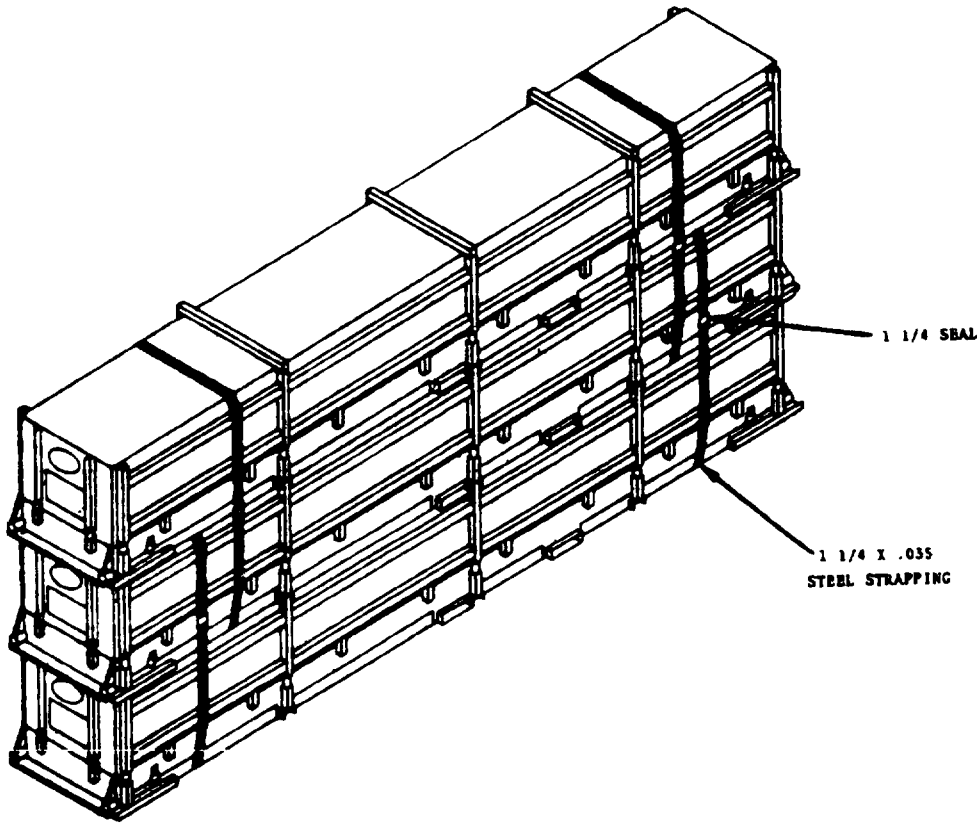UNITIZING AND HANDLING



CONTAINER UNITIZING AND BANDING PROCEDURE:

1. PLACE TWO OR MORE PIECES OF LUMBER CROSSWISE ON FLOOR OR GROUND NEXT TO MISSILE CONTAINER.
2. USING FORK LIFT TRUCK OR AN APPROPRIATE HOISTING DEVICE EQUIPPED WITH MK 77 MOD 3 HOISTING SLING, STACK THREE CONTAINERS ON THE LUMBER PIECES.
3. BE CERTAIN THAT NESTING FEATURES AND BEARING SURFACES ARE PROPERLY POSITIONED TO PREVENT SHIFTING IN LATERAL AND LONGITUDINAL DIRECTIONS.
4. SECURE BOTTOM CONTAINERS TO CENTER CONTAINER WITH TWO STRAPS POSITIONED AS INDICATED ABOVE.
5. TENSION AND DOUBLE NOTCH THE SEALS.
6. REPEAT THIS OPERATION TO SECURE CENTER CONTAINERS TO TOP CONTAINER.

CONTAINER HANDLING PROCEDURE:

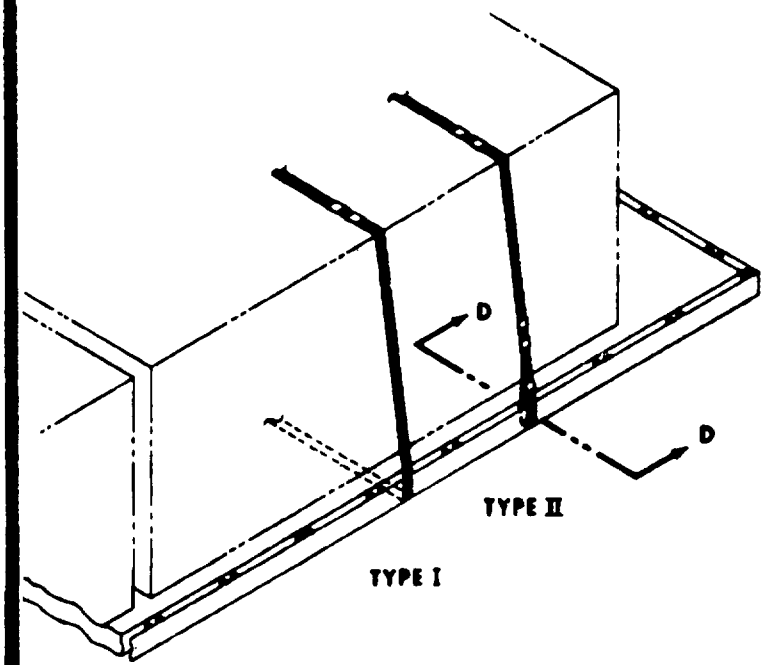
1. UNITIZED CONTAINER MK 372 MODS 2, 3 OR 5 FOR STANDARD MISSILE ARE HANDLED AND POSITIONED ON FLATBED TRAILERS WITH A SUITABLE FORK LIFT TRUCK. IF NECESSARY, CONTAINERS CAN BE LOADED ONE AT A TIME USING AN APPROPRIATE HOISTING DEVICE EQUIPPED WITH MK 77 MOD 3 HOISTING SLING, AND UNITIZED IN POSITION.

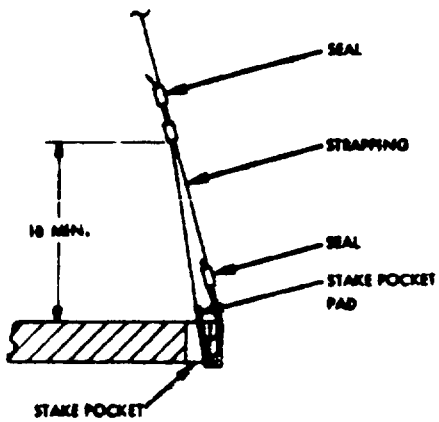
WARNING

TO AVOID TOPPLING, SPECIAL CARE SHOULD BE TAKEN WHEN MOVING STACKS OF CONTAINERS. THE UNITIZING OF THE CONTAINERS IS AUTHORIZED AS PART OF THE TRUCKLOADING PROCEDURE ONLY. UNITIZING IS TO ENSURE CONTINUOUS ENGAGEMENT OF THE STACKING FEATURES AND MOVEMENT OF UNITIZED CONTAINERS SHOULD BE LIMITED TO THAT NECESSARY TO LOAD AND UNLOAD THE FLATBED TRAILER. CONTAINERS SHALL BE DEUNITIZED AFTER UNLOADING THE VEHICLE.

Source: https://assist.dla.mil - Downloaded: 2020-10-23T23:48Z
Check the source to verify that this is the current version before use.

LOAD STRAPPING





SECTION D-D

THE FOLLOWING TWO METHODS OF TIE-DOWN STRAPPING ARE APPROVED FOR USE WITH SHIPMENT OF LOADS ON FLATBED TRAILERS. STEEL STRAPPING SHALL BE IN ACCORDANCE WITH FEDERAL SPECIFICATION QQ-S-781. STRAPPING SEALS SHALL HAVE A MINIMUM TENSILE STRENGTH EQUAL TO 75 PERCENT OF THE STRAP STRENGTH. FOR EACH OF THE TYPES ILLUSTRATED ABOVE IT IS PREFERRED TO POSITION, TENSION AND DOUBLE CRIMP THE STRAP SEALS AT THE TOP OF THE LOAD.

TYPE I - CONTINUOUS STRAPPING AROUND THE FLATBED AND THE LOAD

TYPE II- THE STRAPPING IS SECURED TO THE STAKE POCKETS, ONE PIECE ON EACH SIDE OF THE TRAILER, AND IS BROUGHT UP OVER THE LOAD, TENSIONED, AND SEALED WITH THE DOUBLE-CRIMPED SEALS ON THE TOP. METHOD OF SECURING STRAPPING TO STAKE POCKET IS SHOWN IN SECTION D-D. THE SHORT END IS ON THE INSIDE AND IS SECURED WITH TWO DOUBLE-CRIMPED SEALS AT A MINIMUM OF 10 INCHES ABOVE THE TRAILER BED. A STAKE POCKET PAD (A SHORT PIECE OF THE SAME STRAPPING 10 INCHES LONG) IS INSERTED BETWEEN THE MAIN STRAP AND THE STAKE POCKET AND IS SECURED TO THE MAIN STRAP WITH A SEAL AS SHOWN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commanding Officer
Navy Weapons Station Earle
Attn: NWHC (Code 803-SRP)
Colts Neck, NJ 07722-5000

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.