MILITARY STANDARD

MIL-STD-1320-247
(NAVY)
12 JUL 1989

TRUCKLOADING


UNIT LOADS

AIM-9M (SIDEWINDER) AND AGM-122A (SIDEARM)


IN CONTAINERS CNU-435/E AND CNU-434/E RESPECTIVELY

UNIT LOAD DATA

UNIT LOAD DOCUMENTS MIL-STD-1323-352, 354
DIMENSIONS . . . . 134 L X 36 1/4 W X 38 1/4 H
GROSS WEIGHT . . . . . 2604 OR 2774 LBS Δ
CUBE . . . . . 107.5 CU FT
Δ DO NOT USE FOR SHIPPING WEIGHT



HAZARD CLASSIFICATION		
DODIC/NALC	ITEM NAME	DOT
PB55	AIM-9M	CLASS A
PC06	AGM-122A	CLASS A

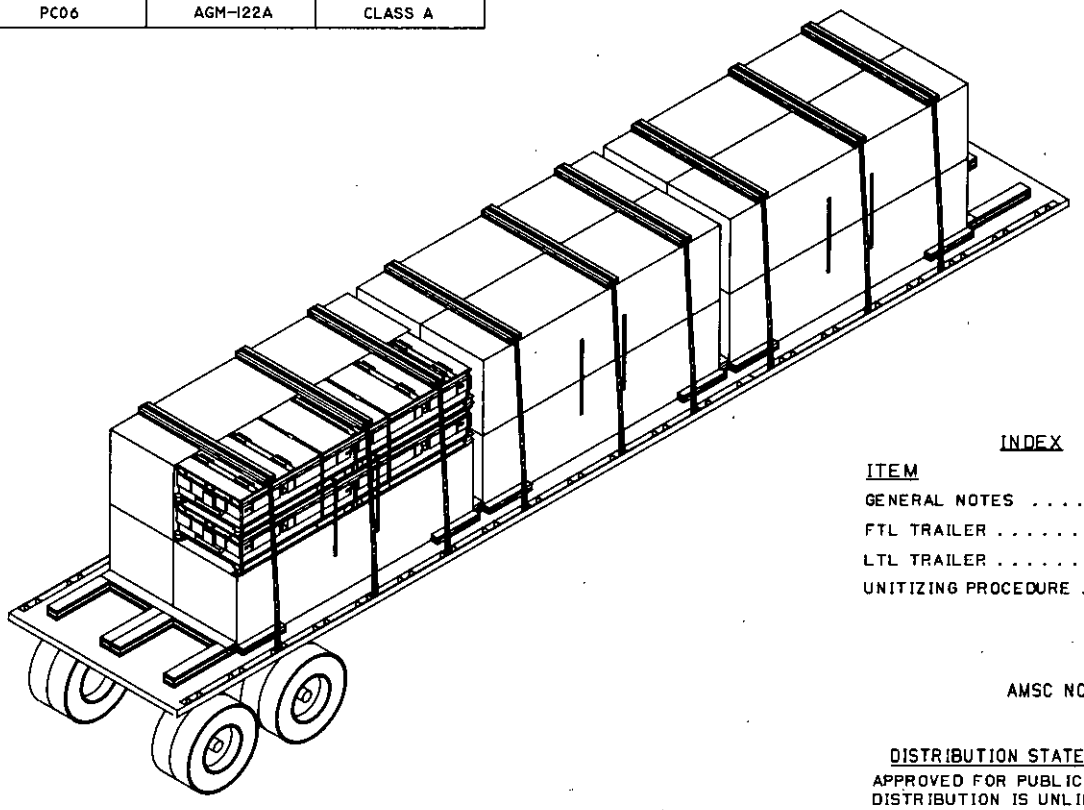

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL TRAILER	3
LTL TRAILER	4
UNITIZING PROCEDURE	5

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
			APPROVAL	

FSC 8140

AUTHORIZED AND RELEASED
FOR HIGHWAY SHIPMENT ONLY.

SIGNATURE TDA, WPNSTA EARLE DATE 7/12/89

SIGNATURE AIRSYSCOM BY DIRECTION DATE 7/12/89

ORIGINATOR DATE 7/12/89

WPNSTA EARLE, NEW JERSEY


Source: https://assist.dla.mil -- Downloaded: 2026-10-23 23:49:52
Check the source to verify that this is the current version before use.

GENERAL NOTES


1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING AIM-9M (SIDEWINDER) AND AGM-122A (SIDEARM) IN SHIPPING AND STORAGE CONTAINERS CNU-435/E AND CNU-434/E, RESPECTIVELY.
2. THE PROCEDURES DESCRIBED HEREIN ARE INTENDED FOR 42 FT THROUGH 48 FT FLATBED TRAILERS WITH THE TRAILER'S TANDEM AXLES LOCATED IN THE "WESTERN POSITION" (AT THE EXTREME REAR OF THE TRAILER). DO NOT USE TRAILERS WITH METAL FLOORS.
3. CHAINS AND STEEL STRAPPING MAY BE USED INTERCHANGEABLY ON A ONE-TO-ONE BASIS FOR TIEDOWNS.
4. STEEL STRAPPING USED AS TIEDOWNS SHALL BE 2 X .050 AND SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).
5. CHAINS, FITTINGS, AND LOAD BINDERS SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY) EXCEPT THAT THE CHAIN/GRAB HOOKS SHALL BE ATTACHED TO THE STAKE POCKETS (NOT AROUND THE RUB RAIL).
6. PROTECTOR BOARDS (DOUBLED 2 X 6'S) SHALL BE USED UNDER THE TIEDOWNS WHEN USING STEEL STRAPPING. THE STRAPS SHALL BE STAPLED TO THE PROTECTOR BOARD USING 2-INCH STRAPPING STAPLES. WHEN USING CHAIN, THE CHAINS SHALL BE SECURED TO THE PROTECTOR BOARD BY DRIVING A 10d NAIL THROUGH THE CHAIN LINK AND CLINCHING THE NAIL OVER THE CHAIN. FIVE STAPLES/NAILS SHALL BE USED FOR EACH TIEDOWN.
7. PRIOR TO LOADING THE TRAILER AND DURING PRELOADING INSPECTION, REQUIRED BY NAVSEA OP 2165 AND REPORTED ON DD FORM 626, THE CHAINS, FITTINGS, AND LOAD BINDERS SHALL BE INSPECTED FOR STRETCH, GOUGING, BENT LINKS, WEAR AND ANY OTHER NOTICEABLE DEFECTS. THE INSPECTOR SHALL CONFIRM THAT THE CHAINS, FITTINGS, AND LOAD BINDERS HAVE BEEN INSPECTED AND SHALL SO NOTE IN ITEM NO. 22 OF DD FORM 626. ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A CHAIN OR LOAD BINDER.
8. UNLESS OTHERWISE SPECIFIED, DUNNAGE LUMBER, STEEL STRAPPING, STRAP SEALS, AND NAILS SHALL BE AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).
9. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR TRAILER WILL NOT EXCEED THESE LIMITATIONS.
10. AFTER THE BLOCKING, BRACING, AND TIEDOWNS HAVE BEEN INSPECTED, THE CONTAINERS SHALL BE COMPLETELY COVERED WITH FIRE RESISTANT, WATERPROOF TARPAULINS. THE TARPAULINS MAY BE UNDER THE TIEDOWNS.
11. AFTER THE TARPAULINS ARE IN PLACE, ATTACH "EXPLOSIVES" PLACARDS, AS APPLICABLE, TO BOTH SIDES, FRONT AND BACK OF THE TRAILER AND ATTACH THE SHIPPING DOCUMENTS TO AN ACCESSIBLE AREA ON THE BACK DECK OF THE TRAILER.
12. FOR GENERAL TRUCKLOADING PROCEDURES, REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

NOTE: TARPAULINS OVER UNIT LOADS OMITTED.

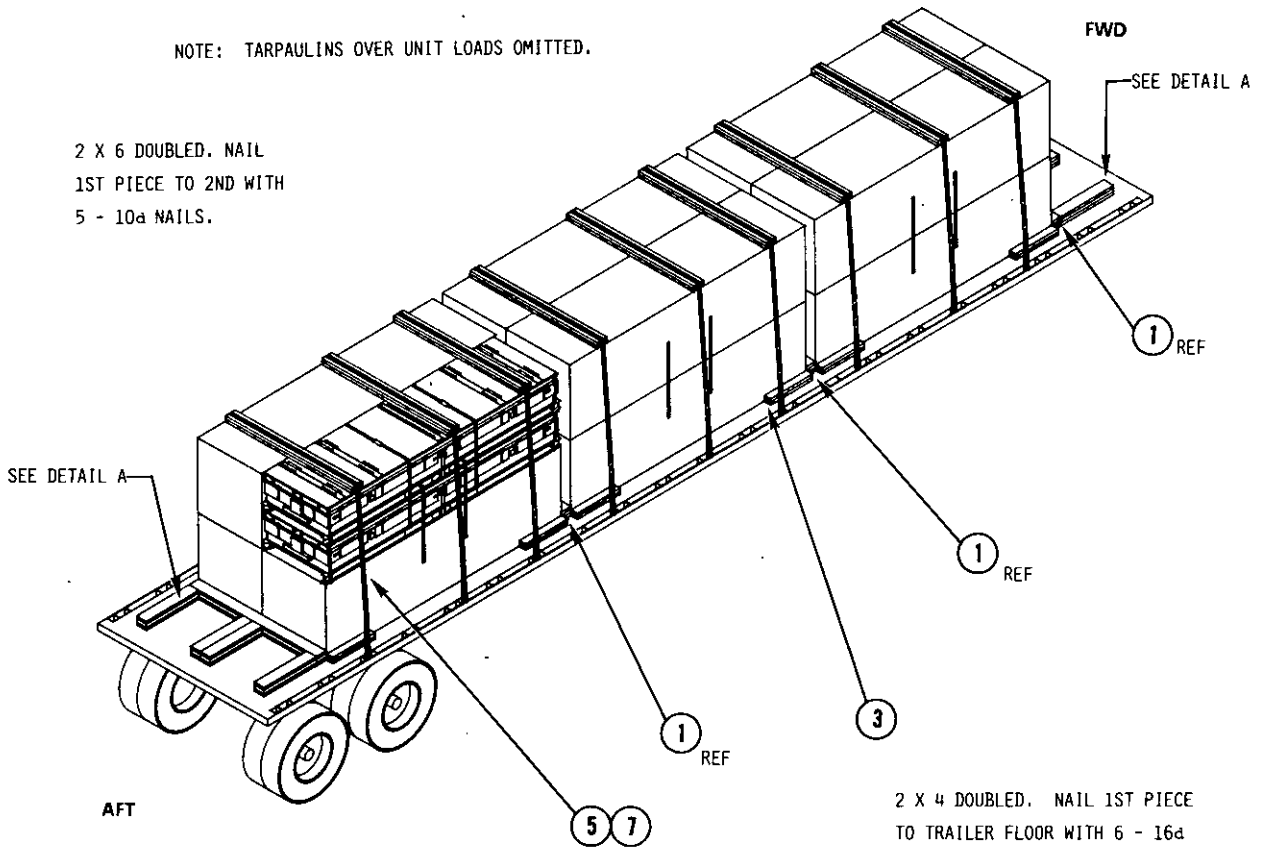

2 X 4 DOUBLED. NAIL 1ST PIECE TO TRAILER FLOOR WITH 6 - 16d NAILS. NAIL 2ND PIECE TO 1ST IN LIKE MANNER.

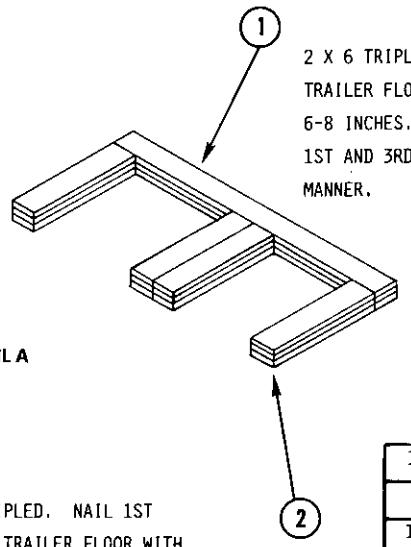

2 X 6 TRIPLED. NAIL 1ST PIECE TO TRAILER FLOOR WITH 16 NAILS EVERY 6-8 INCHES. NAIL 2ND PIECE TO 1ST AND 3RD PIECE TO 2ND IN LIKE MANNER.

DETAIL A

2 X 6 TRIPLED. NAIL 1ST PIECE TO TRAILER FLOOR WITH 8 - 16d NAILS. NAIL 2ND PIECE TO 1ST AND 3RD PIECE TO 2ND IN LIKE MANNER.

TRUCKLOAD DATA

42 THROUGH 48 FT TRAILER

	NO. OF UNIT LOADS	FTL WEIGHT
SIDEWINDER	12	31,248
SIDEARM	12	33,288

FTL 42 THROUGH 48 FT TRAILER (FLATBED) (42 FT SHOWN)

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
12	8	SEAL	SEE NOTE 8 PAGE 2	1-1/4
9	7	SEAL	SEE NOTE 8 PAGE 2	2
12	6	STEEL STRAP	SEE NOTE 8 PAGE 2	1-1/4 X .035 X 14 FT
54	5	STEEL STRAP	SEE NOTES 3,4 &8 PAGE 2	2 X .050 X 22 FT
18	4	PROTECTOR BOARD	SEE NOTE 6&8 PAGE 2	2 X 6 X 70
24	3	SLEEPER	SEE NOTE 8 PAGE 2	2 X 4 X 24
24	2	BACKUP CLEAT	SEE NOTE 8 PAGE 2	2 X 6 X 30
12	1	CROSSMEMBER	SEE NOTE 8 PAGE 2	2 X 6 X 72


LIST OF MATERIALS PAGE 3


Source: https://assist.dla.mil - Downloaded: 20260128:49Z
Check the source to verify that this is the current version before use.

LTL 42 FT AND LONGER TRAILERS (FLATBED)

1. WHEN REQUIRED TO SHIP LESS-THAN-TRUCKLOAD, SELECT THE CORRECT LOAD PATTERN FOR THE NUMBER OF UNIT LOADS TO BE SHIPPED FROM TABLE I.
2. POSITION UNIT LOADS ON THE TRAILER AS SHOWN IN TABLE I. BLOCK AND TIEDOWN USING THE PRINCIPLES SHOWN ON THIS PAGE AND PAGES 2 AND 3 OF THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).
3. THE NUMBERS ON EACH ROW OF A STACK IS THE NUMBER OF UNIT LOADS STACKED IN THE ROW.
4. SEE DETAIL B FOR BLOCKING AND BRACING VARIATIONS FOR LTL.
5. FOR UNITIZING, SEE DETAIL C, PAGE 5.

TABLE I

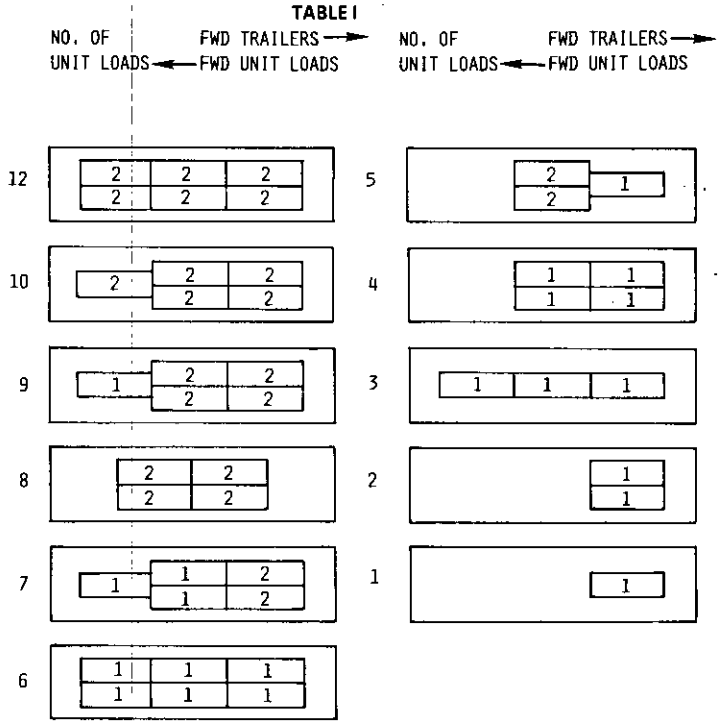

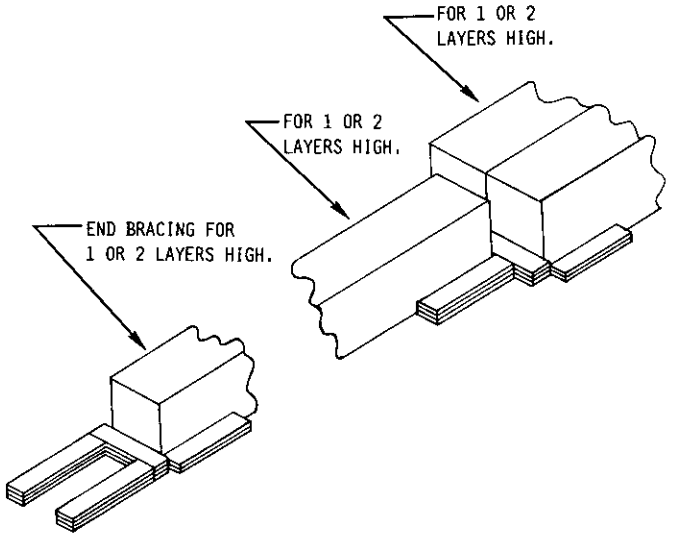

DETAIL B

LTL BLOCKING AND BRACING


Source: https://assist.dla.mil -- Downloaded: 202610-23T23:49Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE

1. USING A 6,000 LB FORKTRUCK, STACK ONE UNIT LOAD ON TOP OF THE FIRST UNIT LOAD. BE SURE TO ALIGN THE STACKING FEATURES. POSITION TWO 1-1/4 X .035 STEEL STRAPS THROUGH THE FORK POCKETS OF THE TOP UNIT LOAD AND BOTTOM UNIT LOAD AS SHOWN. TENSION AND SEAL WITH ONE DOUBLE NOTCH SEAL FOR EACH STRAP.

WARNING

WHEN LOADING/UNLOADING TRAILERS WITH UNITIZED LOADS, EXTRA CAUTION SHOULD BE TAKEN TO PREVENT TOPPLING. SPECIAL ATTENTION SHOULD BE GIVEN TO APPROPRIATE BACKUP OF OUTBOARD UNITIZED LOADS.

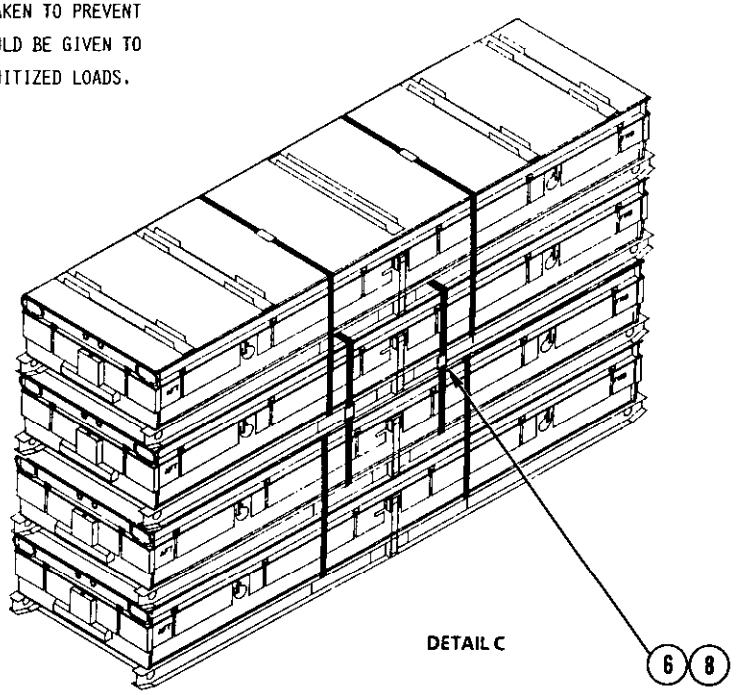

WARNING

TO AVOID TOPPLING, SPECIAL CARE SHOULD BE TAKEN WHEN MOVING STACKS OF UNITIZED LOADS. THE UNITIZING OF THE UNIT LOAD IS AUTHORIZED AS PART OF THE TRUCKLOADING PROCEDURE ONLY. UNITIZING IS TO ENSURE CONTINUOUS ENGAGEMENT OF THE STACKING FEATURES AND MOVEMENT OF UNITIZED LOADS SHOULD BE LIMITED TO THAT NECESSARY TO LOAD AND UNLOAD THE FLATBED TRAILER. UNITIZED LOADS SHALL BE DEUNITIZED AFTER UNLOADING THE VEHICLE.

REVIEW ACTIVITY:
NAVY - OS

PREPARING ACTIVITY:
NAVY - OS
(PROJECT NO. 8140-N833)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

*U.S. GOVERNMENT PRINTING OFFICE: 1989--704-034/14275

FOLD

POSTAGE AND FEES PAID

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commanding Officer
Naval Weapons Station Earle
Code 804 - M. Shelly
Colts Neck, New Jersey 07722-5000

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-STD-1323-351 2.75 Inch Warheads, M261 or M267 in Container PA 92

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 202610-23T23:49Z
Check the source to verify that this is the current version before use.