MILITARY STANDARD

MIL-STD-1320-260 A
(NAVY)

2 JUNE 1993

SUPERSEDING MIL-STD-1320-260
29 JULY 1991

TRUCKLOADING

AMRAAM MIXED LOAD

WINGS AND FINS IN CNU-452/E CONTAINER (DOMESTIC UNIT LOAD)

GUIDENCE SECTION IN CNU-463/E CONTAINER

PROPULSION SECTION IN CNU-464/E CONTAINER


WARHEAD SECTION IN CNU-545/E CONTAINER (DOMESTIC UNIT LOAD)

CONTROL SECTION IN CNU-546/E CONTAINER (DOMESTIC UNIT LOAD)

CONTAINER/UNIT LOAD DATA

SEE PAGE 3 FOR FULL DESCRIPTIVE DATA

FOR HAZARD CLASSIFICATION
SEE SW020-AC-SAF-010/020/030

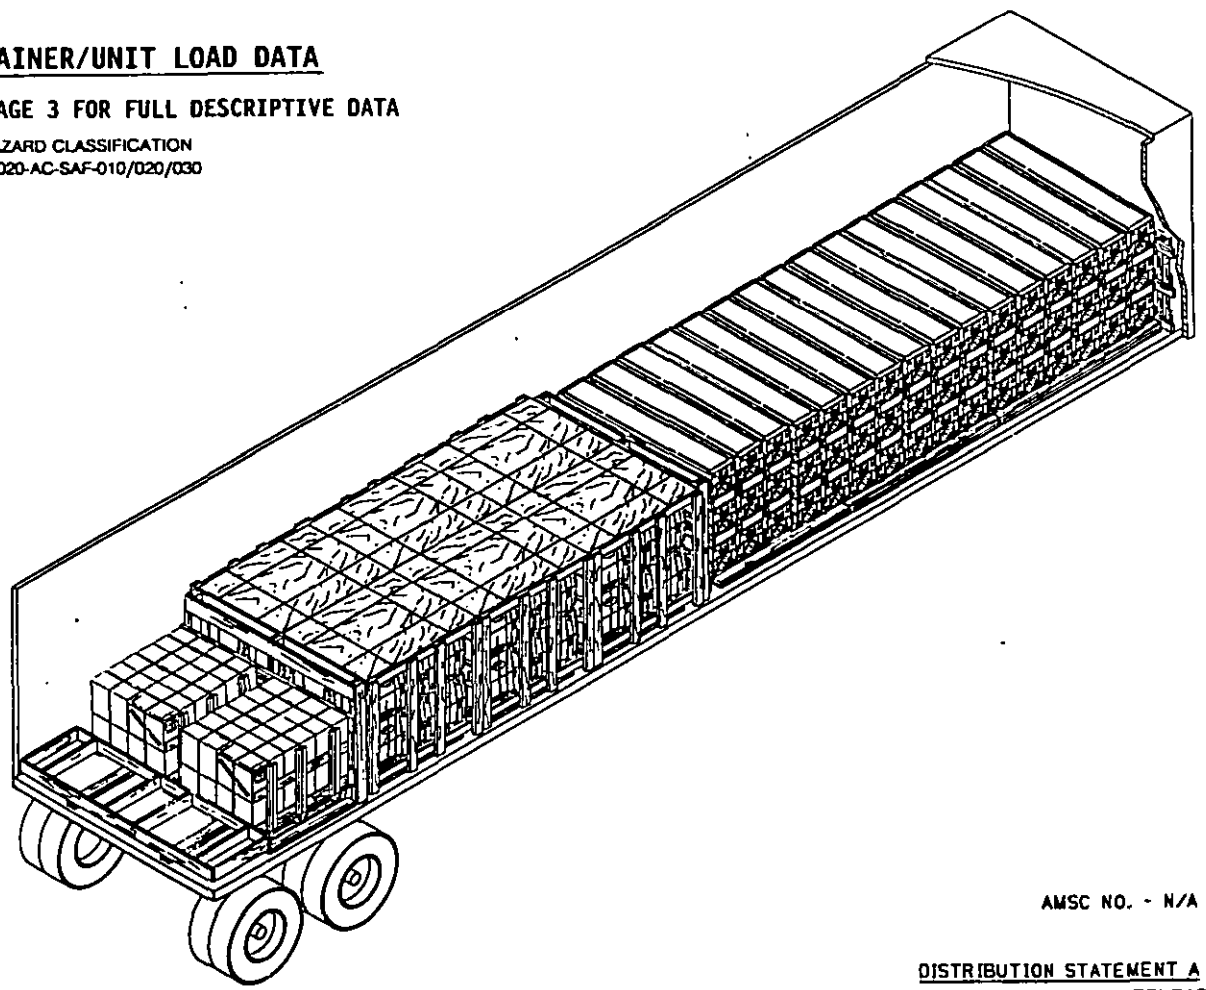

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
			APPROVAL	
A	DELETED UNIT LOADS CNU-402 & 403/E ADDED UNIT LOADS CNU-545 & 546/E REVISED BLOCKING & BRACING PROCEDURE	6/2/93		

NOTES:
1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

FSC 8140

AUTHORIZED AND RELEASED
FOR HIGHWAY SHIPMENT ONLY.

SIGNATURE TDA, WPNSTA EARLE DATE 7/21/94

SIGNATURE APPROVED BY DIRECTION DATE

ORIGINATOR 7/21/94 DATE

WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 20260-23123:492
Check the source to verify that this is the current version before use.


GENERAL NOTES:

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR MIXED TRUCKLOADING THE AMRAAM CONTROL, WARHEAD, GUIDANCE, PROPULSION, AND WING AND FIN SECTIONAL CONTAINERS THE UNIT LOADS FOR THE WARHEAD, CONTROL, AND WING AND FIN CONTAINERS SHALL BE IAW MIL-STD-1322-898/-899/-364 RESPECTIFULLY
2. THE PROCEDURES DESCRIBED HEREIN ARE INTENDED FOR 40 FT OR LONGER ENCLOSED TRAILERS. DO NOT USE TRAILERS WITH ALL METAL FLOORS.
3. GUIDANCE AND PROPULSION CONTAINERS SHALL BE FORWARD OF ALL CONTROL, WARHEAD AND WING AND FIN UNIT LOADS INSIDE THE TRAILER.
4. FOR A FULL (MIXED) TRUCKLOAD OF (144 CONTAINERS) SEE PAGE 3.
5. FOR LESS THAN, OR FOR VARIOUS MIXED QUANTITIES SEE THE BLOCKING, BRACING, AND INTERFACING PROCEDURES AS SHOWN ON PAGES 8 THRU 11 .
6. DO NOT STACK LOOSE CONTROL, WARHEAD, OR WING AND FIN CONTAINERS IN THE TRAILER, THEY MUST BE UNITIZED.
7. UNLESS OTHERWISE SPECIFIED, ALL DUNNAGE LUMBER, STEEL STRAPPING, STRAP SEALS, AND NAILS SHALL BE AS SPECIFIED IN THE GENERAL DOCUMENT MIL-STD-1320 (NAVY).
8. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS, AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
9. AFTER THE BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH THE SHIPPING DOCUMENTS TO AN ACCESSIBLE AREA INSIDE THE TRAILER. ATTACH THE PROPER EXPLOSIVES PLACARDS TO BOTH SIDES, FRONT , AND BACK OF THE TRAILER.
10. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).

Source: https://assist.dla.mil -- Downloaded: 202640-23T23:49Z
Check the source to verify that this is the current version before use.


FULL TRUCK LOAD (MIXED)

THIS LAYOUT REPRESENTS A FULL MIXED TRUCKLOAD CONSISTING OF (144 CONTAINERS). WHEN SHIPPING VARIOUS QUANTITIES OR LESS THAN TRUCKLOAD SEE BLOCKING & BRACING, AND INTERFACING TECHNIQUES AS SHOWN ON PAGES 8 THRU 12.

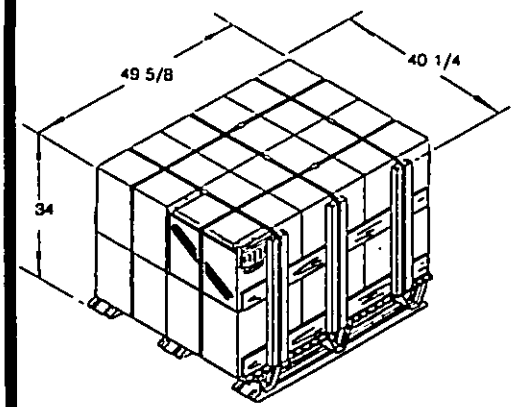


CNU-452/E (REF UNIT LOAD MIL-STD-1323-364)
WEIGHT 1,130 LBS.

CNU-545/E (REF UNIT LOAD MIL-STD-1322- 898
OR
CNU-546/E (REF UNIT LOAD MIL-STD- 1322-899

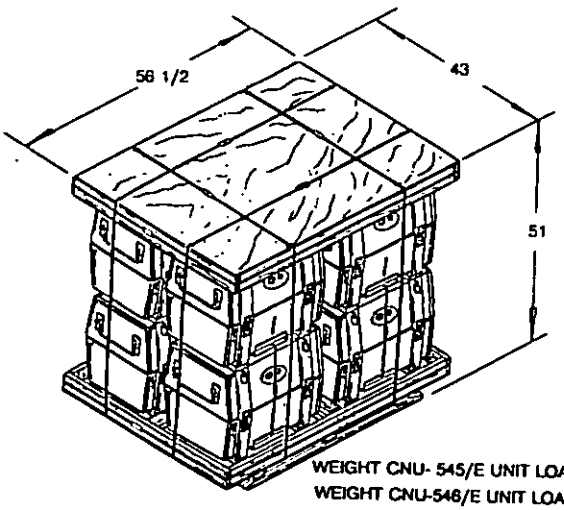


WEIGHT CNU- 545/E UNIT LOAD 1,314 LBS.
WEIGHT CNU-546/E UNIT LOAD 1,154 LBS.

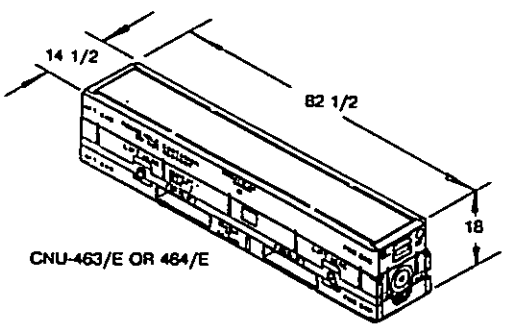


CNU-463/E OR 464/E

CNU-463/E WEIGHT 290 LBS.
CNU-464/E WEIGHT 353 LBS.

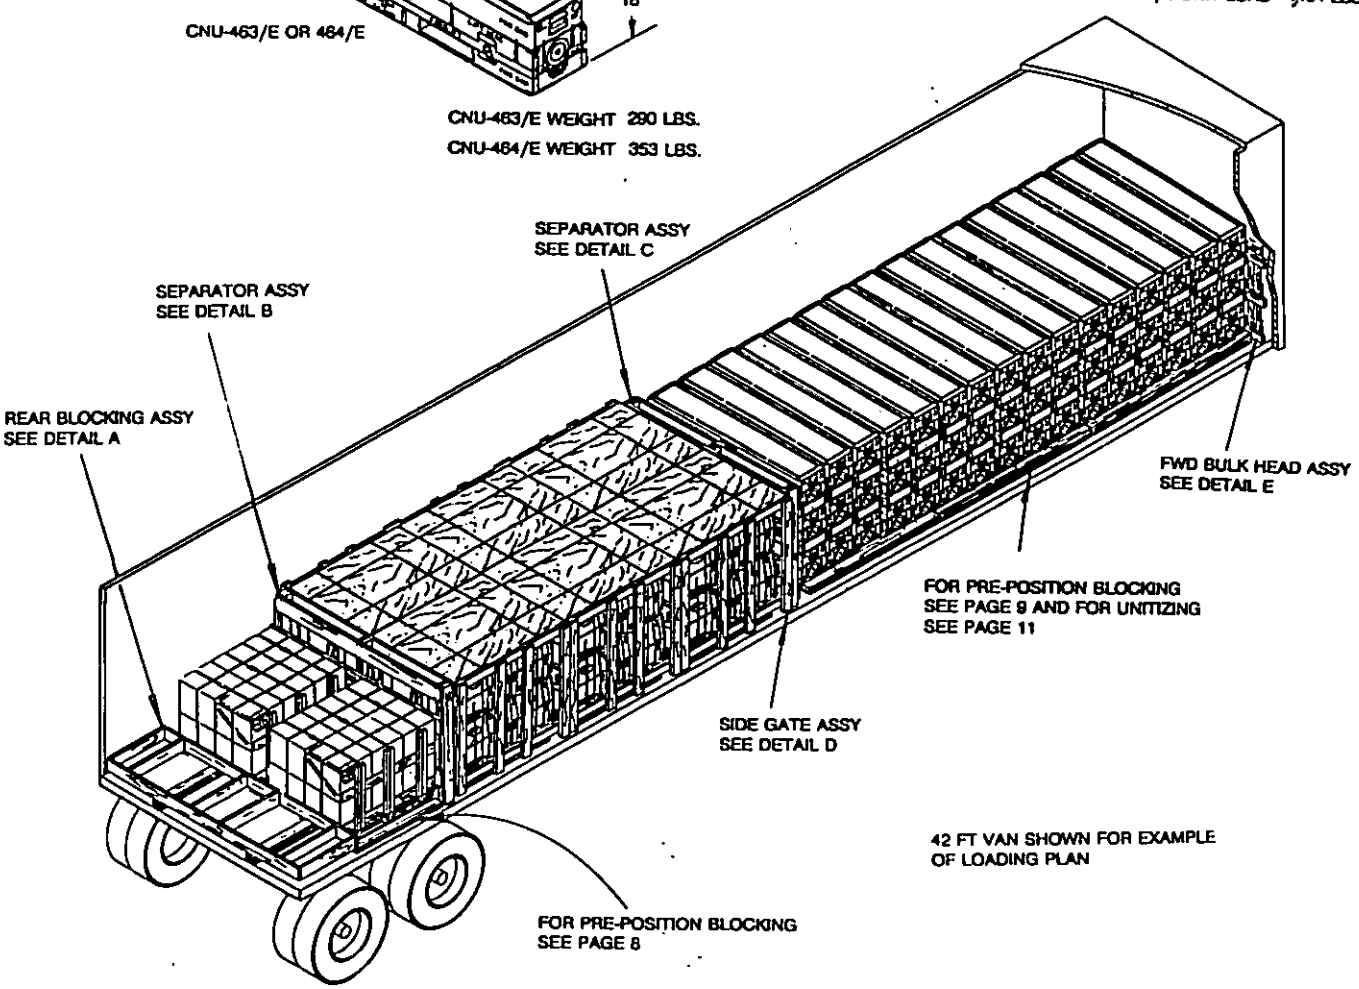

42 FT VAN SHOWN FOR EXAMPLE OF LOADING PLAN


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

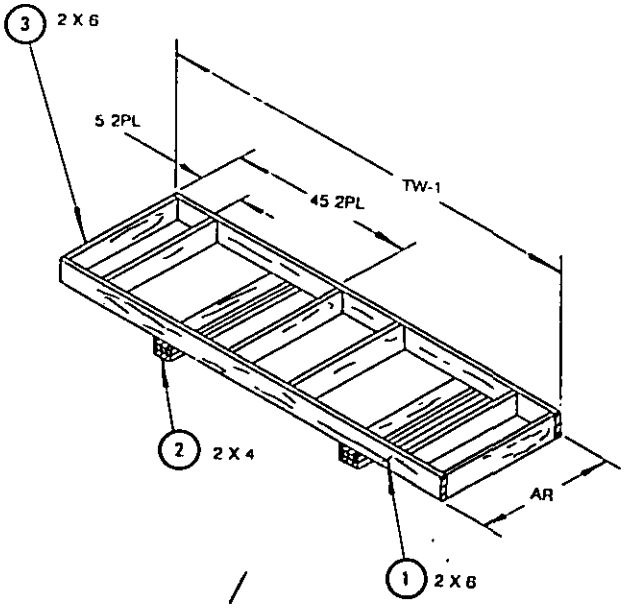

DETAIL A JOIN TOGETHER W/2-10d NAILS/JOINT


REAR BLOCKING

FOR USAGE WITH CNU/452 UNIT LOAD
OR CNU-463 & 464 CONTAINERS

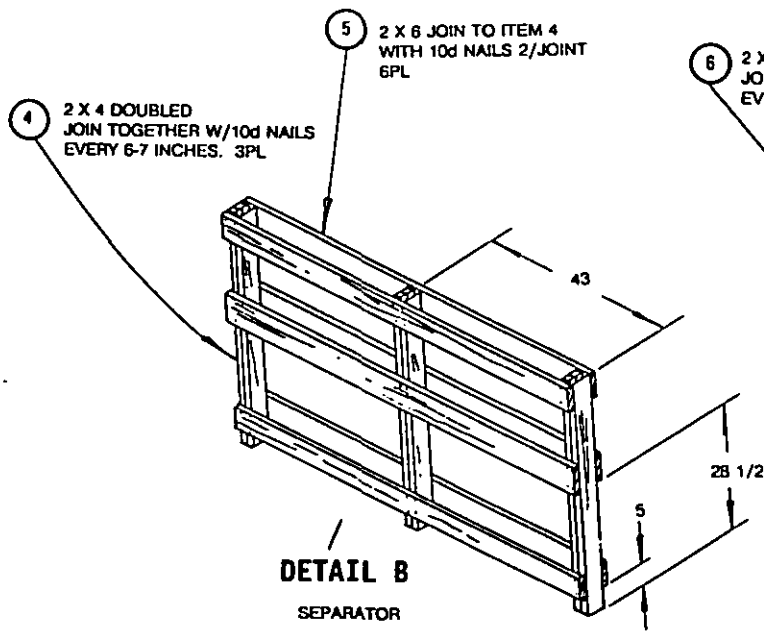


DETAIL B

SEPARATOR

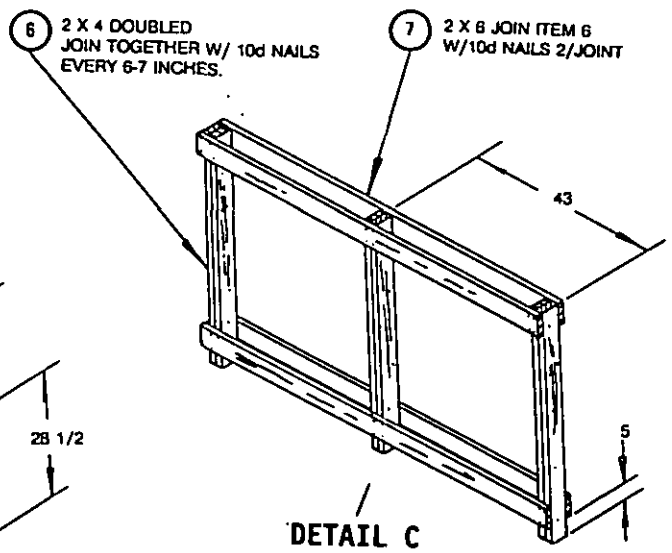

DETAIL C


SEPARATOR

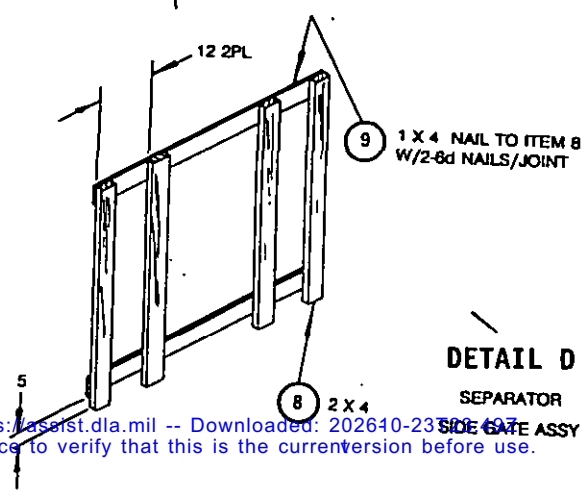

DETAIL D


SEPARATOR
SIDE GATE ASSY

Source: https://easist.dla.mil -- Downloaded: 20261O-2330E497
Check the source to verify that this is the current version before use.

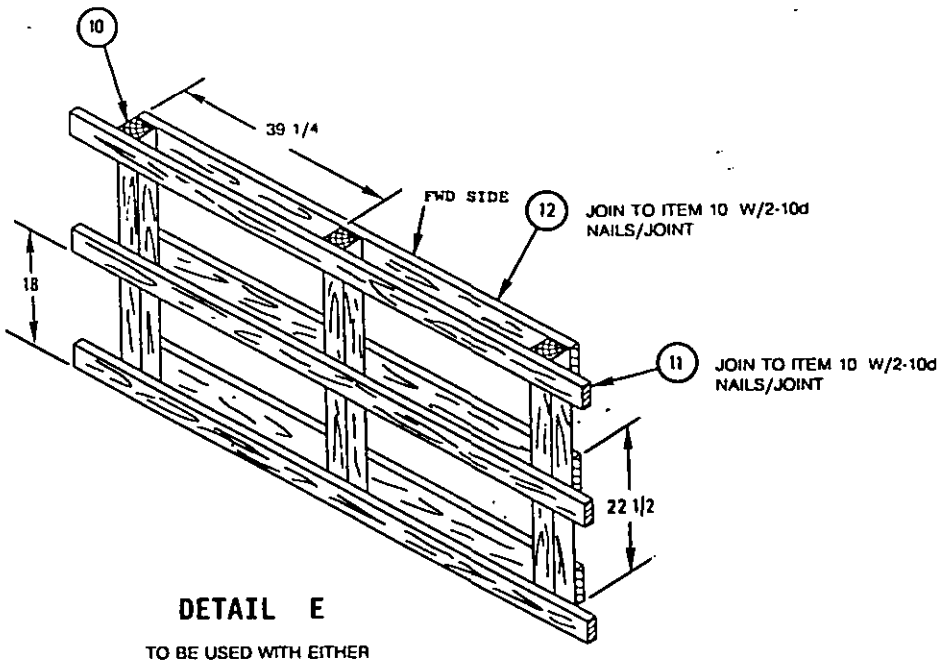

DETAIL E


TO BE USED WITH EITHER CNU-463/E OR 464/E CONTAINER.

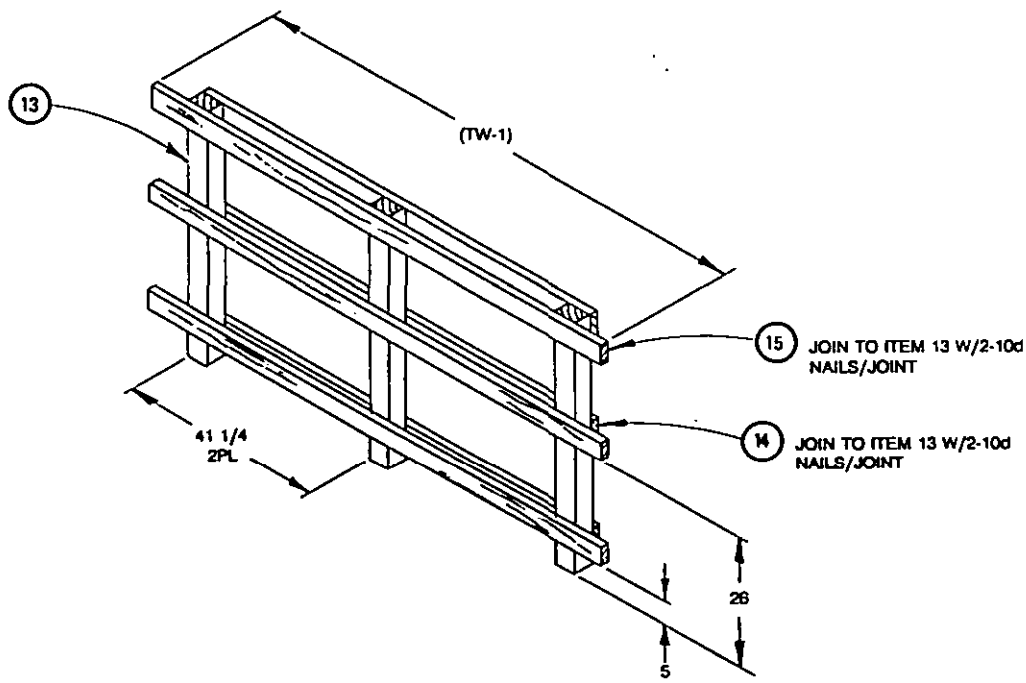

DETAIL F


FWD BULK HEAD ASSEMBLY FOR USAGE WITH CNU-545/E OR 546/E UNIT LOAD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

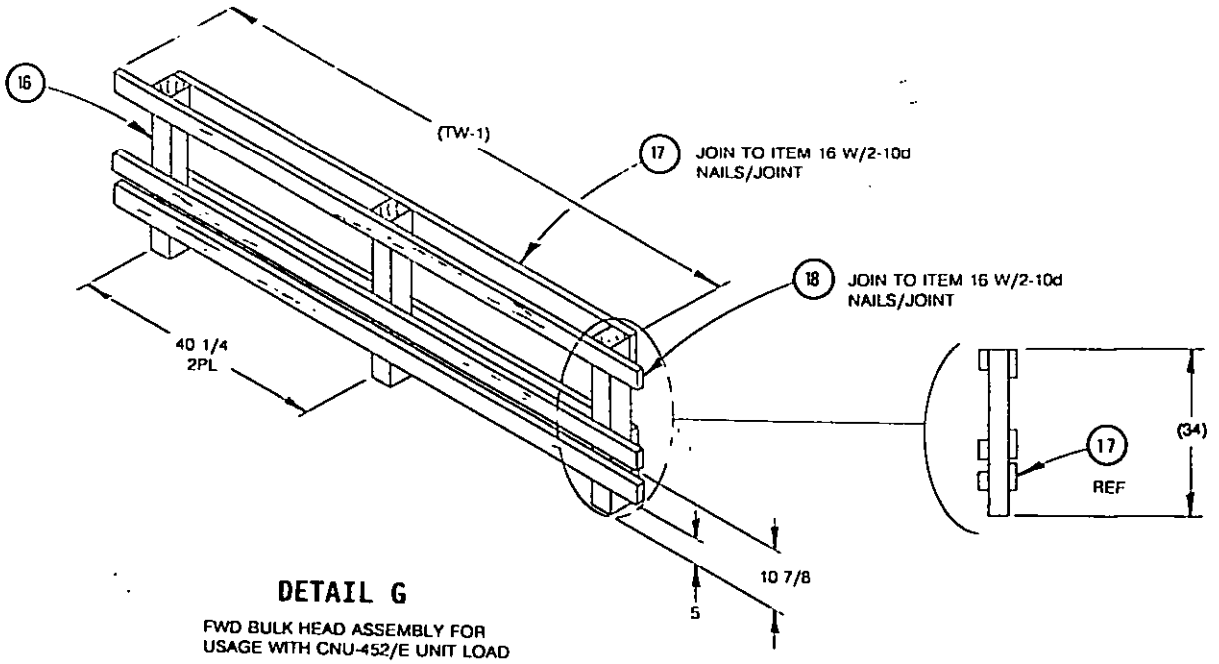

DETAIL G


FWD BULK HEAD ASSEMBLY FOR USAGE WITH CNU-452/E UNIT LOAD

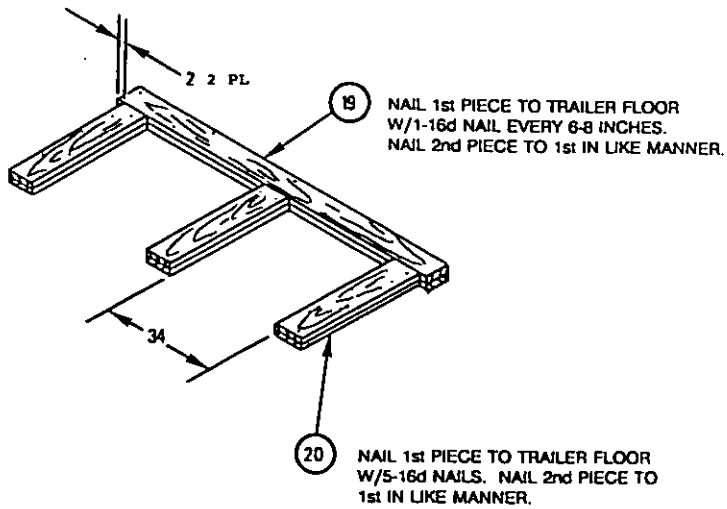

DETAIL H


REAR BLOCKING ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

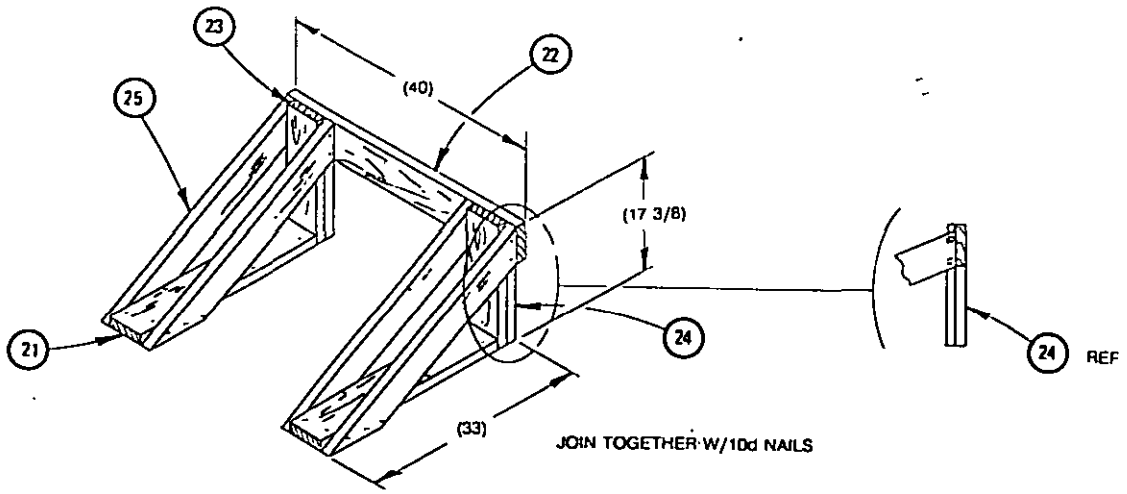

DETAIL J

K BRACE ASSEMBLY

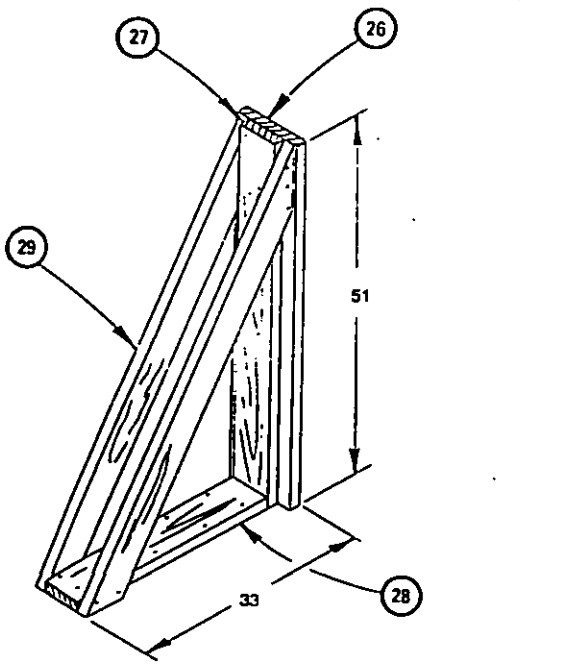


DETAIL K

K-BRACE ASSY K

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.


BLOCKING, BRACING, AND INTERFACING ARRANGEMENTS FOR VARIOUS MIXED LOADS

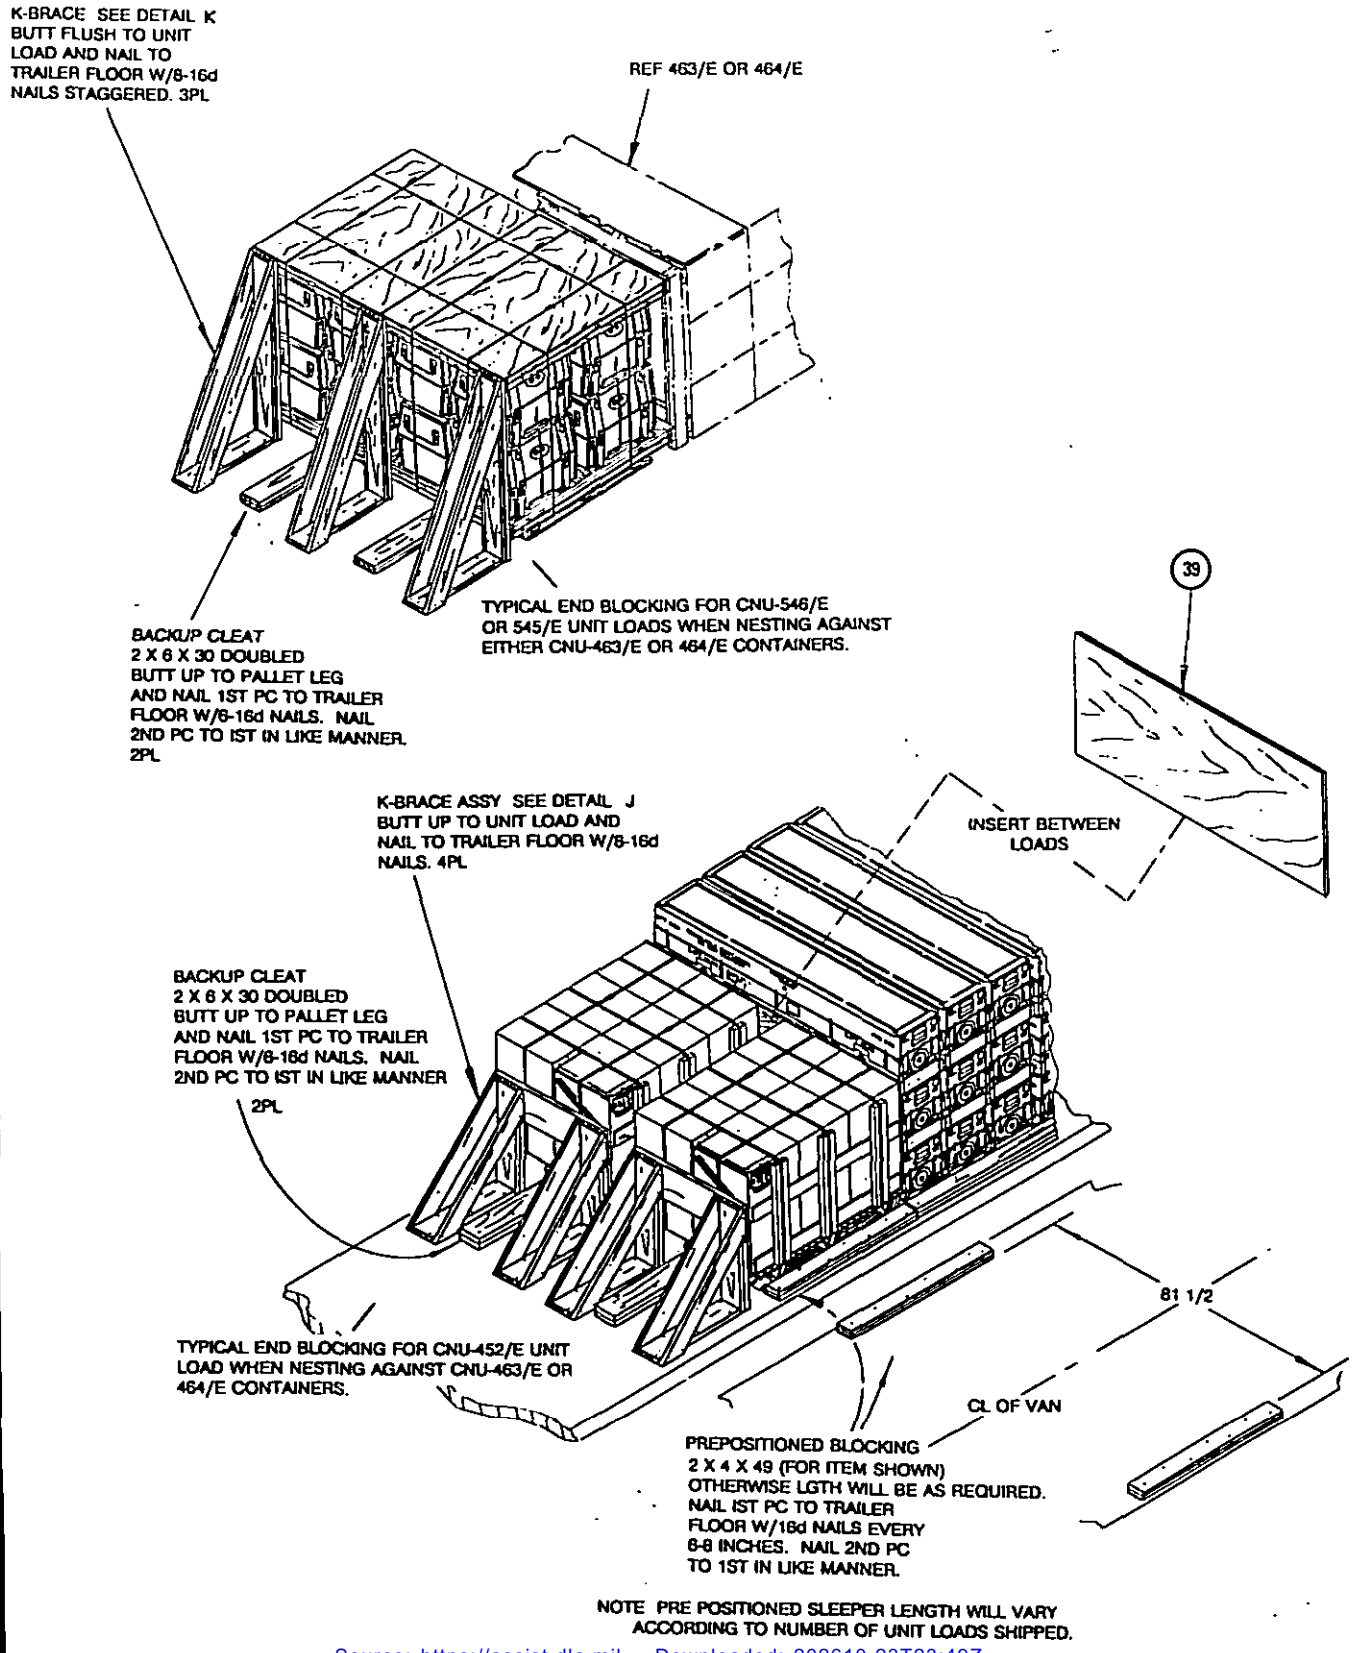

NOTE PRE POSITIONED SLEEPER LENGTH WILL VARY ACCORDING TO NUMBER OF UNIT LOADS SHIPPED.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

BLOCKING, BRACING, AND INTERFACING ARRANGEMENTS FOR VARIOUS MIXED LOADS

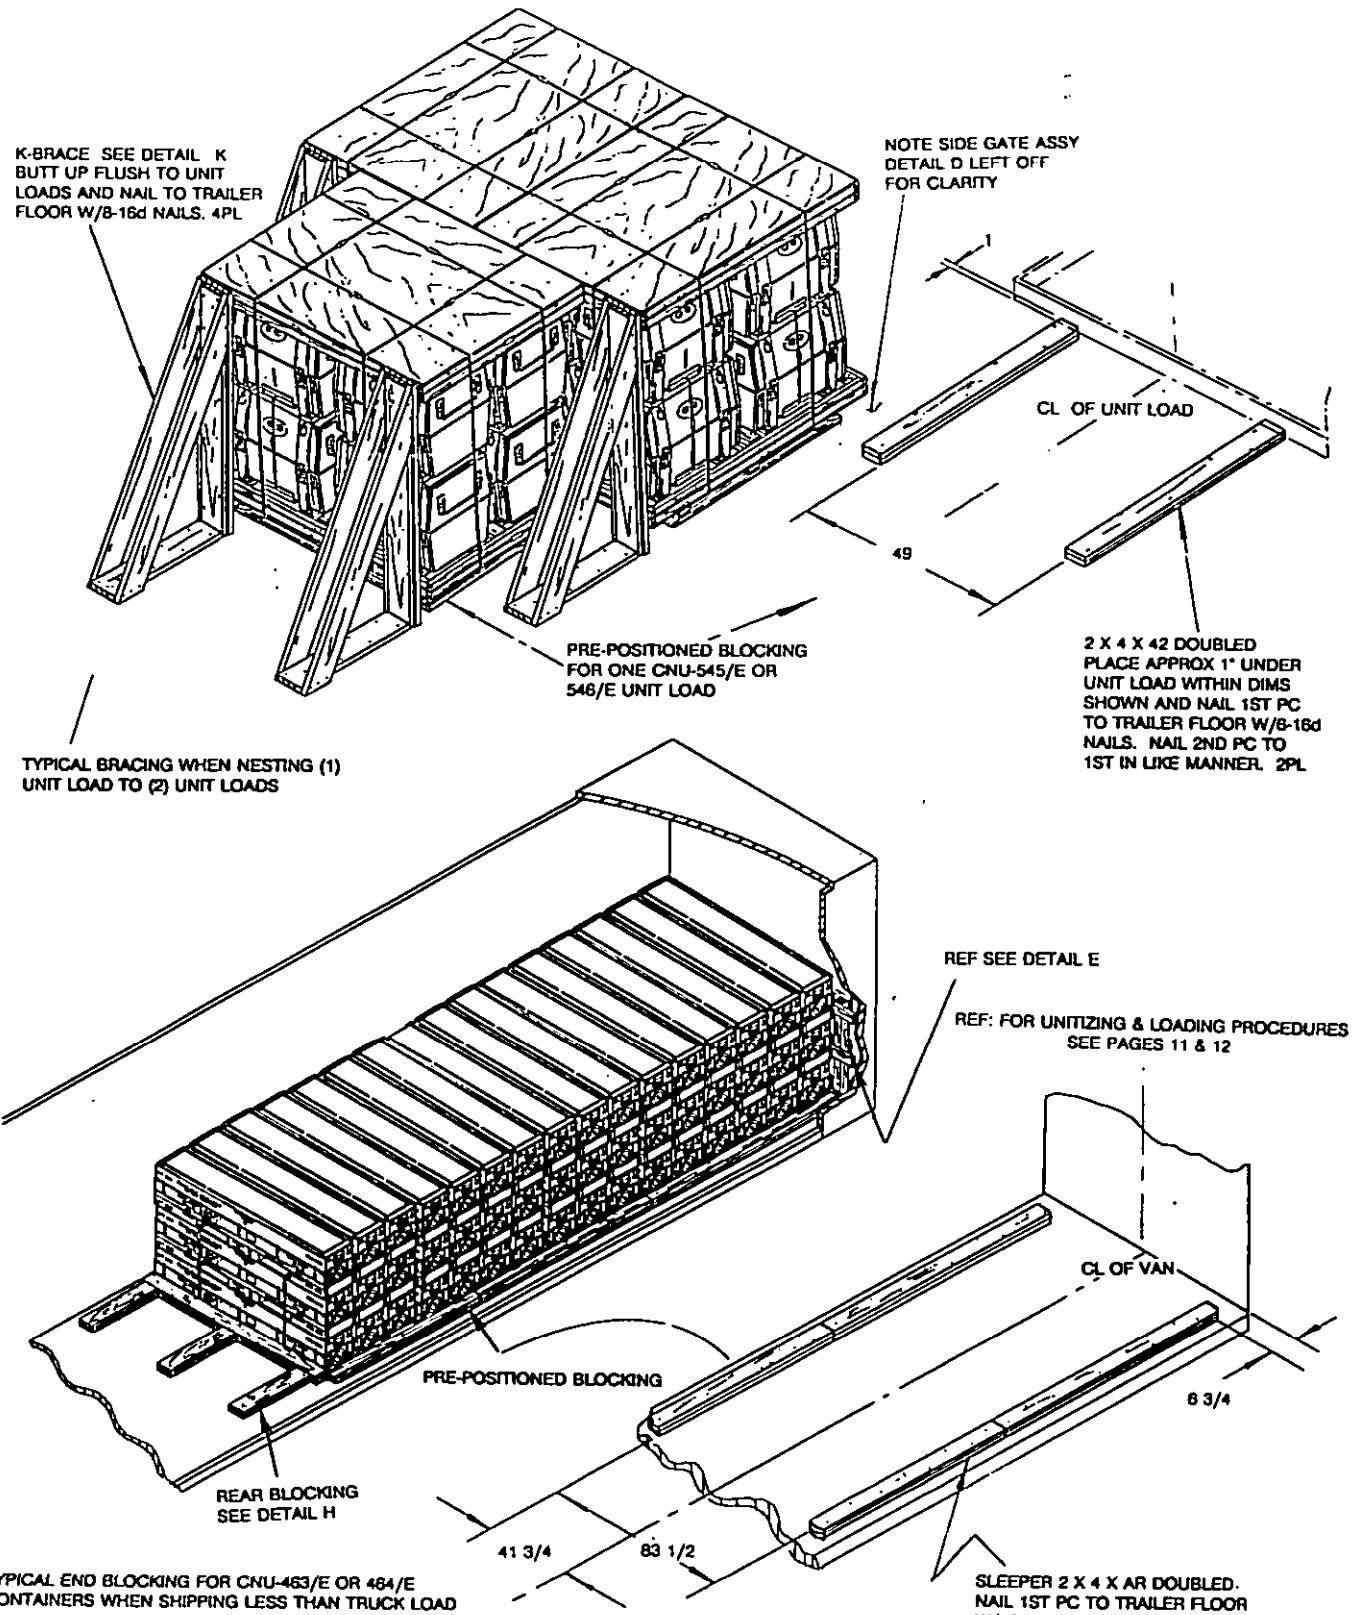


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49:42
Check the source to verify that this is the current version before use.

BLOCKING, BRACING, AND INTERFACING ARRANGEMENTS FOR VARIOUS MIXED LOADS

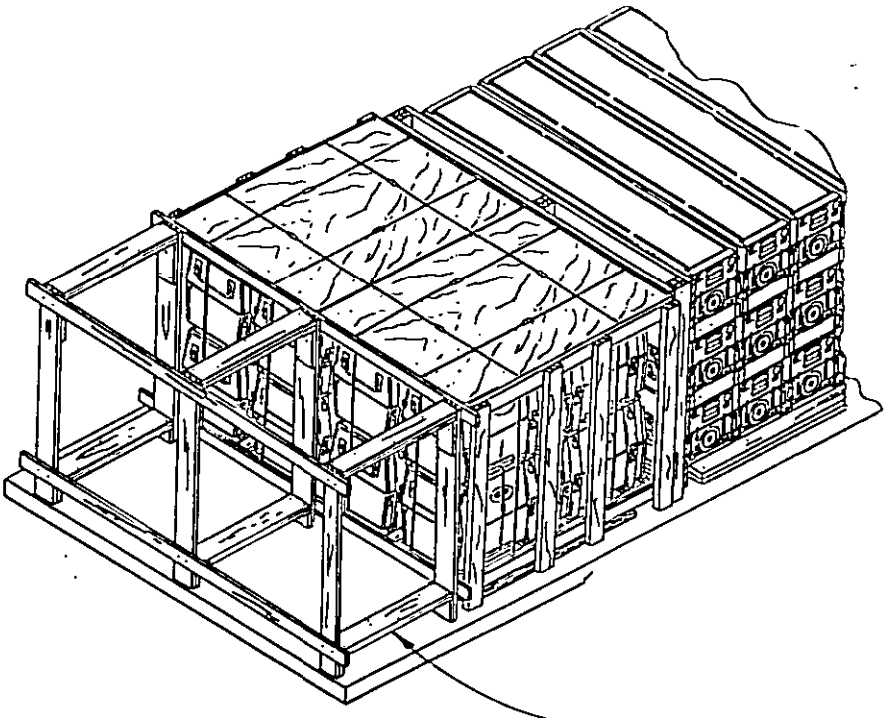

NOTE:
ITEM 32 CAN BE CUT TO ACCOMMODATE VARIOUS SPACES UP TO 36" BETWEEN LOAD AND REAR DOOR

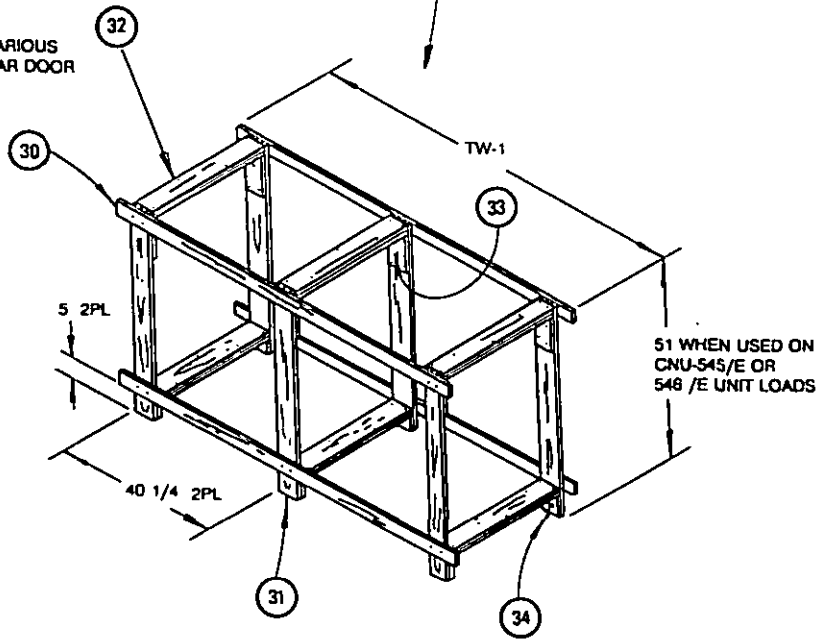

DETAIL L

REAR GATE ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURES:

2 CONTAINERS


1. USING A FORK LIFT TRUCK, STACK 2ND CONTAINER ON TOP OF 1ST. BE SURE TO ALIGN THE STACKING FEATURES.
2. POSITION TWO STRAPS, ITEM 35, THROUGH FORK POCKETS OF BOTH CONTAINERS AS SHOWN IN DETAIL M. TENSION AND DOUBLE NOTCH SEALS, ITEM 38.

3 CONTAINERS

1. USING A FORK LIFT TRUCK, STACK 2ND CONTAINER ON TOP OF 1ST AND 3RD CONTAINER ON TOP OF 2ND CONTAINER. BE SURE TO ALIGN THE STACKING FEATURES.
2. POSITION TWO STRAPS, ITEM 36, THROUGH FORK POCKETS OF TOP AND BOTTOM CONTAINER AS SHOWN IN DETAIL N. TENSION AND DOUBLE NOTCH SEALS, ITEM 38.


9 CONTAINERS

1. REPEAT STACKING FOR 3 CONTAINERS.
2. ALIGN 3 UNIT LOADS SIDE BY SIDE AS SHOWN IN DETAIL P.
3. POSITION TWO STRAPS, ITEM 37, THROUGH THE FORK POCKETS OF THE TOP AND BOTTOM LAYERS AS SHOWN IN DETAIL P. TENSION AND DOUBLE NOTCH SEALS, ITEM 38

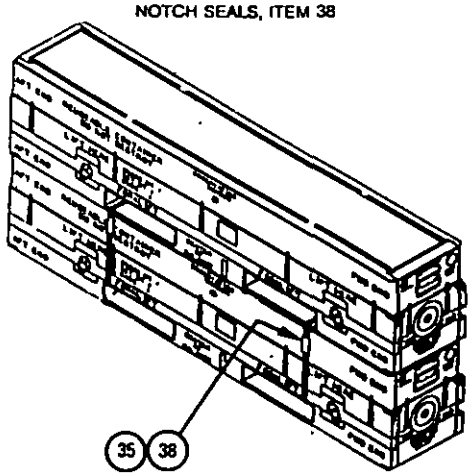

DETAIL M

2 CONTAINERS

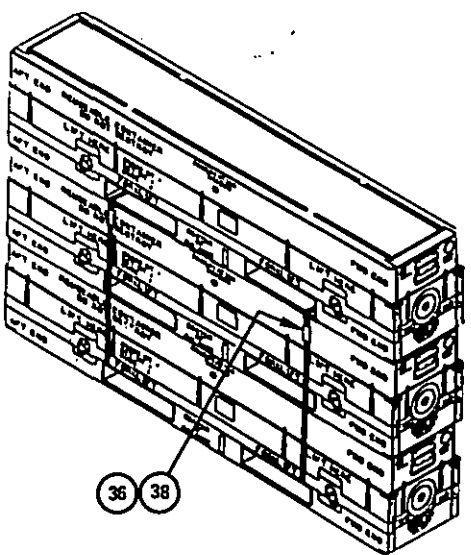

DETAIL N


3 CONTAINERS

DEUNITIZING PROCEDURE:

1. CUT AND REMOVE STRAPPING.
2. REMOVE CONTAINERS.

NOTE

THE STRAPPING TOGETHER OF CONTAINERS TO FORM A UNIT LOAD OF CONTAINERS TWO (2) OR THREE (3) HIGH IS AUTHORIZED FOR LOADING AND UNLOADING OF TRAILERS ONLY. ANY MOVEMENT OF THESE LOADS IS LIMITED TO THAT NECESSARY TO LOAD OR UNLOAD THE TRAILER.

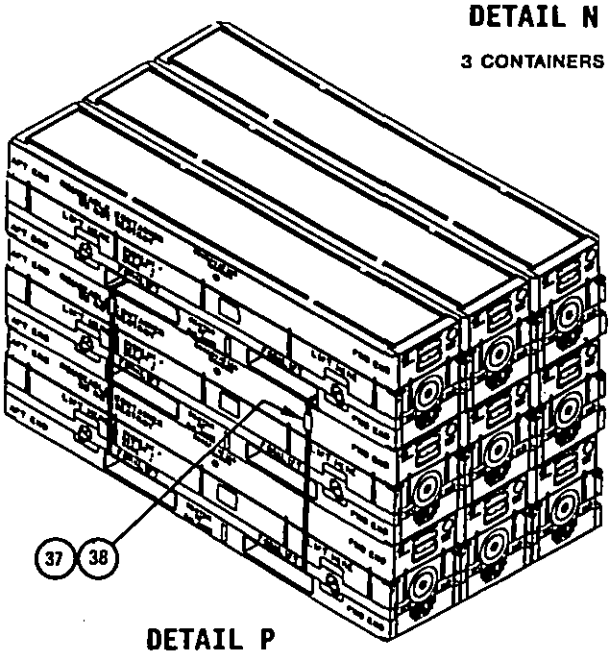

DETAIL P

9 CONTAINERS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

LTL- GUIDANCE & PROPULSION LOADING PROCEDURES


LTL NOTES:

1. THE LTL PLAN SHOWN BELOW IS THE LESS-THAN-TRUCKLOAD PLAN FOR THE QUANTITY OF CONTAINERS AND UNIT LOADS SHOWN. THIS DOES NOT LIMIT LTL SHIPMENTS TO THE QUANTITIES SHOWN SINCE LTL SHIPMENTS MAY CONSIST OF A LESSER OR GREATER NUMBER OF EACH ITEM.

2. BEFORE LOADING THE GUIDANCE AND PROPULSION CONTAINERS, CREATE AS MANY 9-CONTAINER UNIT LOADS (SEE DETAIL P) AS POSSIBLE. WITH THE REMAINING CONTAINERS, CREATE AS MANY 3-CONTAINER UNIT LOADS (SEE DETAIL N) AS POSSIBLE. IF TWO CONTAINERS REMAIN, UNITIZE ACCORDING TO DETAIL M.

3. IF POSSIBLE, AVOID UNITIZING GUIDANCE AND PROPULSION CONTAINERS TOGETHER. IF THIS MUST BE DONE, POSITION PROPULSION CONTAINERS ON THE BOTTOM.

4. IF IT'S NECESSARY TO LOAD A SINGLE CONTAINER IT SHOULD BE LOADED BEHIND THE 3 AND 9 PACK UNIT LOADS. 2-CONTAINER UNIT LOADS CAN BE LOADED BETWEEN OR BEHIND 3 AND 9 PACK UNIT LOADS.

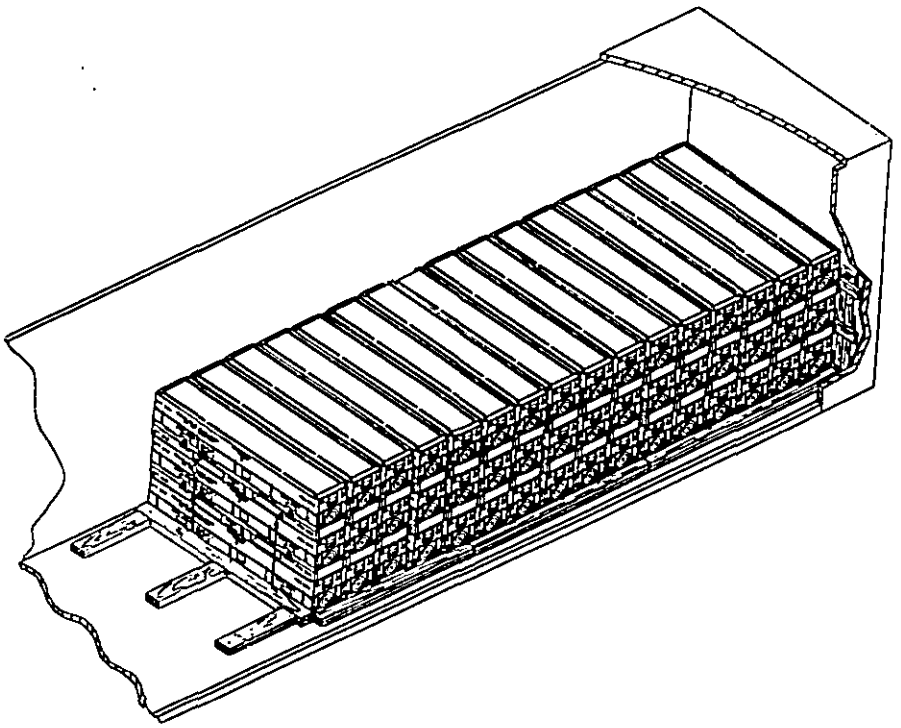

Source: https://assist.dla.mil -- Downloaded: 20261O-23T23:49Z
Check the source to verify that this is the current version before use.

REQ	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
1	39	SPACER	PLYWOOD	1/2 X 34 X 81
AR	38	SEALS	STEEL	FOR 1 1/4 STRAPPING
2	37	STRAPPING	STEEL	1 1/4 X .035 X 14.5FT
2	36	STRAPPING (DETAIL N)	STEEL	1 1/4 X .035 X 9FT
2	35	STRAPPING (DETAIL M)	STEEL	1 1/4 X .035 X 6FT
6	34	STRUT SUPPORT BOTTOM	DETAIL L	2 X 6 X 6
6	33	STRUT SUPPORT TOP		2 X 6 X 12
12	32	STRUT		2 X 6 X AR
6	31	VERTICAL		2 X 6 X 50 3/4
4	30	HORIZONTAL	DETAIL L	2 X 4 X AR
2	29	STRUT	DETAIL K	2 X 6 X AR
1	28	BASE		2 X 6 X 30
1	27	VERTICAL		2 X 6 X 50 3/4
1	26	VERTICAL	DETAIL K	2 X 10 X 50 3/4
4	25	STRUT	DETAIL J	2 X 6 X AR
2	24	SUPPORT		2 X 6 X 11 7/8
2	23	VERTICAL		2 X 6 X 17 3/8
1	22	HORIZONTAL		2 X 6 X 40
2	21	BASE	DETAIL J	2 X 6 X 30
6	20	BACK-UP CLEAT	DETAIL H	2 X 6 X 30
2	19	CROSSMEMBER	DETAIL H	2 X 6 X 86
3	18	HORIZONTAL	DETAIL G	2 X 4 TW-1
3	17	HORIZONTAL-FWD		2 X 6 X 84
3	16	VERTICAL	DETAIL G	4 X 4 X 34
3	15	HORIZONTAL	DETAIL F	2 X 4 X TW-1
3	14	HORIZONTAL - FWD		2 X 6 X 86
3	13	VERTICAL SUPPORT	DETAIL F	4 X 4 X 51
3	12	HORIZONTAL SUPPORT	DETAIL E	2 X 6 X 82
3	11	HORIZONTAL SUPPORT		2 X 4 X TW-1
3	10	VERTICAL BRACE	DETAIL E	4 X 4 X 39 1/2
2	9	HORIZONTAL BRACE	DETAIL D	1 X 4 58 1/2
4	8	VERTICAL BRACE	DETAIL D	2 X 4 X 50 3/4
4	7	HORIZONTAL BRACE	DETAIL C	2 X 6 X 86
6	6	VERTICAL BRACE	DETAIL C	2 X 4 X 54
6	5	HORIZONTAL BRACE	DETAIL B	2 X 6 X 86
6	4	VERTICAL BRACE	DETAIL B	2 X 4 X 50 3/4
6	3	STRUT	DETAIL A	2 X 6 X AR
6	2	BASE SUPPORT		2 X 4 X AR
2	1	HORIZONTAL	DETAIL A	2 X 6 X TW-1

LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.