MILITARY STANDARD

MIL-STD-1325 (1)
(NAVY)


RAILCAR LOADING

MINE, UNDERWATER, MK 55 AND MODS, CONFIGURATION "B" "C" AND "D" IN CRATE MK 55 MOD 1

10 JANUARY 1963
SUPERSEDING WR-527
15 JANUARY 1958

UNIT LOAD DATA

UNIT LOAD DRAWING — MIL-STD-1325/14
WEIGHT — SEE TABLES
DIMENSIONS — 84 L X 38 3/4 W X 73 1/2 H
CUBE — 45.4 CU FT
DOT HAZARD CLASSIFICATION — EXPLOSIVES A

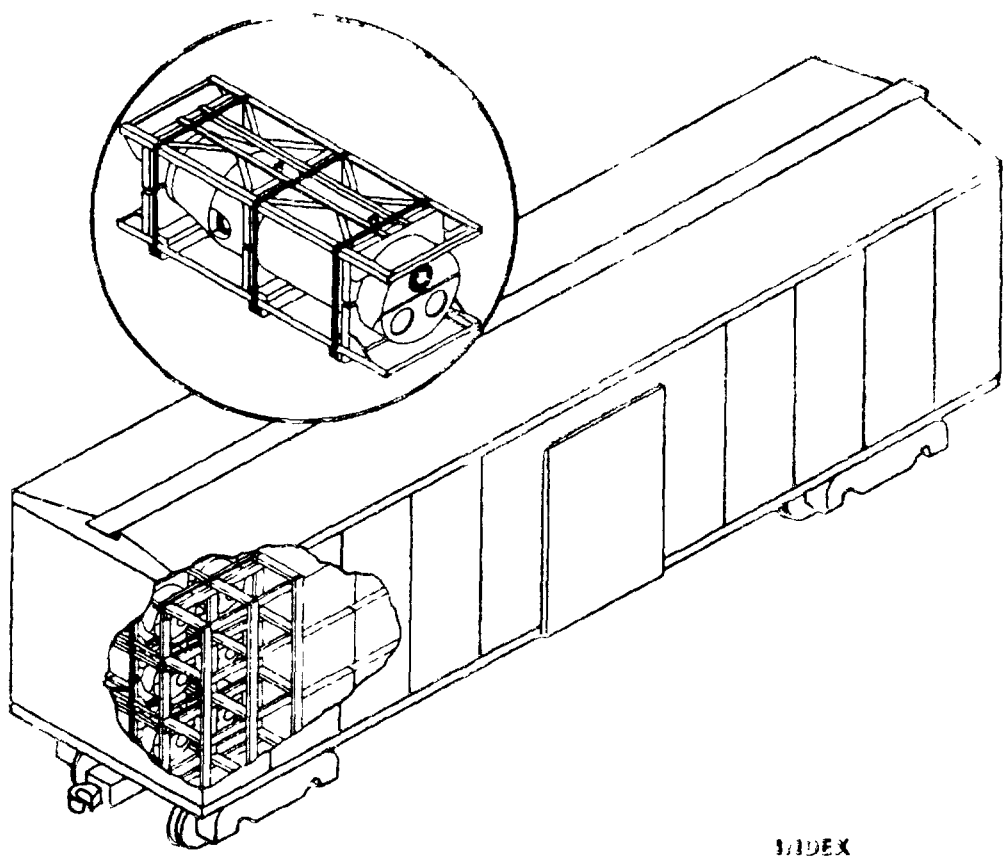

INDEX

ITEM	PAGE
GENERAL NOTES	3
40'6" CL RROAD, COMB	2, 3&4
50'6" CL ROAD, COMB	5, 6&7

NOTES
1 UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2 FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, TRUCK-LOADING AND CONTAINERLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS MIL-HDBK-236 (NAVY)

FSC 8 3

AUTHORIZED AND RELEASED FOR GENERAL USE

SIGNATURE TECHNICAL DIRECTION AGENT (TDA) — DATE 11/30/62

SIGNATURE SEA SYSTEMS DIRECTORATE — DATE 12/2/62

APPROVED BY BUREAU OF EXPLOSIVES

SIGNATURE — DATE

ORIGINATOR — DATE 11/30/62

NAVAL WEAPONS HANDLING CENTER
EARLE, NEW JERSEY

PAGE 1 OF 7

Downloaded: 2026-10-24 from https://assist.dla.mil/
Check the source to verify that this is the current version before use.

GENERAL NOTES

1 FOR GENERAL INFORMATION CONCERNING ORDERING, INSPECTING, AND PREPARING CARS AND FOR DUNNAGING MATERIALS, DESIGN, AND INSTALLATION OF DUNNAGE SEE THE GENERAL DOCUMENT MIL-STD-1325 (NAVY) "RAILCAR LOADING OF HAZARDOUS MATERIALS"

2 WHEN PLANNING SHIPMENTS ORDER THE MINIMUM NUMBER OF CARS OF THE CAPACITY REQUIRED FOR THE SHIPMENT

3 LOADING PLANS SHOWN ARE FOR COMMERCIAL BOXCARS WITH 40 FT 6 INCHES INSIDE LENGTH, 110 INCHES INSIDE WIDTH AND COMMERCIAL BOXCARS WITH 50 FT 6 INCHES INSIDE LENGTH, 110 INCHES INSIDE WIDTH

4 THE "LOAD LIMIT" OF A CAR MUST NOT BE EXCEEDED NOR SHOULD THE RAILCAR BE LOADED SO THAT MORE THAN ONE-HALF OF THE "LOAD LIMIT" IS CARRIED BY ONE SET OF TRUCKS

5 IF END WALLS OF CARS ARE NOT SQUARE THEY MUST BE SQUARED OFF BEFORE STARTING TO LOAD CAR

6 THE LOAD CONSISTS OF UNDERWATER MINES MK 55 AND MODS IN UNDERWATER MINE CRATE MK 55 MOD 1, WITH SKIDS ATTACHED IN ACCORDANCE WITH DOMESTIC UNIT LOAD MIL-STD-1322-714

7 THE UNIT LOADS ARE HANDLED AND LOADED WITH A SUITABLE FORK LIFT TRUCK

8 UNLESS OTHERWISE SPECIFIED NAILING SHALL BE IN ACCORDANCE WITH MIL-STD-1325 (NAVY)

9 ALL STRAP JOINTS SHALL BE CRIMP-TYPE JOINTS MADE WITH A CRIMPING TOOL THAT DOES NOT CUT THE SEAL OR STRAP, RATHER THAN A TOOL THAT MAKES A NOTCH-TYPE JOINT THE STRAPPING MUST BE IN ACCORDANCE WITH NAVSUP NOTICE 4642 DATED 21 APRIL 1971

10 APPLICABLE MATERIAL SPECIFICATIONS:
DUNNAGE LUMBER - FED SPEC MM-L-751
NAILS - FED SPEC FF-N-105
STRAPPING -FED SPEC QQ-S-781, TYPE I HEAVY DUTY, FINISH A, B, OR C
SEALS - FED SPEC QQ-S-781 STYLE II, HEAVY DUTY

11 AFTER BLOCKING AND BRACING HAS BEEN INSPECTED ATTACH SHIPPING DOCUMENTS INSIDE THE CAR IN AN ACCESSIBLE AREA, CLOSE AND SEAL BOXCAR DOORS, AND ATTACH APPLICABLE PLACARDS TO THE OUTSIDE OF CAR AS PRESCRIBED IN OP 2165 (VOL I)

40 FT. 6 IN BOXCAR, COMMERCIAL

1 THE CARLOAD CONSISTS OF 42 UNIT LOADS WHICH MUST BE LOADED AND DUNNAGED IN ACCORDANCE WITH THIS PROCEDURAL DRAWING

2 WHEN LESS THAN CARLOAD (LCL) QUANTITIES ARE REQUIRED TO BE SHIPPED IN COMMERCIAL BOXCARS AND A PARTIAL LAYER RESULTS, THE PARTIAL LAYER OF LADING SHALL BE BRACED BY MEANS OF END BRACING AND/OR PARTIAL LAYER BRACING CONSTRUCTED IN ACCORDANCE WITH MIL-STD-1325-100 (NAVY) OR PARTIAL UPPER LAYER BRACING IN ACCORDANCE WITH MIL-STD-1325-102 (NAVY)
SELECT THE TYPE OF BRACE TO COMPLY WITH THE WEIGHT OF THE UNITS TO BE RETAINED THE WEIGHT DISTRIBUTION REQUIREMENTS OF THE AAR MUST BE COMPLIED WITH, SEE MIL-STD-1325 (NAVY).


3 THE LOADS AS SHOWN ARE BASED ON CARS WHICH HAVE 6 FT WIDE DOORWAY OPENINGS AND ARE EQUIPPED WITH CONVENTIONAL SLIDING TYPE DOORS THE DEPICTED PROCEDURES AND METHODS OF BLOCKING ARE APPLICABLE TO BOXCARS EQUIPPED WITH CONVENTIONAL SLIDING TYPE DOORS OTHER THAN 6 FT WIDE

TABLE I


DODIC/ NALC NO.	MINE MK 55 MOD	CONFIG-URATION	GROSS WEIGHT (APPROX.) LBS	
			CRATED MINE	CAR LOAD*
U875	1	B	2185	94,134
U876	1	C	2163	93,210
U877	1	D	2155	92,874
U887	2	B	2263	97,410
U888	2	C	2229	95,982
U889	2	D	2221	95,646
U899	3	B	2276	97,956
U900	3	C	2239	96,402
U901	3	D	2231	96 066
U911	4	B	2168	93,420
U912	4	C	2160	93,084
U913	4	D	2135	92,034
U923	5	B	2422	104,088
U924	5	C	2236	96,276
U925	5	D	2232	96,108
U929	6	B	2380	102,324
U930	6	C	2247	96,738
U931	6	D	2232	96,108
U935	7	B	2325	100,014
U936	7	C	2285	99,594
U937	7	D	2285	98,334

* ESTIMATED WEIGHT OF DUNNAGE (2364 LBS)
INCLUDED IN CARLOAD WEIGHT. DO NOT USE FOR SHIPPING PURPOSES


Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

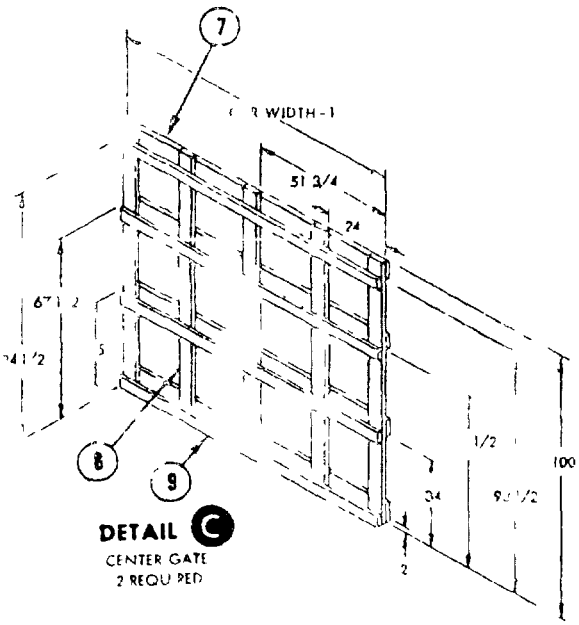


DETAIL C
CENTER GATE
2 REQUIRED

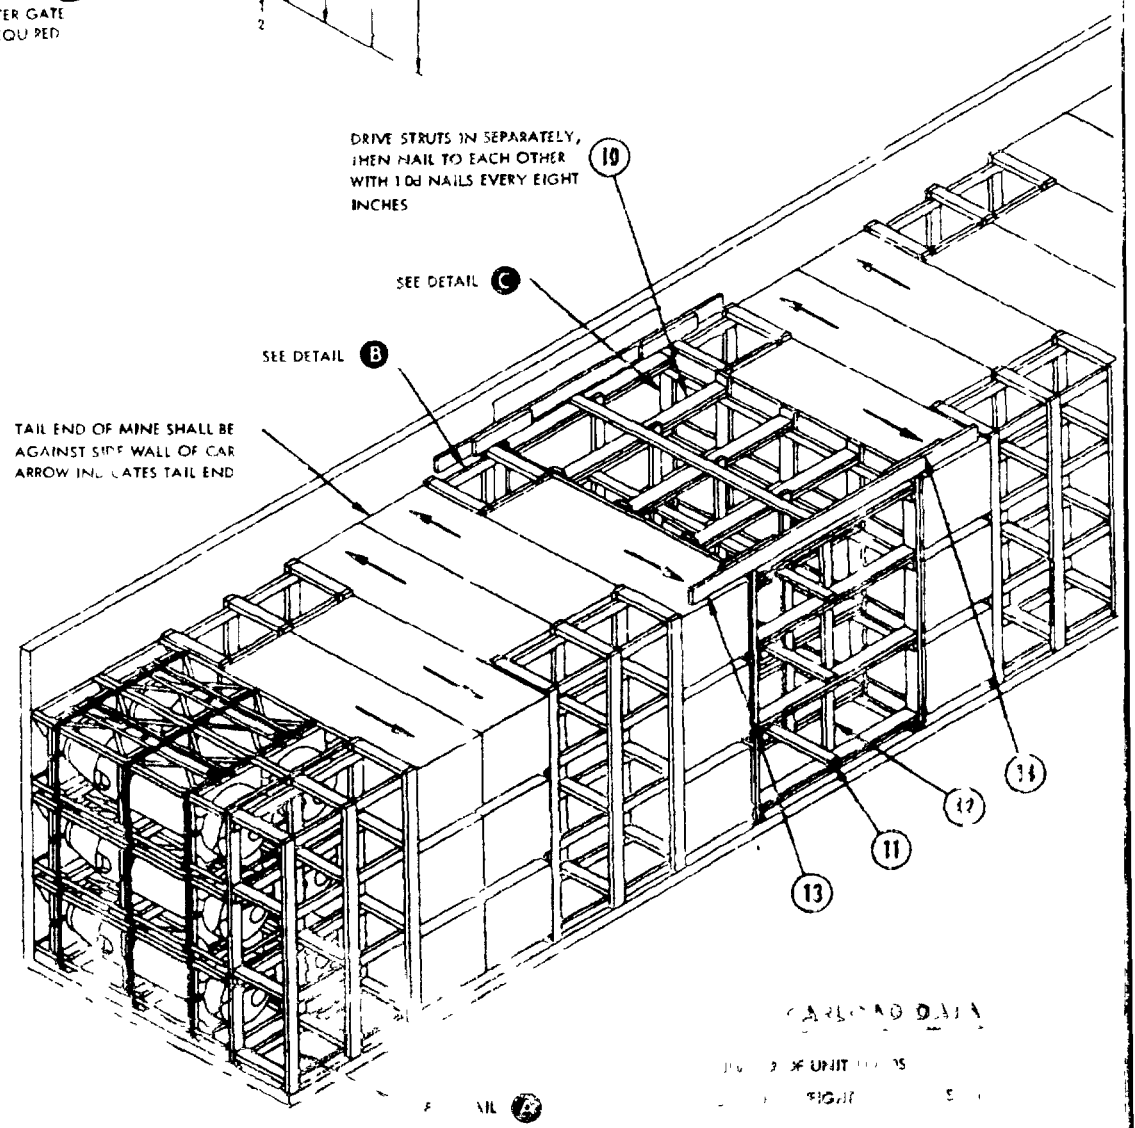


Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

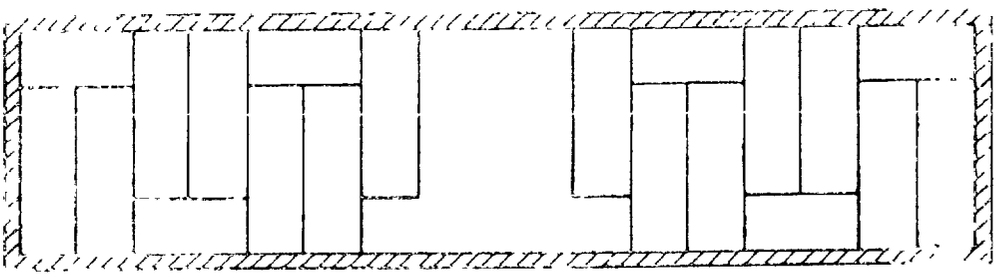

LOADING PLAN

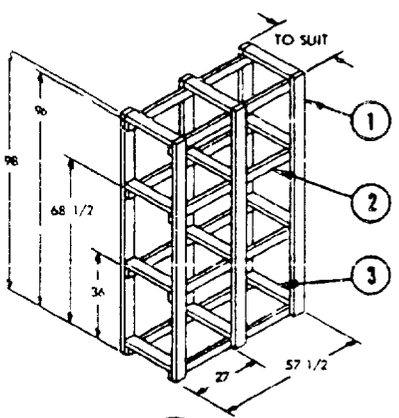

DETAIL A
SWAY BRACE
6 REQUIRED

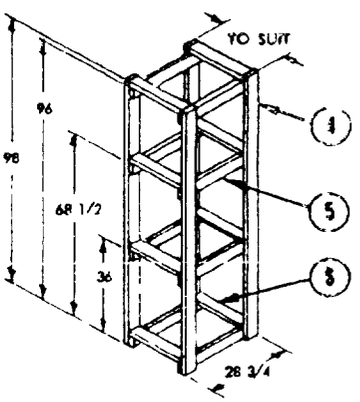

DETAIL B
SWAY BRACE
2REQUIRED

PIECE NO	DESCRIPTION	SIZE	NO PCS EACH	NAIL TO	NAILS NUMBER	NAILS SIZE
14	GATE HOLDDOWN CLEAT	2 x 6 x 24	4	13	5	12d
13	GATE HOLDDOWN	2 x 6 x DOOR WIDTH + 48	2	CAR WALL	5/END	12d
12	VERTICAL TIE BAR	2 x 4 x 98	5	10	3/JOINT	12d
11	HORIZONTAL TIE BAR	2 x 4 x CAR WIDTH -1	4	10	3/JOINT	12d
10	STRUT	2 x 6 x WEDGE FIT	30	8	2/JOINT	12d
9	STRUT CLEAT	2 x 4 x CAR WIDTH -1	8	9	3/JOINT	12d
8	CENTER GATE VERTICAL	2 x 6 x 100	10	SEE 7	-	-
7	CENTER GATE HORIZONTAL	2 x 6 x CAR WIDTH -1	8	8	3/JOINT	12d
6	ANTI-SWAY BRACE	2 x 4 x TO SUIT	16	5	2/JOINT	12d
5	SWAY BRACE HORIZONTAL	2 x 4 x 28 3/4	16	SEE 4	-	-
4	SWAY BRACE VERTICAL	2 x 4 x 98	8	3	3/JOINT	12d
3	ANTI-SWAY BRACE	2 x 4 x TO SUIT	12	2	2/JOINT	12d
2	SWAY BRACE HORIZONTAL	2 x 4 x 57 1/2	48	SEE 1	-	-
1	SWAY BRACE VERTICAL	2 x 4 x 98	36	2	3/JOINT	12d

LIST OF MATERIALS AND DETAILS

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.


50 FT. 6 IN BOXCAR, COMMERCIAL

1 THE CARLOAD CONSISTS OF 54 UNIT LOADS WHICH MUST BE LOADED AND DUNNAGED IN ACCORDANCE WITH THIS PROCEDURAL DRAWING


2 WHEN LESS THAN CARLOAD (LCL) QUANTITIES ARE REQUIRED TO BE SHIPPED IN COMMERCIAL BOXCARS AND A PARTIAL LAYER RESULTS, THE PARTIAL LAYER OF LADING SHALL BE BRACED BY MEANS OF END BRACING AND/OR PARTIAL LAYER BRACING CONSTRUCTED IN ACCORDANCE WITH MIL-STD-1325-100 (NAVY) OR PARTIAL UPPER LAYER BRACING IN ACCORDANCE WITH MIL-STD-1325-102 (NAVY) SELECT THE TYPE OF BRACE TO COMPLY WITH THE WEIGHT OF THE UNITS TO BE RETAINED THE WEIGHT DISTRIBUTION REQUIREMENTS OF THE AAR MUST BE COMPLIED WITH, SEE MIL-STD-1325 (NAVY)

3 THE LOADS AS SHOWN ARE BASED ON CARS WHICH HAVE 10 FT WIDE DOORWAY OPENINGS AND ARE EQUIPPED WITH CONVENTIONAL SLIDING TYPE DOORS THE DEPICTED PROCEDURES AND METHODS OF BLOCKING ARE APPLICABLE TO BOXCARS EQUIPPED WITH CONVENTIONAL SLIDING TYPE DOORS OTHER THAN 10 FT WIDE

4 THE DEPICTED PROCEDURES AND METHODS OF BLOCKING ARE ALSO APPLICABLE TO BOXCARS EQUIPPED WITH PLUG DOORS PROVIDING STACKS WITH MORE THAN HALF OF THE UNIT LOAD IN THE DOORWAY AREA ARE UNITIZED WITH TWO LATERALLY APPLIED 1 1/4 " STEEL STRAPS PER STACK EACH TENSIONED AND SEALED WITH TWO DOUBLE CRIMPED SEALS OR, AS AN ALTERNATE, EACH PLUG DOOR MAY BE SPANNED WITH FOUR 2 x 6 MEMBERS LOCATED AT THE SAME HEIGHTS AS THE CENTER GATE HORIZONTALS AND NAILED TO THE SIDE WALLS WITH FIVE 10d NAILS EACH END DUNNAGE MATERIAL MUST NOT BE NAILED TO ANY PLUG DOOR WHETHER MAIN OR AUXILLARY, EXCEPT WHEN THE CAR HAS A COMBINATION OF A CONVENTIONAL SLIDING TYPE DOOR AND A PLUG TYPE DOOR AND AN ADEQUATE NAILING STRIP IS PROVIDED ON THE PLUG TYPE DOOR IF LUMBER OF SUFFICIENT LENGTH TO SPAN PLUG DOORS IS NOT AVAILABLE RANDOM LENGTH MATERIAL, DOUBLED AND SPLICED BUT WITH JOINTS OF SPLICES OFFSET, MAY BE USED DIMENSIONAL LUMBER DOORWAY PROTECTION, PIECES 15 AND 16 IS NOT REQUIRED WHEN PLUG DOOR EQUIPPED BOXCARS ARE USED EXCEPT WHEN CAR HAS A COMBINATION OF PLUG DOOR AND CONVENTIONAL SLIDING DOOR, THEN DIMENSIONAL LUMBER DOORWAY PROTECTION IS REQUIRED FOR THE CONVENTIONAL DOOR PLUG DOORS MUST BE SECURELY CLOSED AND WIRED TOGETHER WITH A STRONG FLEXIBLE STEEL WIRE INSERTED THROUGH THE HOLES IN THE DOOR LATCH ASSEMBLY ONE OR MORE TIMES AND THE WIRE ENDS TWISTED TOGETHER

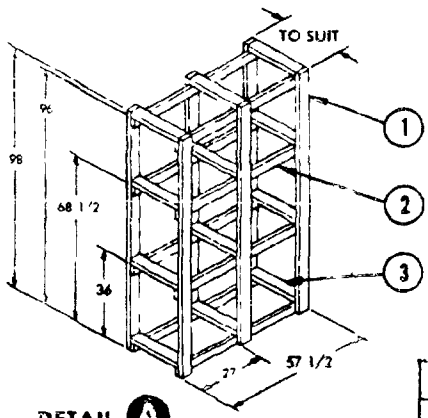

DETAIL A
SWAY BRACE
8 REQUIRED

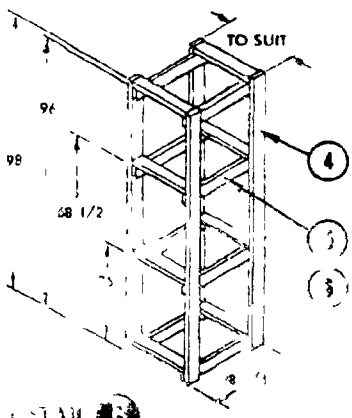



DETAIL B
SWAY BRACE
2 REQUIRED


PIECE NO	DESCRIPTION	SIZE	NO PCS REQ'D	NAIL TO	NAILS NUMBER	NAILS SIZE
16	HORTZ, DOORWAY PROTECTION MEMBER	2 x 4 x DOOR WIDTH	12	15	3/JOINT	12d
15	VERTICAL DOORWAY PROTECTION MEMBER	2 x 3 x 100	4	DOOR POST	2/FT	20d
14	GATE HOLDDOWN CLEAT	2 x 6 x 24	4	13	5	12d
13	GATE HOLDDOWN	2 x 6 x DOOR WIDTH + 48	2	CAR WALL	5/END	12d
12	VERTICAL TIE BAR	2 x 4 x 98	5	10	3/JOINT	12d
11	HORIZONTAL TIE BAR	2 x 4 x CAR WIDTH -1	4	10	3/JOINT	12d
10	STRUT	2 x 6 x WEDGE FIT	40	8	2/JOINT	12d
9	STRUT CLEAT	2 x 4 x CAR WIDTH -1	8	8	3/JOINT	12d
8	CENTER GATE VERTICAL	2 x 6 x 100	10	SEE 7	-	-
7	CENTER GATE HORIZONTAL	2 x 6 x CAR WIDTH -1	8	8	3/JOINT	12d
6	ANTI - SWAY BRACE	2 x 4 x to suit	16	5	2/JOINT	12d
5	SWAY BRACE HORIZONTAL	2 x 4 x 28 3/4	16	SEE 4	-	-
4	SWAY BRACE VERTICAL	2 x 4 x 98	8	5	3/JOINT	12d
3	ANTI-SWAY BRACE	2 x 4 x TO SUIT	96	2	2/JOINT	12d
2	SWAY BRACE HORIZONTAL	2 x 4 x 57 1/2	64	SEE 1	-	-
1	SWAY BRACE VERTICAL	2 x 4 x 98	48	2	3/JOINT	12d

LIST OF MATERIALS AND NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

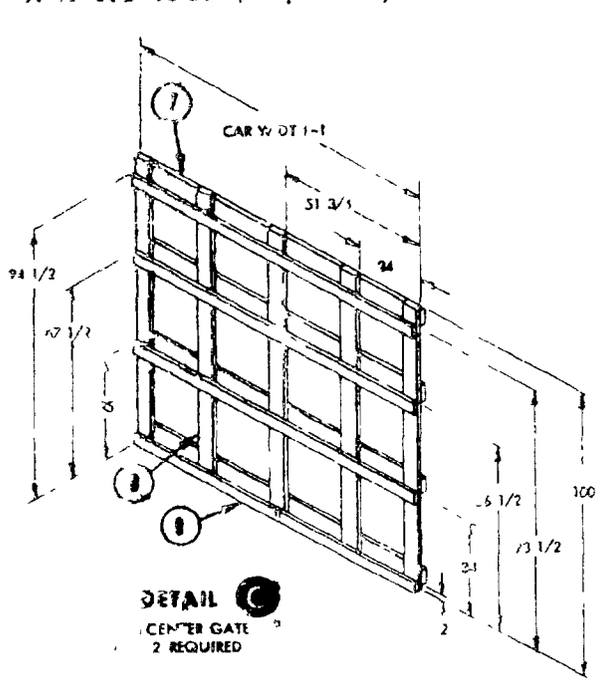


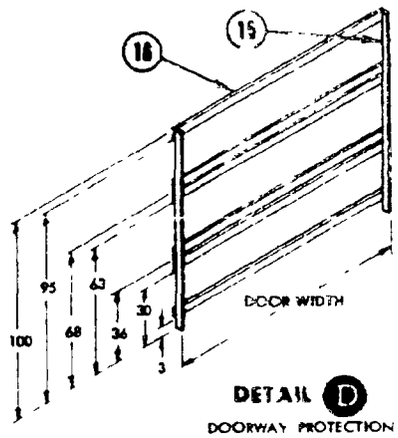

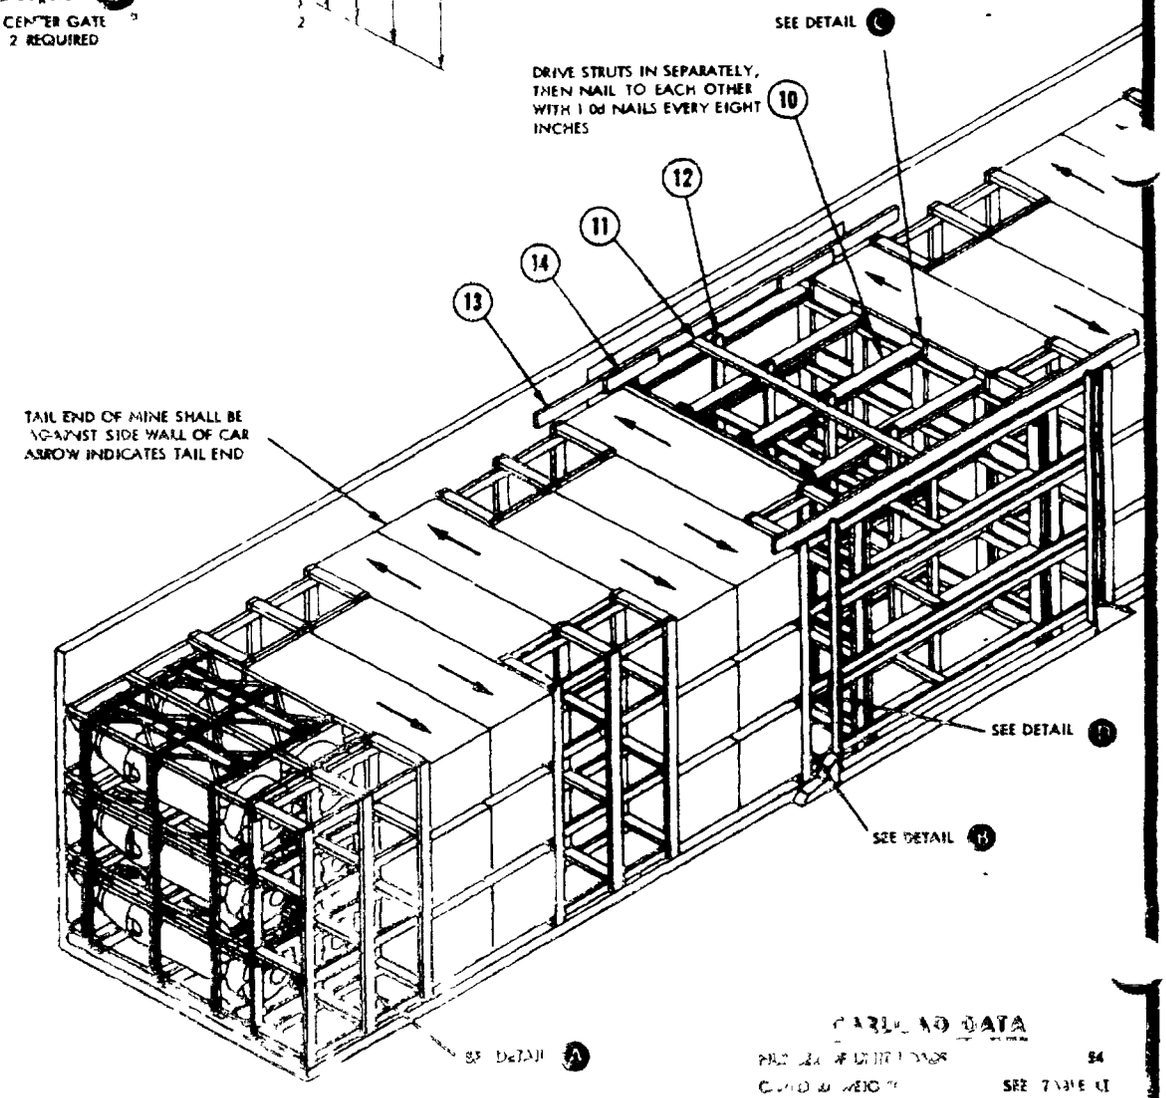

CARLOAD DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

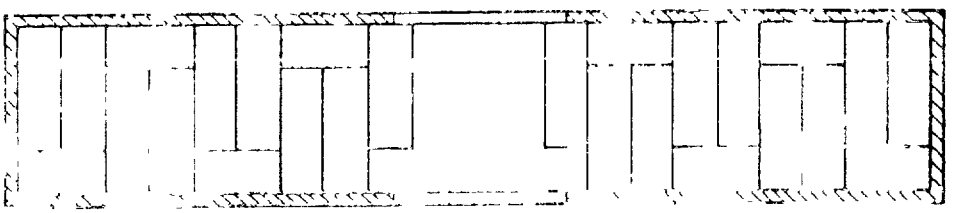

LOADING PLAN

TABLE II

DODIC/ NALC NO	MINE MK 51 MOD	CONFIG-URATION	GROSS WEIGHT (APPROX) LBS	
			CRATED MINE	CAR LOAD *
U875	1	B	2185	121 090
U876	1	C	2163	119 902
U877	1	D	2155	119,470
U887	2	B	2263	125,302
U888	2	C	2229	123,466
U889	2	D	2221	123 034
U899	3	B	2276	126 004
U900	3	C	2239	124,006
U901	3	D	2231	123 574
U911	4	B	2168	120,172
U912	4	C	2160	119,740
U913	4	D	2135	118 390
U923	5	B	2472	133,888
U924	5	C	2236	123,844
U925	5	D	2232	123 628
U929	6	B	2380	131,620
U930	6	C	2247	124,438
U931	6	D	2232	123,628
U935	7	B	2325	78,650
U936	7	C	2315	78 310
U937	7	D	2285	126, 190

* [illegible] OF DUNNAGE (30 LBS) INCLUDED IN [illegible], DO NOT USE FOR SHIPPING PURPOSES

REVISED [illegible]

MIL [illegible]

NAVY - OS

[illegible]

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

[illegible] purpose of this letter, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgment will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDING OFFICER
NAVAL WEAPONS STATION
[illegible]

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions -- Reverse Side)

1. DOCUMENT NUMBER

2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION

4. TYPE OF ORGANIZATION *(Mark one)*

- [ ] VENDOR
- [ ] USER
- [ ] MANUFACTURER
- [ ] OTHER *(Specify)* _____

3b. ADDRESS *(Street, City, State, ZIP Code)*

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI) -- Optional*

7b. TELEPHONE NUMBER *(Include Area Code) -- Optional*

7c. MAILING ADDRESS *(Street, City, State, ZIP Code) -- Optional*

8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.