MILITARY STANDARD

ELECTRICAL CONNECTORS, PLUG-IN SOCKETS AND ASSOCIATED HARDWARE, SELECTION AND USE OF

TO ALL HOLDERS OF MIL-STD-1353B:

1. THE FOLLOWING PAGES OF MIL-STD-1353B ARE NEW OR HAVE BEEN REVISED AND SUPERSEDE THE PAGES LISTED:

NEW PAGE	DATE	SUPERSEDED PAGE	DATE
101.57	20 February 1986	101.57	30 August 1983
101.58	30 August 1983	101.58	REPRINTED WITHOUT CHANGE
200.1	20 February 1986	200.1	2 July 1980
201.1 through 201.18	20 February 1986	201.1 through 201.19	2 July 1980

2. THE FOLLOWING NEW SECTION HAS BEEN ADDED:

NEW SECTION	DATE
202	20 February 1986

3. RETAIN THIS NOTICE AND INSERT BEFORE THE TABLE OF CONTENTS.

4. Holders of MIL-STD-1353B will verify that page changes indicated above have been entered. This notice page will be retained as a check sheet. This issuance, together with appended pages, is a separate publication. Each notice is to be retained by stocking points until the military standard is completely revised or canceled.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AT, AV, MI
Navy - AS
Air Force - 10, 11, 99
DLA - ES

User activities:
Army - CR
Navy - CG, MC, SH

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3494)


AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:08Z
Check the source to verify that this is the current version before use.

MIL-C-83723 PART NUMBERING SYSTEM

Part no. example: M83723/72R1203N

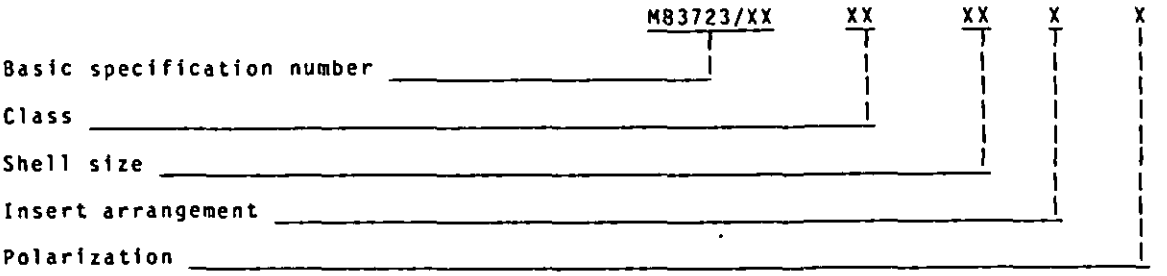

Shell configuration:

	Bayonet		Threaded	
	Pins	Sockets	Pins	Sockets
Single hole mount receptacle (hermetic crimp)	/65	---	---	---
Lanyard plug	---	---	/68	/69
Flange mount receptacle	/72	/71	/83	/82
Single hole mount receptacle	/74	/73	/85	/84
Straight plug	/76	/75	/87	/86
RFI plug	/78	/77	/92	/91
Flange mount (hermetic) (solder pin)	/79	---	/88	---
Solder mount (hermetic) (solder pin)	/80	---	/90	---
Single hole mount (hermetic) (solder pin)	/81	---	/89	---
Self-locking RFI plug	---	---	/98	/97
Self-locking plug	---	---	/96	/95
Solder mount (hermetic) (straight pin)	/93	---	---	---
Single hole mount (hermetic) (straight pin)	/94	---	---	---

Class: H - Hermetically sealed.
K - Firewall, environmental, self-locking.
R - Environmental resisting. For "space" applications only.
W - Olive drab cadmium plate (conductive).
S - Stainless steel, RFI grounding.

Shell size: Shell size in sixteenths of an inch.

Insert arrangement: See MIL-STD-1554.

Polarization: *Normal polarization* is considered preferred; however, alternate polarizations, when required by a system, do not require nonstandard part approval.

Contacts: MIL-C-39029/4 and MIL-C-39029/5.

Standard connectors: See table 101-III.

Supersedes page 101.57 of Notice 1.

Source: https://assist.dla.mil -- Downloaded: 202640-24T00:08Z
Check the source to verify that this is the current version before use.

Applicable documents	Applicable characteristics	Applicable restrictions	Page
Series III	Crimp contacts, rear release Solder contact hermetics only Contact sizes: 12, 16, 20 Temperature ranges: Class: H: -65°C to +150°C (hermetic) tin/cold rolled steel K: -65°C to +200°C (firewall) stainless steel passivated R: -65°C to +200°C electroless nickel/aluminum. For "space" applications only. S: -65°C to +200°C (firewall) plug and receptacle, RFI grounding self-locking plug) stainless steel passivated W: -65°C to +175°C Cadmium over suitable underplate/aluminum. Coupling: Threaded and bayonet.	ARMY: Not for use. NAVY: Not for use.	101.59

Supersedes page 101.58 of Notice 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:08Z
Check the source to verify that this is the current version before use.

SECTION 200

RADIO FREQUENCY CONNECTORS

Section		Page
201	CONNECTORS, RADIO FREQUENCY, COAXIAL	201.1
202	ADAPTERS, RADIO FREQUENCY, COAXIAL	202.1

Supersedes page 200.1 of 2 July 1980.

Source: https://assist.dla.mil -- Downloaded: 202610-24T00:08Z
Check the source to verify that this is the current version before use.

SECTION 201

CONNECTORS, RADIO FREQUENCY, COAXIAL
(Applicable specification: MIL-C-39012)

Applicable documents		Applicable characteristics	Applicable restrictions	Page
MIL-C-39012	-	This specification covers the general requirements and tests for radio frequency connectors used with flexible RF cables and certain other types of coaxial transmission lines.		201.3
Series N	-	Threaded coupling for RF cable in the .195 to .870 inch outside dimension (OD) range. Maximum operating volts - 1,000 rms at sea level.	None	201.4
Series C	-	Bayonet coupling for RF cable in the .280 to .870 inch OD range. Maximum operating volts - 1,000 rms at sea level.	None	201.5
Series BNC	-	Bayonet coupling for RF cable in the .160 to .250 inch OD range. Maximum operating volts - 500 rms at sea level.	Not for Navy use. Not for Air Force use in high vibration areas.	201.6
Series TNC	-	Threaded coupling for RF cable in the .100 to .250 inch OD range. Maximum operating volts - 500 rms at sea level.	None	201.7
Series SC	-	Threaded coupling for RF cable in the .195 to .870 inch OD range. Maximum operating volts - 1,000 rms at sea level.	None	201.8

Supersedes page 201.1 of 2 July 1980.

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:08Z
Check the source to verify that this is the current version before use.

Applicable documents		Applicable characteristics	Applicable restrictions	Page
Series SMA	-	Threaded coupling for RF cable in the .071 to .170 inch OD range. Maximum operating volts - 170 rms at sea level.	None	201.9
Series SMB	-	Bayonet coupling for RF cable in the .071 to .170 inch OD range. Maximum operating volts - 250 rms at sea level.	Not for Navy Airborne use.	201.11
Series SMC	-	Threaded coupling for RF cable in the .071 to .100 inch OD range. Maximum operating volts - 250 rms at sea level.	Not for Navy use.	201.11


Table no.	Cross reference	
201-II	MIL-C-17 to MIL-C-39012 conversion	201.12

Supersedes page of 201.2 of 2 July 1980.

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:08Z
Check the source to verify that this is the current version before use.

MIL-C-39012 PART NUMBERING SYSTEM

Part no. example: M39012/57-3006

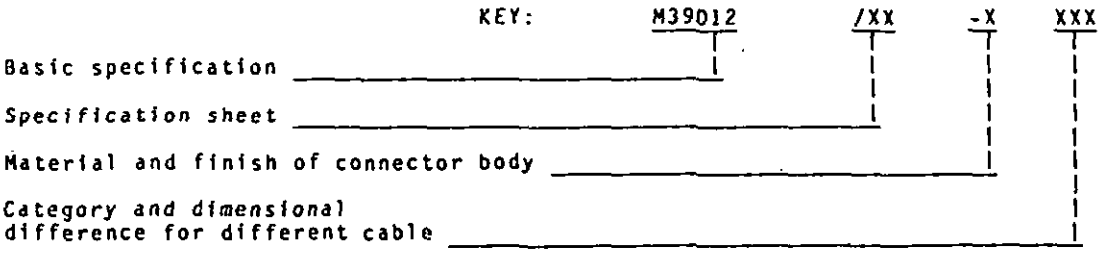

Criteria:

Material of connector body:

0XXX - Brass, silver plated
3XXX - Steel, corrosion-resisting, passivated 1/
4XXX - Copper beryllium, gold plated

Categories. The categories of connectors shall be designated by an A (field serviceable), B (non-field replaceable), C (field replaceable), D (field replaceable), E (field replaceable) and F (field replaceable) as follows:

Category A - Connectors that do not require special tools to assemble shall be designated as category A connectors. Standard wrenches, soldering equipment, pliers, etc., are not defined as special tools.

Category B - Connectors that require special tools to assemble shall be designated as category B connectors. These connectors may be used for original installations only. Field replacement is intended to be made by category A, C, D, E, or F connectors. Category B connectors will not be stocked or procured by the Government.

Category C - Connectors that require only standard military crimping tools and standard cable stripping dimensions to assemble shall be designated as category C connectors.

Category D - Connectors which require only standard military crimping tools for the center contact and outer ferrule, and standard cable stripping dimensions to assemble shall be designated as category D connectors.

Category E - Connectors that require only standard assembly tools and can be assembled in the field. The method of assembly of the connector to the cable outer conductor shall be solder.

Category F - Connectors using semirigid cables with standard stripping dimensions and using standard military assembly tools. The method of assembly of the connector to the cable shall be solderless.

Standard connectors: See table 201-I.

Cable to connector conversion: See table 201-II.

1/ A gold plate may be used in lieu of passivation for connectors that are assembled to the cable through the use of solder only.

Supersedes page 201.3 of 2 July 1980.

Source: https://assist.dla.mil -- Downloaded: 202610-24T00:08Z
Check the source to verify that this is the currenversion before use.

TABLE 201-I. Standard connectors, MIL-C-39012 type.

Application	Contact	Category	Part number M39012/	Applicable cable M17/ Swept	Applicable cable M17/ Nonswept
SERIES N - THREADED COUPLING					
Plug, straight	Pin		1-0016	73-RG212 1/	162-00001 1/
"	"		1-0021	65-RG165	159-00001
"	"	C	1-0023		6-RG11
"	"		1-0024		77-RG216 1/
"	"		1-0027		2-RG6 1/
"	"		1-0501	127-RG393	174-00001
"	"	D	1-0503	128-RG400	175-00001
"	"		1-0503	60-RG142	158-00001
Plugs and receptacles, four hole flange mounted	Socket		2-0027	73-RG212 1/	162-00001 1/
"	"		2-0030		77-RG216
"	"	C	2-0041	65-RG165	159-00001
"	"		2-0042		6-RG11
"	"		2-0043		2-RG6 1/
"	"		2-0511	127-RG393	174-00001
"	"	D	2-0513	60-RG142	158-00001
"	"		2-0513	128-RG400	175-00001
Jam nut mounted	Socket		3-0013	73-RG212 1/	162-00001 1/
"	"		3-0018	65-RG165	159-00001
"	"	C	3-0020		5-RG11
"	"		3-0020		62-RG144
"	"		3-0021		77-RG216 1/
"	"		3-0023		2-RG6 1/
"	"		3-0501	127-RG393	174-00001
"	"	D	3-0503	60-RG142	158-00001
"	"		3-0503	128-RG400	175-00001
Front mounted jam nut	"		4-0001		
Rear mounted flange	"	N/A	4-0002	N/A	N/A
Rear mounted jam nut	"		4-0003		
Plug, right angle	Pin-right angle		5-0501	75-RG214 1/	164-00001 1/
"	"	D	5-0501	127-RG393	174-00001 1/
"	"		5-0502	74-RG213 1/	163-00001
"	"		5-0503	60-RG142	158-00001
"	"		5-0503	128-RG400	175-00001

1/ PVC cable (jacket) not for aerospace applications.

Supersedes page 201.4 of 2 July 1980.

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:08Z
Check the source to verify that this is the current version before use.

TABLE 201-I. Standard connectors, MIL-C-39012 type - Continued.

Application	Contact	Category	Part number M39012/	Applicable cable M17/	
				Swept	Nonswept
SERIES C - BAYONET COUPLING					
Front jam nut mounted	Socket		9-0001		29-RG59 1/
"	"		9-0001		30-RG62 1/
"	"	A	9-0001		90-RG71
"	"		9-0002	28-RG058 1/	155-00001 1/
"	"		9-0002	84-RG223 1/	167-00001 1/
Rear mounted, flange mounted	Socket	N/A	12-0001	N/A	N/A
Jam nut mounted, front mounted	Socket	N/A	13-0001	N/A	N/A
Pressurized seal jam nut mounted	Socket	N/A	14-0001	N/A	N/A
Hermetic seal, jam nut mounted	"	"	14-0002	"	"
Plug, straight	Pin		15-0001		29-RG59 1/
"	"		15-0001		30-RG62 1/
"	"	A	15-0001		90-RG71
"	"		15-0002	28-RG58 1/	155-00001 1/
"	"		15-0002	84-RG223 1/	167-00001 1/

1/ PVC cable (jacket) not for aerospace applications.

Source: https://assist.dla.mil -- Downloaded: 202610-24T00:08Z
Check the source to verify that this is the current version before use.

TABLE 201-I. Standard connectors, MIL-C-39012 type - Continued.

Application	Contact	Category	Part number M39012/	Applicable cable M17/ Swept	Applicable cable M17/ Nonswept
SERIES BNC - BAYONET COUPLING					
Plug, straight	Pin		16-0013	111-RG303	170-00001
"	"		16-0014	84-RG223 1/	167-00001 1/
"	"	C	16-0015		29-RG59 1/
"	"		16-0015		30-RG62 1/
"	"		16-0017		90-RG71
"	"		16-0020		110-RG302
"	"		16-0502		95-RG180
"	"	D	16-0503	128-RG400	175-00001
"	Socket		17-0013	111-RG303	170-00001
"	"		17-0014	84-RG223 1/	167-00001 1/
"	"	C	17-0015		29-RG59 1/
"	"		17-0015		30-RG62 1/
"	"		17-0017		90-RG71
"	"		17-0020		110-RG302
"	"		17-0502		95-RG180
"	"	D	17-0503	60-RG142	158-00001
"	"		17-0503	128-RG400	175-00001
Receptacle, four hole flange mounted	Socket		18-0013	111-RG303	170-00001
"	"		18-0014	84-RG223 1/	167-00001 1/
"	"	C	18-0015		29-RG59 1/
"	"		18-0015		30-RG62 1/
"	"		18-0017		90-RG71
"	"		18-0020		110-RG302
"	"		18-0502		95-RG180
"	"	D	18-0503	128-RG400	175-00001
"	"		19-0013	111-RG303	170-00001
"	"		19-0014	84-RG223 1/	167-00001 1/
"	"	C	19-0014	60-RG142	158-00001
"	"		19-0015		29-RG59 1/
"	"		19-0015		30-RG62 1/
"	"		19-0017		90-RG71
"	"		19-0020		110-RG302
"	"		19-0502		95-RG180
"	"	D	19-0503	128-RG400	175-00001
Plug, right angle	Pin		20-0005	111-RG303	170-00001
"	"	C	20-0007	84-RG223 1/	167-00001 1/
"	"		20-0010		110-RG302
"	"		20-0501	54-RG122 1/	157-00001 1/
"	"	D	20-0502		95-RG180
"	"		20-0503	128-RG400	175-00001
Jam nut mounted receptacle, solder pot	Socket	N/A	21-0001	N/A	N/A
Flange mounted receptacle, solder pot	Socket	N/A	22-0001	N/A	N/A
Right angle, jam nut mounted receptacle, solder pot	Socket	N/A	23-0001	N/A	N/A
Jam nut mounted hermetically sealed receptacle solder contact	Socket	N/A	24-0001	N/A	N/A

1/ PVC cable (jacket) not for aerospace applications.

Supersedes page 201.6 of 2 July 1980.

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:08Z
Check the source to verify that this is the current version before use.

TABLE 201-I. Standard connectors, MIL-C-39012 type - Continued.

Application	Contact	Category	Part number M39012/	Applicable cable M17/ Swept	Applicable cable M17/ Nonswept
SERIES TNC - THREADED COUPLING					
Plug, straight	Pin		26-0010	111-RG303	170-00001
"	"		26-0011	84-RG223 1/	167-00001 1/
"	"	C	26-0012		29-RG59 1/
"	"		25-0012	60-RG142	158-00001
"	"		26-0012		97-RG210
"	"		26-0014		90-RG71
"	"		26-0021		110-RG302
"	"		26-0022	113-RG316	172-00001
"	"		26-0022	119-RG174	173-00001
"	"	D	26-0502		95-RG180
"	Socket	D	27-0502		95-RG180
Receptacle, jam nut mounted	Socket		28-0010	111-RG303	170-00001
"	"		28-0010	84-RG223 1/	167-00001 1/
"	"	C	28-0012		29-RG59 1/
"	"		28-0012		30-RG62 1/
"	"		28-0014		90-RG71
"	"		28-0021		110-RG302
"	"		28-0022	113-RG316	172-00001
"	"		28-0022	119-RG174 1/	173-00001 1/
"	"	D	28-0502		95-RG180
Receptacle, four hole flange mounted	Socket		29-0010	111-RG303	170-00001
"	"		29-0010	84-RG223 1/	167-00001 1/
"	"	C	29-0012		29-RG59 1/
"	"		29-0012		30-RG62 1/
"	"		29-0014		90-RG71
"	"		29-0021		110-RG302
"	"		29-0022	113-RG316	172-00001
"	"		29-0022	119-RG174 1/	173-00001 1/
"	"	D	29-0502		95-RG180
Plug, right angle	Pin		30-0010	111-RG303	170-00001
"	"		30-0011	84-RG223 1/	167-00001 1/
"	"	C	30-0012		29-RG59 1/
"	"		30-0014		90-RG71
"	"		30-0021		110-RG302
"	"		30-0022	113-RG316	172-00001
"	"		30-0022	119-RG174 1/	173-00001 1/
"	"	D	30-0502		95-RG180
Jam nut mounted receptacle, solder pot	Socket	N/A	31-0002	N/A	N/A
Flange mounted receptacle, solder pot	Socket	N/A	32-0001	N/A	N/A
Right angle, jam nut mounted receptacle, solder pot	Socket	N/A	33-0001	N/A	N/A
Jam nut mounted hermetically sealed receptacle solder contact	Socket	N/A	34-0002	N/A	N/A

1/ PVC cable (jacket) not for aerospace applications.

Supersedes page 201.7 of 2 July 1980.

Source: https://assist.dla.mil -- Downloaded: 202640-24T00:08Z
Check the source to verify that this is the current version before use.

TABLE 201-I. Standard connectors, MIL-C-39012 type - Continued.

Application	Contact	Category	Part number M39012/	Applicable cable M17/ Swept	Applicable cable M17/ Nonswept
SERIES SC - THREADED COUPLING					
Plug, straight	Pin	D	35-0501	75-RG214 1/	164-00001 1/
"	"		35-0501		86-00001
"	"		35-0501	127-RG393	174-00001
"	"		35-0503	60-RG142	158-00001
"	"		35-0503	128-RG400	175-00001
Plug, straight	Socket	D	36-0501	75-RG214 1/	164-00001 1/
"	"		36-0501		86-00001
"	"		36-0501	127-RG393	174-00001
"	"		36-0502	74-RG213 1/	163-00001 1/
Rear, flange mounted, cabled, receptacle	Socket	D	38-0501	127-RG393	174-00001
"	"		38-0503	60-RG142	158-00001
"	"		35-0503	128-RG400	175-00001
"	"	D	39-0501	127-RG393	174-00001
"	"		39-0503	60-RG142	158-00001
"	"		39-0503	128-RG400	175-00001
Plug, right angle	Pin	A	39-0101	65-RG165	159-00001
"	"		39-0101	74-RG213 1/	163-00001 1/
"	"		39-0101	75-RG214 1/	164-00001 1/
"	"		39-0101		86-00001
Receptacle, rear, jam nut mounted	Socket	D	40-0501	75-RG214 1/	164-00001 1/
"	"		40-0501		86-00001
"	"		40-0501	127-RG393	174-00001
"	"		40-0502	74-RG213 1/	163-00001 1/
Rear mounted	Socket	N/A	41-0001	N/A	N/A
Front jam nut mounted	Socket	N/A	42-0001	N/A	N/A

1/ PVC cable (jacket) not for aerospace applications.

Supersedes page 201.8 of 2 July 1980.

Source: https://assist.dla.mil -- Downloaded: 202610-24T00:08Z
Check the source to verify that this is the current version before use.

TABLE 201-I. Standard connectors, MIL-C-39012 type - Continued.

Application	Contact	Category	Part number M39012/	Applicable cable M17/ Swept	Applicable cable M17/ Nonswept
SERIES SMA - THREADED COUPLING					
Plug, straight	Pin		55-3025	93-RG178	169-00001
"	"		55-3026	119-RG174 1/	173-00001 1/
"	"	C	55-4026	113-RG316	172-00001
"	"		55-3027	54-RG122 1/	157-00001 1/
"	"		55-4028	84-RG223 1/	167-00001 1/
"	"		55-3029	28-RG58 1/	155-00001 1/
"	"		55-4029	111-RG303	170-00001
"	"	D	55-4502	128-RG400	175-00001
Right angle plug	Pin		56-3028	60-RG142	158-00001
"	"	C	56-4028	84-RG223 1/	167-00001 1/
"	"		56-3029	28-RG58 1/	155-00001 1/
Plug, straight	Socket		57-3025	93-RG178	169-00001
"	"		57-4026	113-RG316	172-00001
"	"	C	57-3027	54-RG122 1/	157-00001 1/
"	"		57-4028	84-RG223 1/	167-00001 1/
"	"		57-3029	28-RG58 1/	155-00001 1/
"	"		57-4029	111-RG303	170-00001
"	"	D	57-4502	128-RG400	175-00001
Cabled, flange mounted, receptacle	Socket		58-3025	93-RG178	169-00001
"	"		58-3026	119-RG174 1/	173-00001 1/
"	"	C	58-3027	54-RG122 1/	157-00001 1/
"	"		58-3029	28-RG58 1/	155-00001 1/
"	"	D	58-4502	128-RG400	175-00001
Cabled, jam nut mounted, receptacle	Socket		59-3025	93-RG178	169-00001
"	"		59-3026	119-RG174 1/	173-00001 1/
"	"	C	59-3027	54-RG122 1/	157-00001 1/
"	"		59-3029	28-RG58 1/	155-00001 1/
"	"	D	59-4502	128-RG400	175-00001
Flange mounted receptacle, solder pot	Socket	N/A	60-3001	N/A	N/A
Jam nut mounted receptacle, solder pot	Socket	N/A	61-3002	N/A	N/A
Hermetically sealed jam nut mounted, receptacle solder contact	Socket	N/A	62-3002	N/A	N/A

1/ PVC cable (jacket) not for aerospace applications.

Supersedes page 201.9 of 2 July 1980.

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:08Z
Check the source to verify that this is the current version before use.

TABLE 201-I. Standard connectors, MIL-C-39012 type - Continued.

Application	Contact	Category	Part number M39012/	Applicable cable M17/
SERIES SMA - THREADED COUPLING				Swept
Plug, straight semirigid cable	Pin	E	79-3008	130-RG402 130-00001 130-00002 130-00003
Semirigid cable right angle plug	Pin	E	80-3008	130-RG402 130-00001 130-00002 130-00003
Semirigid cable, cabled plug	Socket	E	81-3008	130-RG402 130-00001 130-00002 130-00003
Flange mounted semi-rigid cable receptacle	Socket	E	82-3008	130-RG402 130-00001 130-00002 130-00003
Jam nut mounted semi-rigid cable receptacle	Socket	E	83-3008	130-RG402 130-00001 130-00002 130-00003
Printed circuit receptacle	Socket	N/A	93-3001 93-3002 93-3003	N/A
Printed circuit receptacle, right angle	Socket	N/A	94-3001 94-3002 94-3003	N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:08Z
Check the source to verify that this is the current version before use.

TABLE 201-I. Standard connectors, MIL-C-39012 type - Continued.

Application	Contact	Category	Part number M39012/	Applicable cable M17/	
				Swept	Nonswept
SERIES SMB - BAYONET COUPLING					
Right angle plug	Socket	C	69-0012	119-RG174 1/	173-00001 1/
"	"		69-0012	113-RG316	172-00001
"	"		69-0012	94-RG179	
Rear jam nut mounted	Pin	N/A	71-0001	N/A	N/A
Front jam nut mounted	Pin	N/A	71-0002	N/A	N/A
Printed circuit receptacle	Pin	N/A	95-0001	N/A	N/A
"	"		95-0002		
"	"		95-0003		
Printed circuit right angle receptacle	Pin	N/A	96-0001	N/A	N/A
"	"		96-0002		
"	"		96-0003		
SERIES SMC - THREADED COUPLING				Swept	Nonswept
Plug, straight	Socket	A	73-0003	93-RG178	169-00001
"	"		73-0004	119-RG174 1/	173-00001 1/
"	"		73-0004	113-RG316	172-00001
"	"		73-0004	94-RG179	
"	Pin	A	74-0003	93-RG178	169-00001
"	"		74-0004	119-RG174 1/	173-00001 1/
"	"		74-0004	113-RG316	172-00001
"	"		74-0004	94-RG179	
Plug, right angle	Socket	A	75-0003	93-RG178	169-00001
"	"		75-0004	119-RG174 1/	173-00001 1/
"	"		75-0004	113-RG316	172-00001
"	"		75-0004	94-RG179	
Receptacle, rear mounted, jam nut	Pin	A	76-0003	93-RG178	169-00001
"	"		76-0004	119-RG174 1/	173-00001 1/
"	"		76-0004	113-RG316	172-00001
"	"		76-0004	94-RG179	
Receptacle, rear mounted, jam nut, solder pot	Pin	N/A	77-0001	N/A	N/A
"	"		77-0002		

1/ PVC cable (jacket) not for aerospace applications.

Supersedes page 201.11 of 2 July 1980.

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:08Z
Check the source to verify that this is the current version before use.

TABLE 201-II. MIL-C-17 to MIL-C-39012 conversion.

M17/	M39012/
6-RG011	02-0003 02-0006 03-0012
28-RG058 1/	16-0504 17-0504 18-0504 19-0504 20-0504 26-0504 27-0504 28-0504 29-0504 30-0504 55-3029 56-3029 57-3029 58-3029 59-3029
29-RG059 1/	16-0015 17-0015 18-0015 19-0015 26-0012 27-0012 28-0012 29-0012 30-0012
30-RG062 1/	16-0015 17-0015 18-0015 19-0015 26-0012 27-0012 28-0012 29-0012 30-0012

1/ PVC cable (jacket) not for aerospace applications.

Source: https://assist.dla.mil -- Downloaded: 202610-24T00:08Z
Check the source to verify that this is the current version before use.

TABLE 201-II. MIL-C-17 to MIL-C-39012 conversion - Continued.

M17/	M39012/
54-RG122 1/	16-0501 17-0501 18-0501 19-0501 20-0501 26-0501 27-0501 28-0501 29-0501 30-0501 55-3027 56-3027 57-3027 58-3027 59-3027
60-RG142	16-0503 17-0503 18-0503 19-0503 20-0503 26-0503 27-0503 28-0503 29-0503 30-0503 55-3028 55-4502 56-4502 57-4502 58-4502 59-4502
62-RG144	02-0003 02-0006 03-0012
65-RG165	02-0003 02-0006 03-0012

1/ PVC cable (jacket) not for aerospace applications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:08Z
Check the source to verify that this is the current version before use.

TABLE 201-II. MIL-C-17 to MIL-C-39012 conversion - Continued.

M17/	M39012/
73-RG212 1/	
74-RG213 1/	01-0502 02-0502 02-0512 03-0502 05-0502 35-0502 36-0502 38-0502 39-0502 40-0502
75-RG214 1/	01-0501 02-0501 02-0511 03-0501 05-0501 35-0501 36-0501 38-0501 39-0501 40-0501
77-RG216 1/	01-0005 02-0003 02-0006 03-0012
78-RG217 1/	
79-RG218 1/	

1/ PVC cable (jacket) not for aerospace applications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:08Z
Check the source to verify that this is the current version before use.

TABLE 201-II. MIL-C-17 to MIL-C-39012 conversion - Continued.

M17/	M39012/
84-RG223 1/	16-0014 17-0014 18-0014 19-0014 20-0007 26-0011 27-0011 28-0011 29-0011 30-0011 55-3028 56-3028 57-3028 58-3028 59-3028
86-00001	40-0501
90-RG071	16-0017 17-0017 18-0017 19-0017 26-0014 27-0014 28-0014 29-0014 30-0014
93-RG178	55-3025 56-3025 57-3025 58-3025 59-3025 67-0003 68-0003 69-0003 70-0003 73-0003 74-0003 75-0003 76-0003
94-RG179	67-0004 68-0004 69-0004 70-0004 73-0004 74-0004 75-0004 76-0004

1/ PVC cable (jacket) not for aerospace applications.

Source: https://assist.dla.mil -- Downloaded: 202640-24T00:08Z
Check the source to verify that this is the current version before use.

TABLE 201-II. MIL-C-17 to MIL-C-39012 conversion - Continued.

M17/	M39012/
97-RG210	16-0502 17-0502 18-0502 19-0502 20-0502 26-0502 27-0502 28-0502 29-0502 30-0502
97-RG210	16-0015 17-0015 18-0015 19-0015 26-0012 27-0012 28-0012 29-0012 30-0012
110-RG302	16-0015 17-0020 18-0020 19-0020 20-0010 29-0017
111-RG303	16-0013 17-0013 18-0013 19-0013 20-0010 26-0010 27-0010 28-0010 29-0010 30-0010 55-3029 56-3029 57-3029 58-3029 59-3029

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:08Z
Check the source to verify that this is the current version before use.

TABLE 201-II. MIL-C-17 to MIL-C-39012 conversion - Continued.

M17/	M39012/
112-RG304	
113-RG316	28-0018 55-3026 56-3026 57-3026 58-3026 59-3026 67-0004 68-0004 69-0004 70-0004 73-0004 74-0004 75-0004 76-0004
119-RG174 1/	28-0018 55-3026 56-3026 57-3026 58-3026 59-3026 67-0004 68-0004 69-0004 70-0004 73-0004 74-0004 75-0004 76-0004
127-RG393	01-0501 02-0501 02-0511 03-0501 05-0501 35-0501 36-0501 38-0501 39-0501 40-0501

1/ PVC cable (jacket) not for aerospace applications.

Source: https://assist.dla.mil -- Downloaded: 202610-24T00:08Z
Check the source to verify that this is the current version before use.

TABLE 201-II. MIL-C-17 to MIL-C-39012 conversion - Continued.

M17/	M39012/
128-RG400	16-0503 17-0503 18-0503 19-0503 20-0503 26-0503 27-0503 28-0503 29-0503 30-0503 55-4502 56-4502 57-4502 58-4502 59-4502
130-RG402	79-3008 80-3008 81-3008 82-3008 83-3008
133-RG405	79-3007 80-3007 81-3007 82-3007 83-3007


1/ PVC cable (jacket) not for aerospace applications.

Supersedes page 201.18 of 2 July 1980.

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:08Z
Check the source to verify that this is the current version before use.

MIL-A-55339 PART NUMBERING SYSTEM

Part no. example: M55339/05-00057

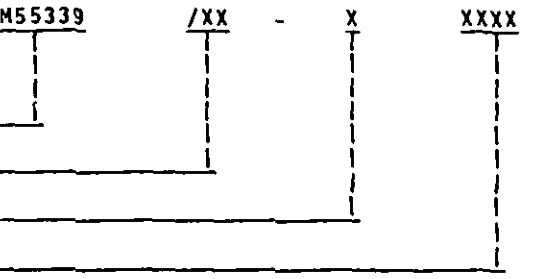

Criteria:

Material of adapter body:

0XXXX - Brass
1XXXX - Phosphor bronze
2XXXX - Aluminum
3XXXX - Corrosion-resisting steel
4XXXX - Copper-beryllium
5XXXX - Copper-beryllium to brass 1/

Standard adapters: See table 202-1.

1/ To be used between series SMA and other series. SMA body to be copper-beryllium and the rest of the adapter to be brass.

Source: https://assist.dla.mil -- Downloaded: 202610-24T00:08Z
Check the source to verify that this is the current version before use.

TABLE 202.I. Standard adapters, MIL-A-55339 type.

Applications	Series reference	Part number M55339/
Socket to socket	BNC to N	01-00001
Pin to socket, right angle	SMA	02-30001
Pin to socket, right angle	N	03-00027
Socket to socket, jam nut, hermetic	N	04-00030
Pin to pin	N	05-00057
All sockets, TEE	N	06-00028
Socket to socket	N	07-00029
Socket to socket	BNC	08-00643
Pin to pin	C	09-00642
Pin to socket, right angle	C	10-00567
One pin, two sockets, TEE	C	11-00566
Socket to socket, jam nut, hermetic	C	12-01138
Socket to socket, jam nut	BNC	13-00001
Socket to socket, jam nut, hermetic	BNC	13-00492
Pin to socket, right angle	BNC	14-00306
Pin to pin	BNC	15-00491
Socket to socket	BNC	16-00914
One pin two sockets, TEE	BNC	17-00274
Pin to pin	BNC to N	18-01034
Socket to pin	N to C	19-00565
Socket to pin	BNC to N	20-00201
Socket to pin	C to N	21-00564
Socket to pin	BNC to C	22-00636
Socket to pin	C to BNC	23-00635
Pin to socket, 4 hole flange	BNC to N	24-00335
Socket to socket, jam nut	BNC to N	25-00606
Socket to socket, jam nut, hermetic	SMA	28-30001
Pin to pin	SMA	29-30001
One pin, two sockets, TEE	SMA	30-30001 30-40001
One pin, two sockets, TEE (without safety wire holes)	SMA	30-30101 30-40101
Socket to socket	SMA	31-30001
Pin to socket, right angle	TNC	32-00001
Socket to socket	TNC	33-00001
Socket to socket, jam nut, hermetic	TNC	34-30001 34-00001

Source: https://assist.dla.mil -- Downloaded: 202610-24T00:08Z
Check the source to verify that this is the current version before use.

TABLE 202.I. Standard adapters, MIL-A-55339 type - Continued.

Applications	Series reference	Part number M55339/
One pin, two sockets, TEE	TNC	35-00001
Pin to pin	TNC	36-00001
Socket to socket	BNC to TNC	37-00001
Pin to socket	BNC to TNC	38-00001
Pin to pin	BNC to TNC	39-00001
Pin to socket	SMA to TNC	40-30001
Pin to socket, no safety wire holes	SMA to TNC	40-30101
Socket to socket	SMA to TNC	41-30001
Socket to pin	SMA to BNC	44-30001
Pin to pin, no safety wire holes	SMA to BNC	45-30101
Socket to socket	SMA to BNC	46-30001
Pin to socket	SMA to BNC	47-30101
Socket to pin	N to BNC	49-00349
Three sockets, one jam nut, TEE	TNC	50-00001
Socket to pin	TNC to N	51-00001

Source: https://assist.dla.mil -- Downloaded: 202610-24T00:08Z
Check the source to verify that this is the current version before use.