MIL-S-82489(OS)
26 July 1967
Superseding
NOTS XS 485 Rev. J
12 May 1967

MILITARY SPECIFICATION

SWITCH, DRIVER
MARK 76 MOD 0

This specification has been approved by the Naval Ordnance Systems Command, Department of the Navy

1. SCOPE

1.1 This specification establishes the requirements of one type of Switch, Driver, Mark 76 Mod 0. (See 6.1 for intended use and description.)

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on the date of invitation for bids, form a part of this specification to the extent specified herein except as noted.

SPECIFICATION

FEDERAL

PPP-B-621	Boxes, Wood, Nailed and Lock Corner

MILITARY

MIL-P-116	Preservation, Methods of
MIL-L-10547	Liners, Case and Sheet, Overwrap, Water-vapor Proof or Waterproof, Flexible

FSC -1375

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:12Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-102	Preservation, Packaging, and Packing Levels

MILITARY

MIL-STD-105D	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-167	Mechanical Vibration of Shipboard Equipment

DRAWINGS

BUREAU OF NAVAL WEAPONS

LD 497876	Switch, Driver Mk 76 Mod 0 and all documents listed thereon
LD 624595	Tester, Acceptance, Driver Switch

PUBLICATIONS

BUREAU OF NAVAL WEAPONS

OD 13782	Operation and Maintenance of Acceptance Tester for Driver Switch Mk 76 Mod 0

(Copies of specifications, standards, drawings, and publications requested by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other Publications

Interstate Commerce Commission

49 CFR Part 71 to 78	Interstate Commerce Commission Rules and Regulations for the Transportation of Explosives and other Dangerous Articles.

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:12Z
Check the source to verify that this is the current version before use.

(The Interstate Commerce Commission regulations are now a part of the Code of Federal Regulations and are available from the Superintendent of Documents, Government Printing Office, Washington, D.C. 20402. Orders for the above publication should cite "the latest issue and supplements thereto".)

3. REQUIREMENTS

3.1 General requirements. Unless otherwise specified in the contract or order, all materials and treatments of materials and parts used in the manufacture of the switch shall be in accordance with the requirements specified herein and with the applicable documents listed in LD 497876.

3.2 Preproduction samples. Unless otherwise specified in the contract or order, preproduction samples of the switch shall be manufactured using the methods and procedures proposed for production. The sample shall be tested as specified in Section 4 herein and is for the purpose of determining that, prior to starting production, the contractor's production methods are capable of yielding items that comply with the technical requirements of the contract.

3.3 Safety. The supplier or manufacturer, as applicable, shall provide adequate safety precautions for personnel during handling of the switch. (See 6.5.)

3.4 Performance and product characteristics. The switch shall meet the following performance and product characteristics.

3.4.1 Circuit requirements before functioning.

3.4.1.1 Current carrying capacity. The normally closed circuit of the switch shall be capable of carrying a direct current of 1 ampere.

3.4.1.2 Normally closed circuit resistance. The normally closed circuit of the switch shall have a resistance of not greater than 0.03 ohm.

3.4.1.3 Electric initiation circuit resistance. The electric initiation circuit of the switch shall have a resistance of 4.50 plus or minus 0.50 ohms at 70 degrees Fahrenheit (F).

3.4.1.4 Insulation resistance. The switch shall have an insulation resistance of not less than 50 megohms between the following mutually insulated points when the applied potential is 500 volts DC.

a. The case

b. Either terminal of the normally closed circuit

c. One terminal of the normally open circuit

d. The other terminal of the normally open circuit.

Source: https://assist.dla.mil -- Downloaded: 202640-23T07:12Z
Check the source to verify that this is the current version before use.

3.4.1.5 Insulation resistance, electric initiation circuit. The switch shall have an insulation resistance of not less than 50 megohms between the initiation circuit and the case when the applied potential is 50 volts DC.

3.4.2 Electric initiation circuit sensitivity. The electric initiation circuit of the switch shall carry a direct current of 50 milliamperes without initiating the switch.

3.4.3 Functioning. The switch shall be capable of functioning while stabilized at temperatures ranging from plus 35 to plus 120 degrees F.

3.4.3.1 Functioning current. The switch shall open the normally closed circuit and close the normally open circuit when a direct current of 230 milliamperes is applied through the electric initiation circuit.

3.4.3.2 Functioning time. The switch shall open the normally closed circuit and close the normally open circuit within 1 to 25 milliseconds from the moment the electric initiation current is applied.

3.4.4 Circuit requirements, after functioning.

3.4.4.1 Current carrying capacity. The normally open circuit of the switch shall be capable of carrying a direct current of 1 ampere.

3.4.4.2 Normally open circuit resistance. The normally open circuit of the switch shall have a resistance of not greater than 0.03 ohm.

3.4.4.3 Insulation resistance. The switch shall have an insulation resistance of not less than 20 megohms between the following mutually insulated points when the applied potential is 500 volts DC.

a. The case

b. Either terminal of the normally open circuit

c. One terminal of the normally closed circuit

d. The other terminal of the normally closed circuit.

3.5 Environmental requirements. Unless otherwise specified, the switch shall be capable of conforming to the performance and product characteristics of this specification after being exposed to the environments and all conditions specified herein.

3.5.1 Temperature, storage condition. The switch shall withstand temperatures from minus 65 to plus 160 degrees F.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

3.5.2 Vibration.

3.5.2.1 Standby condition. The switch shall withstand vibration as specified for Type I equipment in MIL-STD-167 up to 25 cycles per second (cps).

3.5.2.2 Operating condition. The switch shall withstand vibration through a frequency range of 20 to 2000 cps at 0.10 inch double amplitude or 10g, (g = unit of gravitational acceleration) whichever is less.

3.5.3 Acceleration. The switch shall withstand acceleration of 25g for 4 seconds applied in the direction shown in Figure 1.

3.5.4 Shock, standby condition. The switch shall withstand shocks of 40g peak magnitude. The shock shall have a pulse shape approximating a one-half sine wave having a duration of 5 milliseconds.

3.6 Workmanship. The workmanship and finish shall be of sufficiently high grade to assure satisfactory operation consistent with the requirements of this specification. All parts used in the assembly shall be thoroughly clean and free of excess materials, chips, and loose or splattered foreign materials. The standards of workmanship exhibited in any approved preproduction sample, subject to any qualifications stated in the Government's notice of approval, shall be determinative of the requirements of the contract relative to workmanship insofar as not specifically covered by applicable specifications.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. Inspection of the switch shall be classified as follows:

a. Preproduction and periodic production inspection. (See 4.5.)

b. Quality conformance inspection. (See 4.6.)

4.3 Sampling. (See 6.2.1.)

4.3.1 Lot size. The term "lot" shall mean "inspection lot", that is, a collection of product submitted by a supplier for inspection. Unless otherwise specified in the contract or order the number of product in each lot shall be three thousand (3000).

Source: https://assist.dla.mil -- Downloaded: 20261O-23T07:12Z
Check the source to verify that this is the currentversion before use.

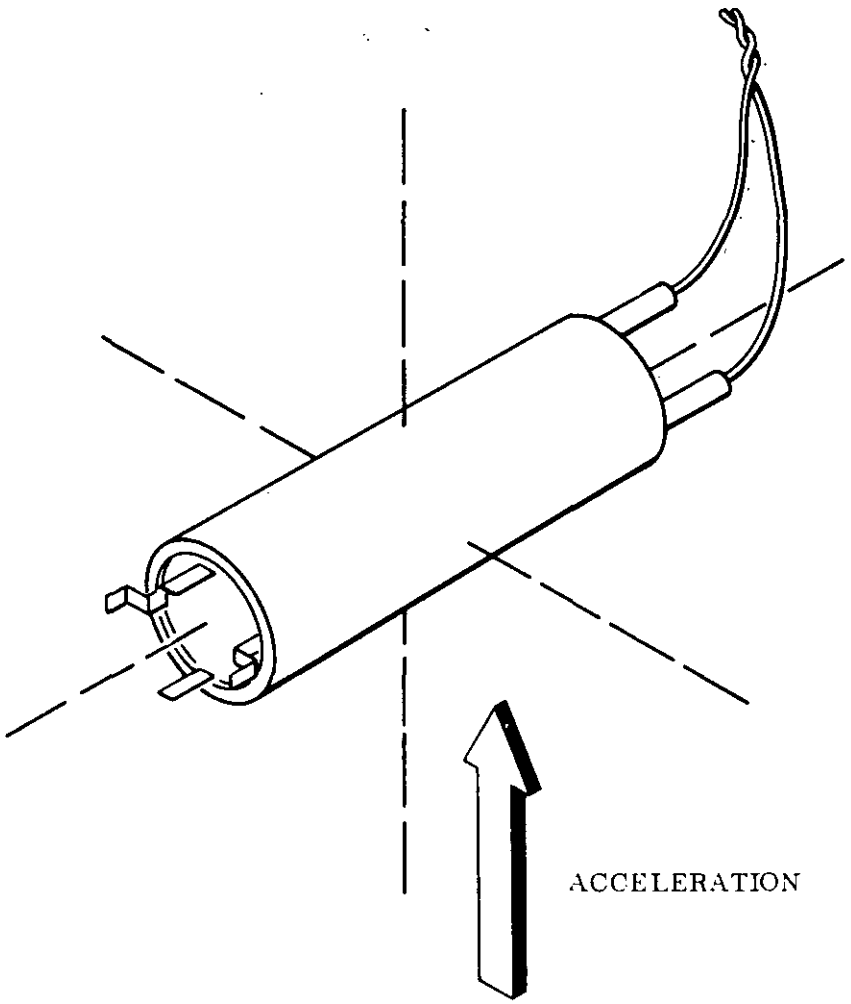


Figure 1. Environmental Testing Axes

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

4.3.2 Preproduction sample. A preproduction sample of one hundred and fifty (150) switches, manufactured in accordance with 3.2, shall be subjected to the preproduction tests detailed in 4.5. Acceptance of the preproduction sample shall be based on no defects in the sample. Further production of the switch by the supplier, prior to approval of the preproduction sample, shall be at the supplier's risk.

4.3.3 Periodic production sample. From each succeeding lot of three thousand (3000) or less, a random sample of fifty (50) switches shall be selected. These sample units shall be subjected to the tests of 4.5. The switches shall be considered satisfactory if they meet all specification and pertinent drawing requirements and withstand the tests specified in 4.5. (See Table I.) When a defective unit is found in any lot, acceptance of all units in the lot shall be withheld and the contractor shall:

a. Determine the cause of the defect.

b. Take the necessary action, with the concurrence of the procuring activity, to correct or eliminate the defect from all units in the lot and, if so directed by the procuring activity, from those units previously shipped.

c. Submit to the procuring activity for approval the proposed corrective action to prevent recurrence of the defect.

Table I. Preproduction and Periodic Production Test Sequence

Test	Paragraph Number	Test Quantities Preproduction	Periodic
Quality Conformance Inspection	4.6*	150	50
Temperature, Storage Condition	4.5.1.1	150	50
Quality Conformance Inspection	4.6	50**	15**
Shock, Standby Condition	4.5.1.5	100	35
Vibration, Standby Condition	4.5.1.3	100	35
Quality Conformance Inspection	4.6	50**	15**
Acceleration	4.5.1.2	50	20
Vibration, Operating Condition	4.5.1.4	50	20
Quality Conformance Inspection	4.6	50**	20**

*Except for functioning tests, 4.6.1.2, and circuit tests, after functioning, 4.6.1.3.
**Samples are expended during functioning.

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:12Z
Check the source to verify that this is the current version before use.

4.3.4 Quality conformance inspection sampling. Samples shall be selected as specified in 4.6 and shall be used to determine the acceptability of the switch inspected as specified in 4.6.

4.4 Test equipment and test conditions.

4.4.1 Quality conformance inspection equipment. The following items of test equipment are required to perform the quality conformance inspection tests.

Equipment	Capability
a. Tester, acceptance, driver switch	Conform to BuWeps LD 624595. Operate in accordance with OD 13782
b. Megohmmeter	Measure insulation resistance up to 50 megohms at a potential of 500 plus or minus 50 and 50 plus or minus 5 volts DC; accuracy within 10 percent at 50 and 20 megohms
c. Temperature chamber	Maintain temperature at: 35 plus 5 minus 0 degrees F 70 plus or minus 5 degrees F 120 plus 0 minus 5 degrees F
d. Time interval counter	Measure from 0.1 to 100 milliseconds; accurate to within 2 percent. The start and stop circuits shall be capable of being triggered with voltages from 0.5 to 30 volts DC
e. Milliohmmeter	Measure resistance of 0.010 to 10.0 ohms; accuracy to plus or minus 3 percent at 0.03 ohm and at 4.50 ohms

4.4.2 Preproduction and periodic production test equipment. The following items of test equipment, in addition to selected items of quality conformance inspection equipment and pieces of equipment recommended by applicable specifications or standards referenced within test procedure paragraphs, are required to perform the preproduction and periodic production tests:

Equipment	Capability
a. Temperature chamber	Maintain temperature at: Minus 65 plus 5 minus 0 degrees F Plus 160 plus 0 minus 5 degrees F

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

Equipment	Capability
b. Vibration testing machine	Control frequency from 20 cps to 2000 cps while subjecting the test item to 0.10-inch double amplitude or 10g acceleration, whichever is less; maintain direction of vibration along specified axes
c. Centrifuge	0 to 27.5g; maintain acceleration at 25 plus 2.5 minus 0g
d. Shock equipment	Apply shocks of 40 plus or minus 4g; a one-half sine wave pulse shape having a duration of 5 plus 3 minus 0 milliseconds; maintain direction along specified axes

4.4.3 Test conditions. Unless otherwise specified, the switch shall be subjected to the preproduction and periodic production tests and quality conformance inspection tests under the following conditions:

a. Temperature	-Room ambient (65 to 95 degrees F)
b. Altitude	-Normal ground atmospheric pressure
c. Humidity (Relative)	-Room ambient up to 95 percent

4.5 Preproduction and periodic production inspections. The preproduction samples shall be subjected to the tests specified in 4.5.1 after satisfactorily passing the quality conformance inspections of 4.6.1.1.1, 4.6.1.1.2, 4.6.1.1.3, 4.6.1.1.4, 4.6.1.1.5, 4.6.1.1.6 and 4.6.1.4.

4.5.1 Test procedure. Subject the switch to the test sequence listed in Table I. Unless otherwise specified in the individual test paragraph, the quality conformance inspection, as specified in Table I, shall be performed subsequent to environmental tests under test conditions specified in 4.4.3. Failure of the switch to pass any one of these tests shall constitute a defective unit.

4.5.1.1 Temperature, storage condition. The switch shall be subjected to a temperature of minus 65 plus 5 minus 0 degrees F for not less than 48 hours. The temperature shall be raised to plus 160 plus 0 minus 5 degress F in not less than 2 hours and maintained at this temperature for not less than 48 hours. The unit shall then be subjected to room temperature for not less than 4 hours prior to performing subsequent tests.

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:12Z
Check the source to verify that this is the current version before use.

4.5.1.2 Acceleration. The switch, rigidly mounted, shall be subjected to acceleration of 25 plus 2.5 minus 0g in the direction shown in Figure 1 for not less than 4 seconds.

4.5.1.3 Vibration, standby condition. The switch, rigidly mounted, shall be subjected to the vibration tests for Type I equipment as specified in MIL-STD-167 up to 25 cps in each of the three axes shown in Figure 1.

4.5.1.4 Vibration, operating condition. The switch, rigidly mounted, shall be subjected to vibration from 20 to 2000 cps at 0.10-inch double amplitude or 10g, whichever is less, along each of three mutually perpendicular axes. The frequency shall be increased uniformly from 20 to 2000 cps. The frequency shall be traversed in not less than 2.5 minuts, once in each axis.

4.5.1.5 Shock, standby condition. The switch, rigidly mounted, shall be subjected to shocks of 40 plus or minus 4g peak magnitude with a pulse shape approximating a one-half sine wave, having a duration of 5 plus 3 minus 0 milliseconds. Shocks shall be applied three times in each direction along each of three mutually perpendicular axes as shown in Figure 1.

4.6 Quality conformance inspection. Samples selected using the plans and procedures set forth in Table II of this specification, shall be subjected to the tests and examinations as described in 4.6.1.

WARNING

Provide a protective barrier for inspection personnel to prevent possible injury due to fragmentation during quality conformance inspection tests.

4.6.1 Test procedure. The switch shall be subjected to the tests and examinations as outlined herein. Unless otherwise specified, inability of the switch to pass the tests and examinations shall constitute a failure.

4.6.1.1 Circuit tests, before functioning.

4.6.1.1.1 Current carrying capacity. Connect the driver switch acceptance tester, hereinafter referred to as the tester, specified in 4.4.1a, and apply a direct current of 1.0 plus or minus 0.05 ampere through the closed contacts for not less than 1 minute. Measure the voltage drop across the closed contacts during application of the current. The voltage drop shall vary not more than 3 millivolts.

4.6.1.1.2 Normally closed circuit resistance. Measure the resistance across the terminals of the normally closed circuit, using the tester, and the milliohmmeter specified in 4.4.1e. The resistance shall be not greater than 0.03 ohm.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

Table II. Quality Conformance Tests, Examinations and AQL

Test or Examination	Sampling Plan	AQL	Test Paragraph
Current carrying capacity	*	0.25	4.6.1.1.1
Normally closed circuit resistance	*	1.00	4.6.1.1.2
Electric initiation circuit resistance	*	1.00	4.6.1.1.3
Insulation resistance	*	1.00	4.6.1.1.4
Insulation resistance electric initiation circuit	*	0.25	4.6.1.1.5
Electric initiation circuit sensitivity	*	0.25	4.6.1.1.6
Functioning current	*	0.25	4.6.1.2.1
Functioning time	*	1.00	4.6.1.2.2
Current carrying capacity normally open circuit	*	0.25	4.6.1.3.1
Normally open circuit resistance	*	0.25	4.6.1.3.2
Insulation resistance	*	1.00	4.6.1.3.3
Visual examination	**	**	4.6.1.4
Preservation, packaging, packing and marking	**	**	4.7

* MIL-STD-105D Inspection Level II
** One hundred percent inspection; defect is cause for rejection of individual unit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

4.6.1.1.3 Electric initiation circuit resistance. Subject the switch to temperatures of 70 plus or minus 5 degrees F for a period of two hours. Measure the resistance through the electric initiation circuit, using the tester and milliohmmeter. The resistance shall be 4.50 plus or minus 0.50 ohm.

WARNING

The electric initiation circuit leads must be twisted together during the insulation resistance test to prevent inadvertent firing of the switch.

4.6.1.1.4 Insulation resistance. Measure the resistance between the following mutually insulated points using the tester and megohmmeter specified in 4.4.1b. Apply a potential of 500 plus or minus 50 volts DC. The resistance shall be not less than 50 megohms.

a. The case

b. Either terminal of the normally closed circuit

c. One terminal of the normally open circuit

d. The other terminal of the normally open circuit.

4.6.1.1.5 Insulation resistance, electric initiation circuit. Measure the insulation resistance between the electric initiation circuit leads shorted together and the case, using the tester and the megohmmeter. The resistance shall be not less than 50 megohms when the applied potential is 50 plus or minus 5 volts DC.

4.6.1.1.6 Electric initiation circuit sensitivity. Apply a direct current of 50 plus or minus 2 milliamperes through the electric initiation circuit for not less than 30 seconds, using the tester. The switch shall not function.

4.6.1.2 Functioning test. Divide the sample into two equal or nearly equal groups. Subject one group to 35 plus 5 minus 0 degrees F, and the other group to 120 plus 0 minus 5 degrees F, for not less than 2 hours, using the temperature chamber specified in 4.4.1c. Perform the tests of 4.6.1.2.1 and 4.6.1.2.2 simultaneously and while the switches are maintained at the temperature specified herein.

4.6.1.2.1 Functioning current. Apply a current of 230 plus 10 minus 0 milliamperes through the electric initiation circuit, using the tester. The switch shall function.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

4.6.1.2.2 Functioning time. Measure the time interval from the moment of current application until the normally open circuit closes, using the tester and time interval counter specified in 4.4.1d. The time interval shall be not less than 1 millisecond nor greater than 25 milliseconds.

4.6.1.3 Circuit tests after functioning.

4.6.1.3.1 Current carrying capacity, normally open circuit. Apply a direct current of 1 plus or minus 0.05 ampere through the normally open circuit for not less than 1 minute, using the tester. Measure the voltage drop across the circuit during the application of current. The voltage drop shall vary not more than 3 millivolts.

4.6.1.3.2 Normally open circuit resistance. Measure the resistance across the terminals of the normally open circuit, using the tester. The resistance shall be not greater than 0.03 ohm.

4.6.1.3.3 Insulation resistance. Measure the resistance between the following mutually insulated points, using the tester and megohmmeter. Apply a potential of 500 plus or minus 50 volts DC. The resistance shall be not less than 20 megohms.

a. The case

b. Either terminal of the normally open circuit

c. One terminal of the normally closed circuit

d. The other terminal of the normally closed circuit.

4.6.1.4 Visual examination. Visual examination shall be made on each switch submitted for delivery to the procuring agency. The switch shall be examined for conformance to the requirements of good workmanship in 3.6. Nonconformance is cause for rejection of individual unit.

4.7 Preservation, packaging, packing, and marking. The switch shall be examined for conformance to the prescribed preservation, packaging, packing, and marking requirements of Section 5.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be Level A or C as specified. (See 6.2b and 6.4.)

5.1.1 Level A.

5.1.1.1 Cleaning. The switch shall be cleaned in accordance with Method C-1 of MIL-P-116.

Source: https://assist.dla.mil -- Downloaded: 20260-23T07:12Z
Check the source to verify that this is the current version before use.

5.1.1.2 Drying. The switch shall be dried in accordance with Method D-1 of MIL-P-116.

5.1.1.3 Unit Packaging. The switch shall be individually packaged in accordance with Method IId of MIL-P-116.

5.1.2 Level C. Cleaning, drying, preservation and packaging shall be in accordance with the supplier's commercial practice, when such practices have been approved by the procuring activity.

5.2 Packing. Packing shall be Level A or C as specified. (See 6.2c and 6.4.)

5.2.1 Level A. Unless otherwise specified in the contract, order or requisition, the switch shall be packed in exterior type shipping containers, PPP-B-621, of uniform size and shape, with the minimum cube and tare consistent with the protection required. The gross weight of each pack shall be limited to approximately 100 lbs. Containers shall be provided with a case liner, MIL-L-10547, and shall be closed and strapped in accordance with PPP-B-621.

5.2.2 Level C. The switch packaged as specified in 5.1.2 shall be packed to afford protection against damage during direct shipment from the supply source to the first receiving activity for immediate use. Shipping containers shall conform to 49 CFR 71-78, or other carrier regulations applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, unit packages, intermediate packages, and shipping containers shall be marked in accordance with the requirements of MIL-STD-129 and 49 CFR Part 71 to 78.

6. NOTES

6.1 Intended use and description.

6.1.1 Intended use. The switch is intended to be used to open or close electrical circuits.

6.1.2 Description. The switch is an explosive actuated transfer switch consisting of one normally open circuit and one normally closed circuit. The circuits are closed and opened, respectively, when a direct current of 230 milliamperes is applied to the initiation circuit.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

b. Required level of preservation and packaging

c. Required level of packing

d. Any exceptions to this specification.

6.2.1 Additional samples. Additional samples required because of failure of any sample(s) to pass the prescribed inspections shall be provided and inspected at the expense of the supplier.

6.3 Definitions. For the purpose of this specification, the following definitions have been established.

6.3.1 Unit condition.

6.3.1.1 Operating. The condition of the switch during missile operation.

6.3.1.2 Standby. Standby is the condition of the switch when aboard ship and is assembled into the end item.

6.4 Preparation for delivery criteria. Criteria for use of the proper level of preservation, packaging, and packing shall be as specified in FED-STD-102.

6.5 General safety precautions. The loading, assembly, and handling of explosives, ammunition components, fuzes, detonators, primers, tracers, boosters, pyrotechnics, etc., and subassemblies thereof, involve hazardous operations and therefore require suitable explosives safety precautions. Use of this specification shall not be construed as to relieve the contractor or manufacturer of responsibility for the safety of his operations. Listed below are the minimum provisions which contractor or manufacturer (loader) of the above items should observe in order to fulfill his responsibility for safety. At Bureau of Naval Weapons, Navy Department, and other Government plants, these provisions are mandatory. Such other warnings and precautions as are pertinent to the operational effectiveness or safety during use or loading of the specified item, are included in the detail provisions of the specification.

6.5.1 All loading operations should be conducted in a neat and orderly manner.

6.5.2 Safe equipment and methods should be utilized for transporting and handling explosives and loaded parts. Where required, remote control barricaded handling equipment shall be used for explosives operations, such as milling, pouring, weighing, charging, sifting, drying, pressing, casting, crimping, etc.

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:12Z
Check the source to verify that this is the current version before use.

6.5.3 Personnel handling detonators, primers, delay elements, lead-ins, boosters, and related parts which affect functioning, should insofar as practicable, avoid using bare fingers or improper equipment in order to prevent damage, corrosion, or deterioration from perspiration or other contaminating deposits.

6.5.4 The exposure of explosive material and related parts should be so controlled as to minimize the absorption of moisture from the atmosphere or other sources during loading and handling operations.

6.5.5 All explosives and completely or partially loaded items should be stored in suitable storage magazines located in accordance with the American Table of Distances (ATD) or other applicable safety standards; and while in process, in safety lockers or chests if in loading rooms, or in adequate ready or service magazines, located in accordance with intraplant distances when outside of loading rooms. For Navy explosives loading plants, the provisions of the Armed Services Explosives Safety Board covering quantity-distance relations for explosives, shall apply.

6.5.6 Proper care should be exercised at all times to protect personnel from accidents, fires or explosions, and to limit damage to equipment and loading areas. In this connection, the following precautionary measures should be observed.

6.5.6.1 Employ properly proportioned and properly located protective barricades, screens, or shields at all required points.

6.5.6.2 Keep only minimum limited quantities of explosives and completed or partially loaded parts present at each stage of operation.

6.5.6.3 Keep explosives and explosive parts in approved covered receptacles with covers in place when material is not being taken out of or put into the receptacle. Where necessary, receptacles should be conductive to ground electrostatic charges.

6.5.6.4 Protect operations from electrostatic charges by effectively grounding all machinery, equipment, and fixtures, and where necessary, employ suitable grounded conductive coverings for floors, work benches, and tables, and workers' conductive shoes. Workers' clothing of a type to minimize the accumulation of static charges should be employed. Fabrics such as silk and nylon, which promote static generation, should be avoided. Additional grounding devices such as grounded bracelets for workers should be employed where operations are conducted with items which are usually sensitive to initiation by static electricity. Such items include initiating explosives, tracer mixtures and low-energy type electric primers, detonators, and squibs. The latter types of items should have the free ends of lead wires bared and twisted together, and be packed in relatively small groups wrapped in bare non-insulated aluminum foil or other uncoated metal foil. During assembly and processing operations, such sensitive

Source: https://assist.dla.mil -- Downloaded: 202640-23T07:12Z
Check the source to verify that this is the current version before use.

electric items should be short circuited by clips or other devices until installed with safety shunt in the final device. Additional precautions for these items should include mechanical shielding to contain or deflect fragments and blast, also electrical shielding of these items from induced electric currents generated by sources such as lightning, static, radiations from communications apparatus, radar, or high frequency hearing apparatus, etc. Where necessary for safety, humidity of work rooms should be increased, as required, to lessen electrostatic effects without excessive moisture absorption.

6.5.6.5 Protect all explosive operations from effects of electric current originating from equipment such as soldering irons, heaters, switches, wiring, motors, lights, test instruments, etc., by suitable insulation, grounding, separation or shielding. Such electric sources may initiate explosives by heat, sparks, arcs, or due to completing an electric circuit through an electric primer, detonator, or squib. Circuits may be inadvertently completed, for example, from a defective electronic soldering iron through a ground contact. All electric type primers, detonators, or squibs provided with wire leads should have the free ends of the wires bared and twisted together to short circuit each unit, except when in process of assembly into a finished item. Where practicable, removable short circuiting clips, or other devices, should be employed during manufacturing operations involving electric primers, detonators, or squibs.

6.5.6.6 Enforce, where necessary, the wearing of suitable safety footwear, gloves, goggles, respirators, and impregnated garments to protect personnel against burns, poisoning, and associated industrial hazards.

6.5.6.7 Allow no fires or exposed electrical or other sparking equipment, and little or no flammable material to be present in loading, handling, and storage spaces. Enforce proper "Match" and "No Smoking" rules where necessary.

6.5.6.8 Enforce good housekeeping and maintain effective policing, inspection and supervisory methods throughout the loading area and surroundings. Employ effective cleaning methods periodically to minimize the accumulation of explosives or explosive dust and other contamination upon, and assure its removal from floors, walls, ceilings, ledges, tables, benches, piping, and equipment and the items being loaded: also, clean up any spilled material immediately.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION
MIL-S-82489(OS) SWITCH, DRIVER MARK 76 MOD 0

ORGANIZATION *(Of submitter)*

CITY AND STATE

CONTRACT NO.

QUANTITY OF ITEMS PROCURED.

DOLLAR AMOUNT
$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING:

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*

DATE

FORM 1426
1 APR 63

C-8279

Source: https://assist.dla.mil -- Downloaded: 202640-23T07:12Z
Check the source to verify that this is the current version before use.