METRIC
MIL-DTL-38999/22J
w/AMENDMENT 1
27 July 2021
SUPERSEDING
MIL-DTL-38999/22J
18 February 2015

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, RECEPTACLE, THREADED, DUMMY STOWAGE, SERIES III, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-38999.

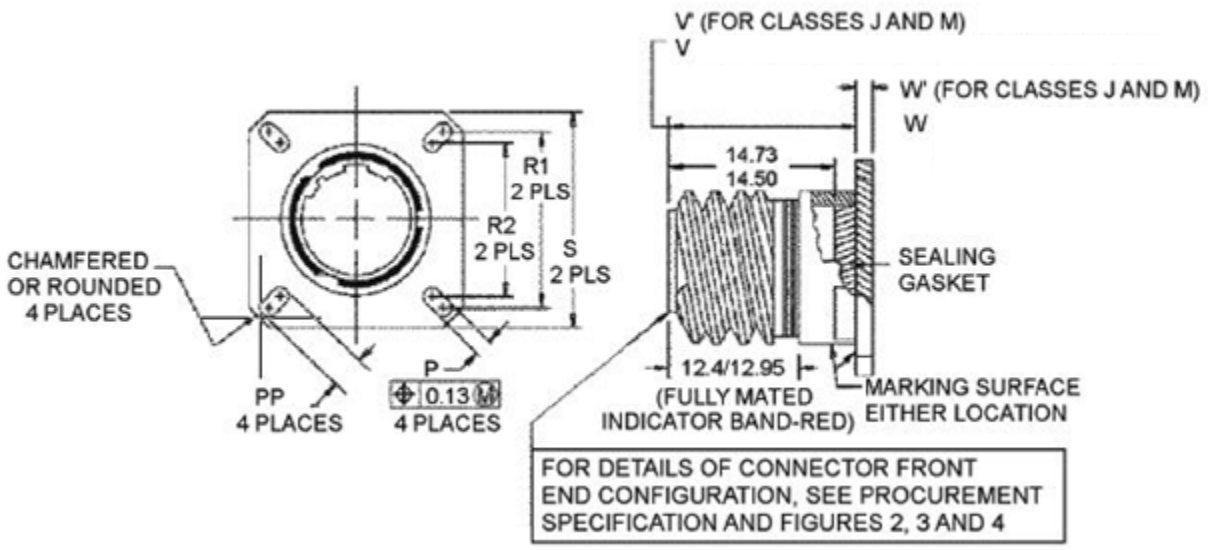


FIGURE 1. Dummy stowage receptacle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:43Z
Check the source to verify that this is the current version before use.

Dimensions					
Shell size	Shell size code	P ± .20	PP ± .20	R1 (see note 4)	R2 (see note 5)
9	A (see note 8)	3.25 (.128)	5.49 (.216)	18.26 (.719)	15.09 (.594)
9	A1 (see note 6)	3.25 (.128)	5.49 (.216)	18.26 (.719)	15.09 (.594)
9	A2 (see note 7)	3.25 (.128)	5.49 (.216)	18.26 (.719)	15.09 (.594)
11	B	3.25 (.128)	4.93 (.194)	20.62 (.812)	18.26 (.719)
13	C	3.25 (.128)	4.93 (.194)	23.01 (.906)	20.62 (.812)
15	D	3.25 (.128)	4.39 (.173)	24.61 (.969)	23.01 (.906)
17	E	3.25 (.128)	4.93 (.194)	26.97 (1.062)	24.61 (.969)
19	F	3.25 (.128)	4.93 (.194)	29.36 (1.156)	26.97 (1.062)
21	G	3.25 (.128)	4.93 (.194)	31.75 (1.250)	29.36 (1.156)
23	H	3.91 (.154)	6.15 (.242)	34.93 (1.375)	31.75 (1.250)
25	J	3.91 (.154)	6.15 (.242)	38.10 (1.500)	34.93 (1.375)

FIGURE 1. Dummy stowage receptacle – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:43Z
Check the source to verify that this is the current version before use.


Dimensions						
Shell size	Shell size code	S ± .3	V + 0.00 - 0.13	V' + 1.4 - 0.0	W ± .3	W'
9	A (see note 8)	23.8 (.937)	20.83 (.820)	19.5 (.768)	2.5 (.098)	3.65 (.144) 2.2 (.087)
9	A1 (see note 6)	23.8 (.937)	20.83 (.820)	19.5 (.768)	2.5 (.098)	3.65 / 2.2 (.144 /.087)
9	A2 (see note 7)	23.8 (.937)	20.83 (.820)	19.5 (.768)	2.5 (.098)	3.65 / 2.2 (.144 /.087)
11	B	26.2 (1.031)	20.83 (.820)	19.5 (.768)	2.5 (.098)	3.65 / 2.2 (.144 /.087)
13	C	28.6 (1.126)	20.83 (.820)	19.5 (.768)	2.5 (.098)	3.65 / 2.2 (.144 /.087)
15	D	31.0 (1.220)	20.83 (.820)	19.5 (.768)	2.5 (.098)	3.65 / 2.2 (.144 /.087)
17	E	33.3 (1.311)	20.83 (.820)	19.5 (.768)	2.5 (.098)	3.65 / 2.2 (.144 /.087)
19	F	36.5 (1.437)	20.83 (.820)	19.5 (.768)	2.5 (.098)	3.65 / 2.2 (.144 /.087)
21	G	39.7 (1.563)	20.07 (.790)	18.7 (.736)	3.2 (.126)	4.35 / 2.9 (.171 / .114)
23	H	42.9 (1.689)	20.07 (.790)	18.7 (.736)	3.2 (.126)	4.35 / 2.9 (.171 / .114)
25	J	46.0 (1.811)	20.07 (.790)	18.7 (.736)	3.2 (.126)	4.35 / 2.9 (.171 / .114)

NOTES:

1. Dimensions are in millimeters. Inch equivalents are given for information only.
2. Flange is solid.
3. Dummy receptacles are used when unmated plugs must be protected.
4. Dimensions required for intermountability with front or rear mounting series I.
5. Dimensions required for intermountability with front mounting series II.
6. Shell size code A1 is for use with size 9 plug mating key polarizations C, E and N, only.
7. Shell size code A2 is for use with size 9 plug mating key polarizations A, B and D, only.
8. Shell size code A (inactive for new design) is for use with legacy systems with size 9 plug mating key polarizations A, B, C, D, E and N.
9. Dimensions V' and W' are for classes J and M, only. Dimensions V and W are for all other classes.

FIGURE 1. Dummy stowage receptacle – Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:43Z
Check the source to verify that this is the current version before use.

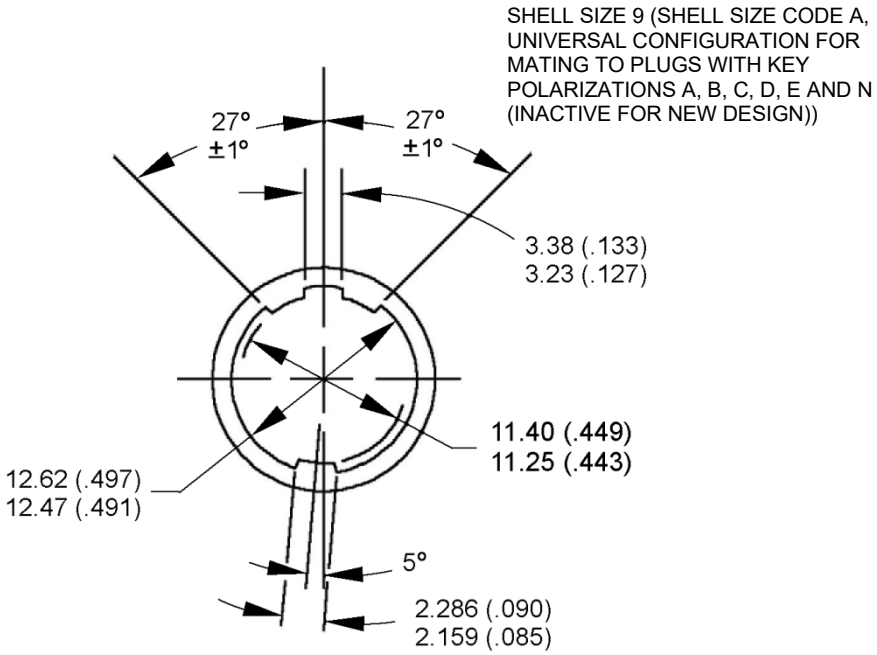

SHELL SIZE 9, SHELL SIZE CODE A

FIGURE 2. Dummy stowage receptacle, keyway arrangements (shell size 9).


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:43Z
Check the source to verify that this is the current version before use.

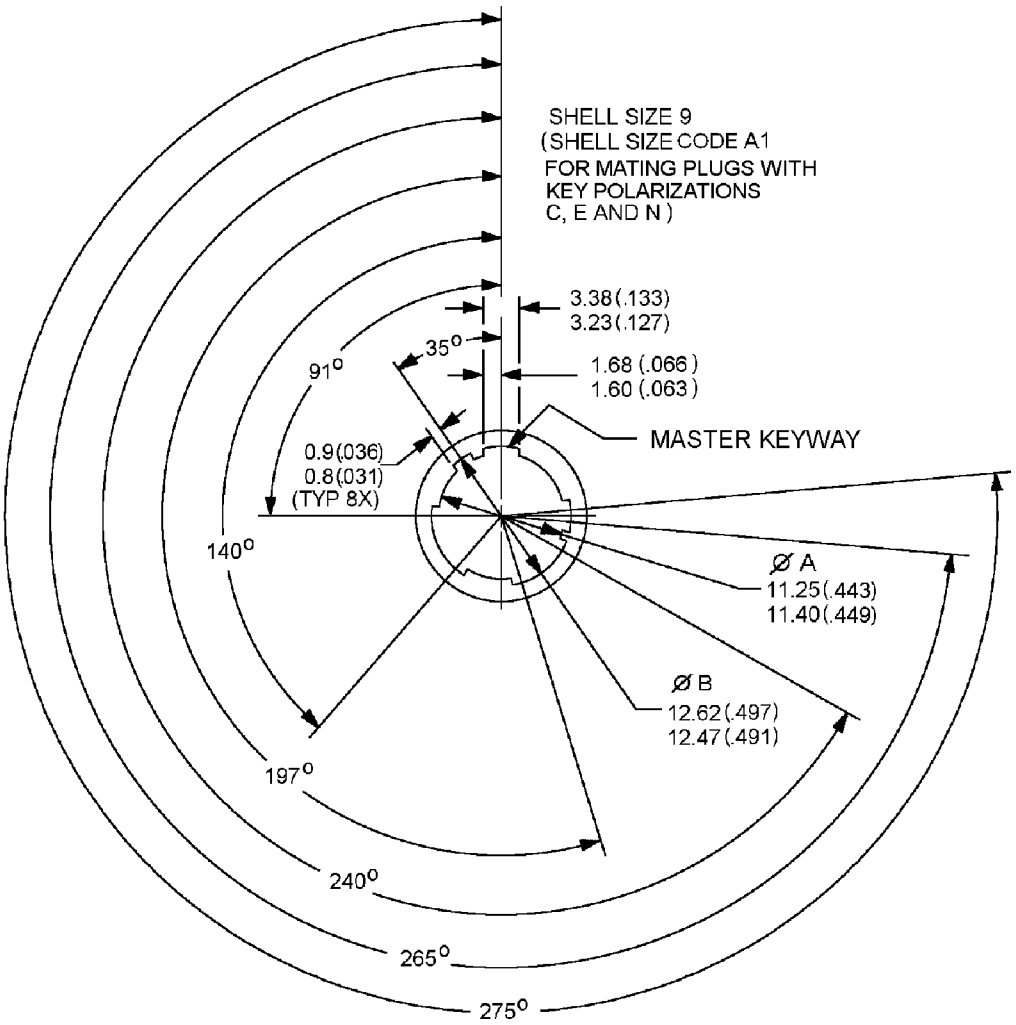

SHELL SIZE 9, SHELL SIZE CODE A1

FIGURE 2. Dummy stowage receptacle, keyway arrangements (shell size 9). – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:43Z
Check the source to verify that this is the current version before use.

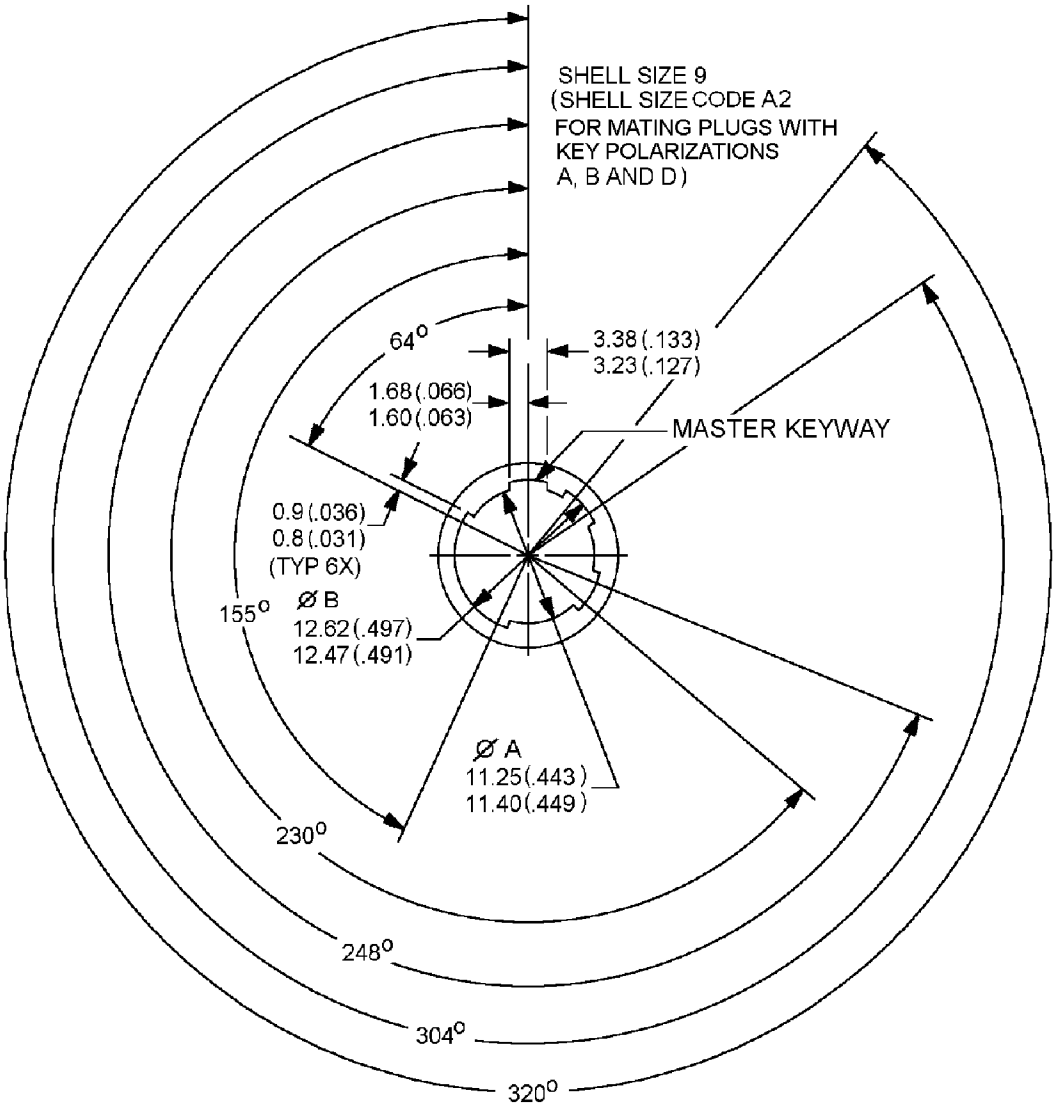


SHELL SIZE 9, SHELL SIZE CODE A2

NOTES:
1. Dimensions are in millimeters.
2. Inch equivalents are given for information only.

FIGURE 2. Dummy stowage receptacle, keyway arrangements (shell size 9) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:43Z
Check the source to verify that this is the current version before use.

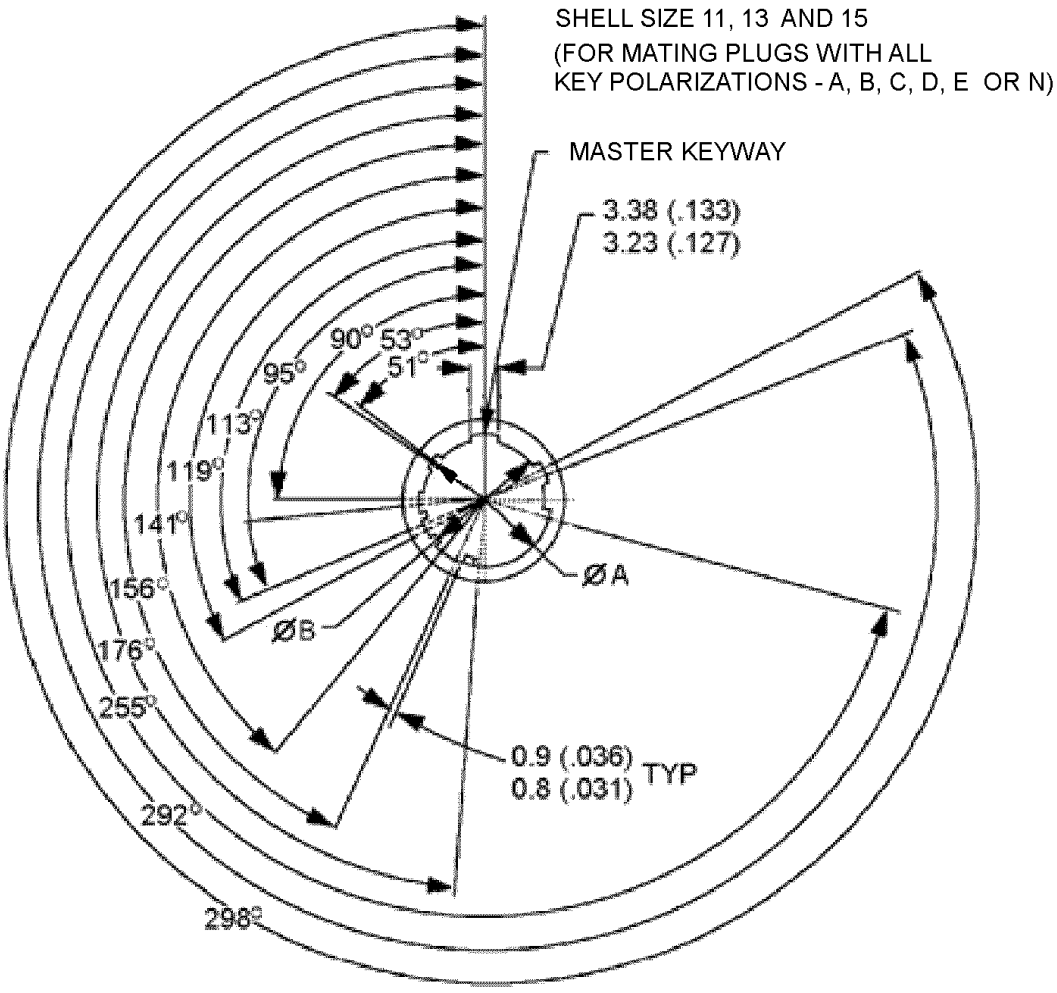

SHELL SIZES 11, 13 AND 15


Shell size	Shell size code	A dia	B dia
11	B	15.88/15.60 (.625/.614)	14.66/14.45 (.577/.569)
13	C	19.66/19.38 (.774/.763)	17.50/17.30 (.689/.681)
15	D	22.84/22.56 (.899/.888)	20.65/20.44 (.813/.805)

NOTES:

1. Dimensions are in millimeters.
2. Inch equivalents are given for information only.

FIGURE 3. Dummy stowage receptacle, keyway arrangement (shell sizes 11, 13 and 15).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:43Z
Check the source to verify that this is the current version before use.

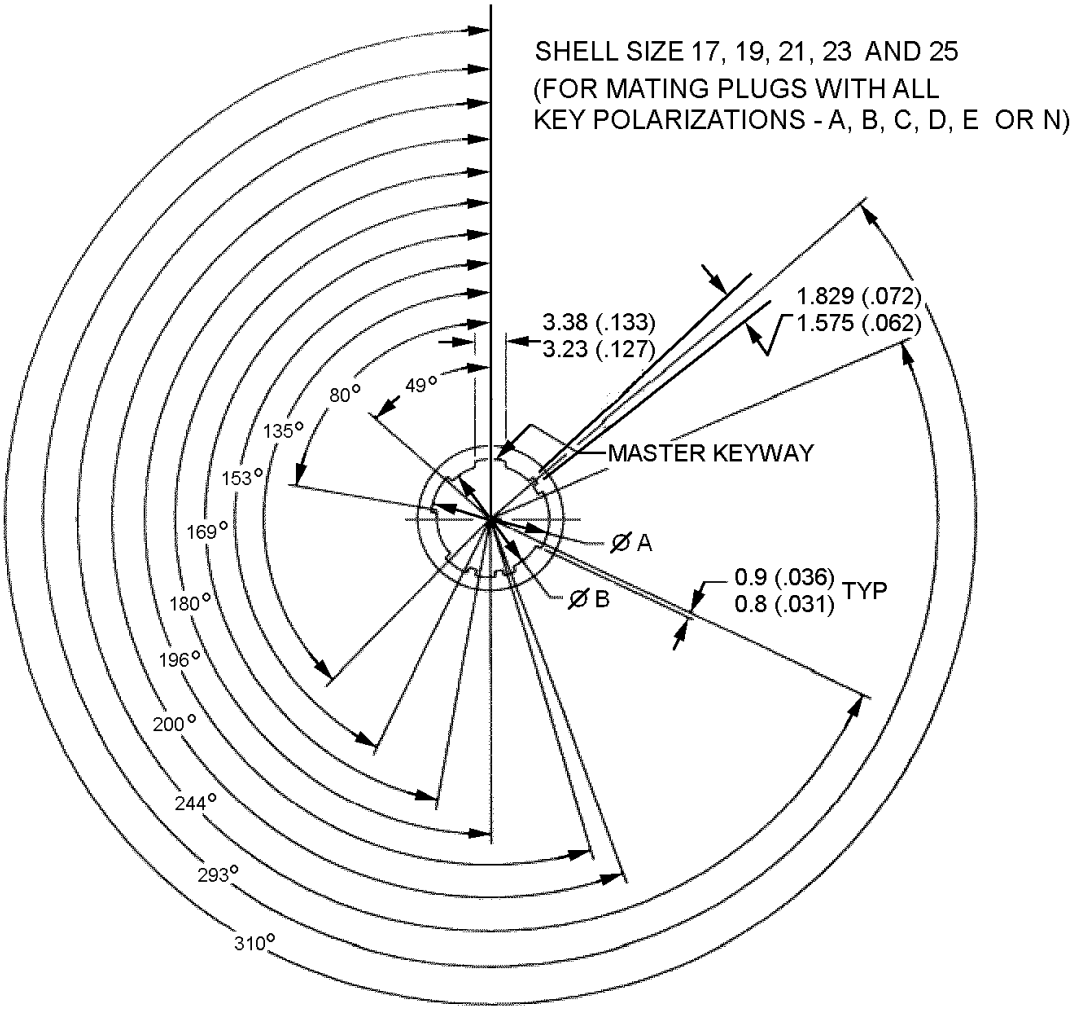

SHELL SIZES 17, 19, 21, 23 AND 25

Shell size	Shell size code	A dia	B dia
17	E	26.01/25.73 (1.024/1.013)	23.85/23.64 (.939/.930)
19	F	28.63/28.40 (1.127/1.118)	26.55/26.31 (1.045/1.036)
21	G	31.85/31.57 (1.254/1.243)	29.70/29.49 (1.169/1.161)
23	H	35.03/34.75 (1.379/1.368)	32.85/32.66 (1.293/1.286)
25	J	38.20/37.92 (1.504/1.493)	36.00/35.84 (1.417/1.411)

FIGURE 4. Dummy stowage receptacle, keyway arrangement (shell sizes 17, 19, 21, 23 and 25).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:43Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figures 1 thru 4. Interface dimensions shall conform to MIL-DTL-38999, except as noted.

This dummy stowage receptacle (DSR) mates with qualified plugs in accordance with MIL-DTL-38999/26, MIL-DTL-38999/29, MIL-DTL-38999/30, and MIL-DTL-38999/31.

Air leakage: Testing shall be in accordance with EIA-364-02, except the minimum period of measurement shall be 10 seconds. The air leakage rate shall be no greater than 1 atmospheric cubic inch per hour (4.55×10^{-3} cm^3/s) Stowage receptacles shall be mated to connectors having either contacts or inserts removed so that a pressure of 10 $lbft/in^2$ ($.703\ Kg/cm^2$) can be applied against the insides of the stowage receptacles.

Qualification **(general)**: Qualification shall be in accordance with MIL-DTL-38999, conducted on two samples of each shell size, except only the following sequence of tests shall be required:

Examination of product
Coupling torque
Dynamic salt spray (corrosion)
Air leakage (see requirement)
Visual and mechanical

Qualification (classes J and M only): Qualification (general) requirements shall apply. The following additional tests shall be required:

Temperature cycling
Hydrolytic stability


Group A sampling inspection. Sampling for group A inspection shall be as specified in table I.

TABLE I. Group A sampling plan.

Lot size	Sampling size
1 to 13	100 percent
14 to 150	13 units
151 to 280	20 units
281 to 500	29 units
501 to 1,200	34 units
1,201 to 3,200	42 units
3,201 and up	54 units

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:43Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN) example:

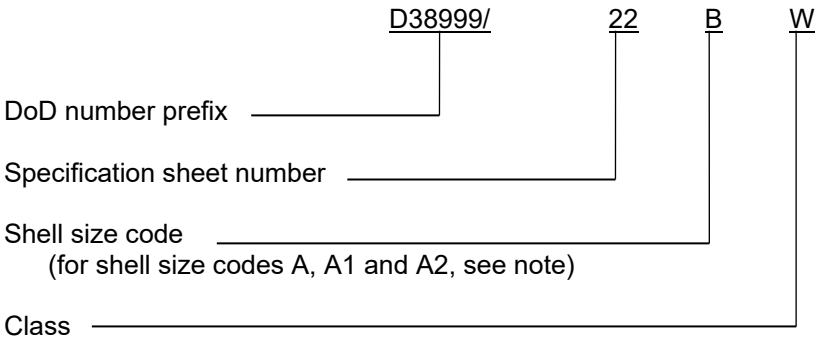

NOTE: Shell size codes A, A1 and A2 for shell size 9 only:

- Shell size code A is a universal configuration for use with plugs with mating key polarizations A, B, C, D, E and N.
- Shell size code A1 is for use with plugs with mating key polarizations C, E or N.
- Shell size code A2 is for use with plugs with mating key polarizations A, B or D.

Class F is not for Navy use. Class F is inactive for use in Air Force new design.

Shell size code A (shell size 9) is inactive for new design. Use shell size codes A1 or A2 for new design.

NOTE: The term PIN is equivalent to the term (part number, identification number, and type designator) which was previously used in this specification.

Application note:

1. Shell size 9, shell size code A (universal configuration), is not recommended for blind mate applications due to the possibility for misalignment between the DSR keyways and the plug keys. Misalignment can potentially damage plug EMI bands.

Change effectivity. Unless otherwise specified by the preparing activity and/or the qualifying activity, all changes from the previous revision of this specification sheet shall become effective within 90 days of the date of publication of the latest revision. If unable to implement changes within the 90 day time period, the manufacturer or value added distributor shall notify the qualifying activity. The qualifying activity shall determine if an extension may be granted.

Disposition of stock. Unless otherwise specified by the qualifying activity and coordinated with the preparing activity, qualified manufacturers and their selling agents or distributors may continue to ship stowage receptacles which were manufactured in accordance with the previous revision of this specification sheet for a period of 18 months from the date of the latest revision, provided that form, fit and function are not affected.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:43Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

MIL-DTL-38999/26
MIL-DTL-38999/29
MIL-DTL-38999/30
MIL-DTL-38999/31
EIA-364-02

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2021-070)

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:43Z
Check the source to verify that this is the current version before use.