METRIC

MIL-C-38999/28E
28 June 1990
SUPERSEDING
MIL-C-38999/28D
13 November 1987

MILITARY SPECIFICATION SHEET

Ⓔ CONNECTORS, ELECTRICAL, CIRCULAR, NUT, HEXAGON, CONNECTOR MOUNTING, SERIES III AND IV, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

Ⓔ The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-38999.

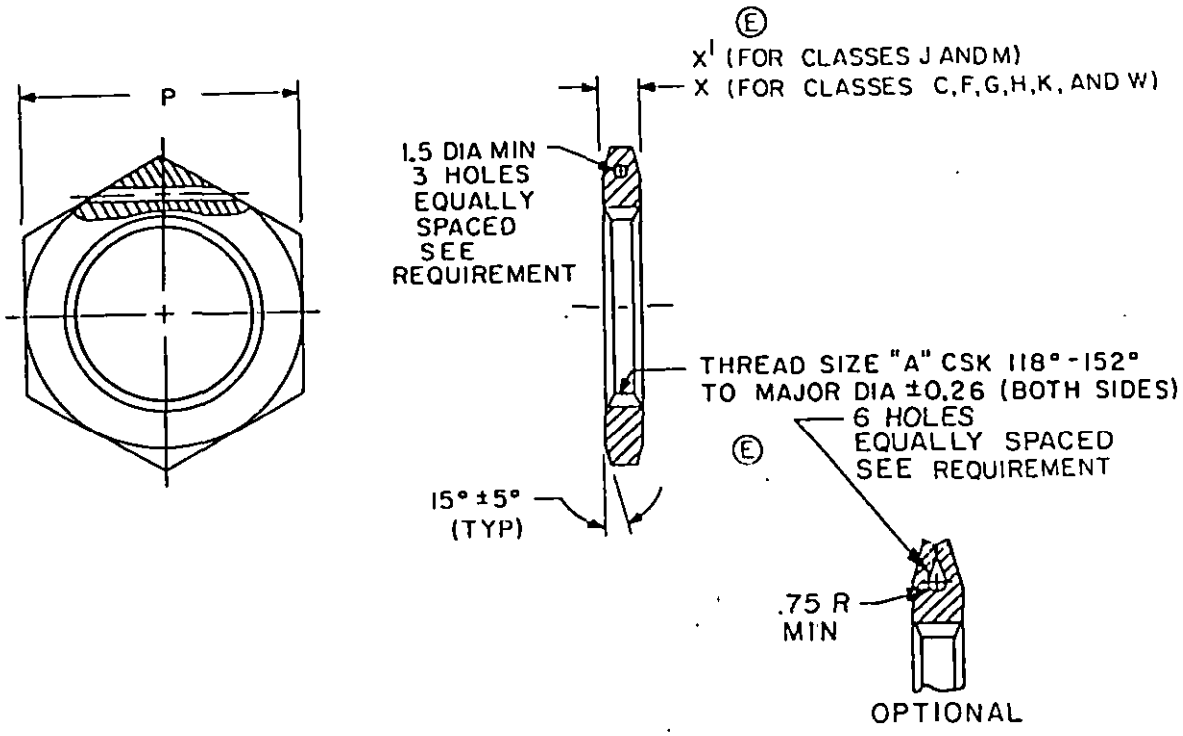


FIGURE 1. Nut hexagon.

Ⓔ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:47Z
Check the source to verify that this is the current version before use.

Dash number	Shell size		A thread size	P hex	(E) X' +.29 -.00	(E) X +.45 -.00
	Series III	Series IV				
1	9	---	M17X1-6H 1/	24.00 21.82	4.54	3.17
2	11	---	M20X1-6H 2/	27.00 24.99	4.54	3.17
3	13	11	M25X1-6H	32.00 29.77	4.54	3.17
4	15	13	M28X1-6H	36.00 32.91	4.54	3.17
5	---	15	M31X1-6H	41.00 39.26	4.54	3.17
6	17	---	M32X1-6H	37.00 36.12	4.54	3.17
7	---	17	M34X1-6H	41.00 39.25	4.54	3.17
8	19	---	M35X1-6H	41.00 39.25	4.54	3.17
9	21	19	M38X1-6H	46.00 42.47	4.54	3.17
10	23	21	M41X1-6H	50.00 45.61	4.54	3.17
11	25	23	M44X1-6H	51.23 49.25	4.54	3.17
12	---	25	M47X1-6H	55.00 53.54	4.54	3.17

1/ Modified minor diameter: 16.04 - 16.15

2/ Modified minor diameter: 19.07 - 19.15.

NOTES:
1. Dimensions are in millimeters.
2. Remove all burrs and sharp edges.

FIGURE 1. Nut, hexagon - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:47Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material: See table I.

Finish: See table I and MIL-C-38999.

Applicable connectors: MIL-C-38999, series III and IV.

Safety wire hole pull out:

Safety wire holes shall not pull out when safety wire NI-CU alloy (MONEL) (UNS N04400) or NI-CR alloy (INCONEL) (UNS N06600) 0.51 mm diameter in accordance with MS20995 is threaded through a hole and a pull of 133.5 Newton minimum is applied. Three pulls shall be made, one parallel with axis of nut in each direction and one perpendicular to axis of nut.


QUALIFICATION:

Examination of product.

Safety wire hole pull out (see requirements).

Salt spray (corrosion).

(E) Part or Identifying Number (PIN) example:

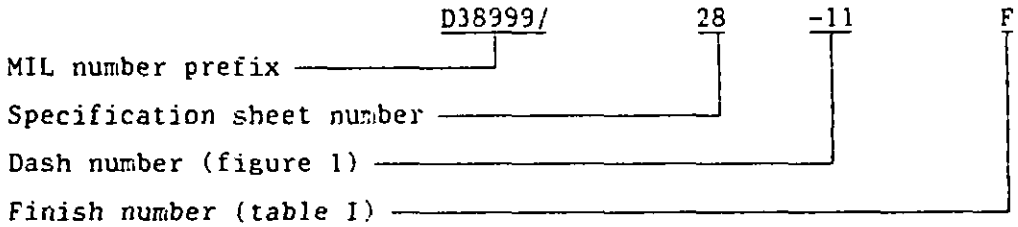

(E) NOTE: The term Part or Identifying Number (PIN) is equivalent to the term part number, identification number, and type designator which was previously used in this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:47Z
Check the source to verify that this is the current version before use.

(E) TABLE I. Material and finish. 1/

Material	Finish
Aluminum: QQ-A-200/8, COND T-6	C
QQ-A-200/3, COND T-351 QQ-A-225/5, COND T-4	F, G
QQ-A-225/8, COND T-6	W
Corrosion resistant steel: 2/ ASTM A 582, types 303 or 303Se	K, H
Resin with or without filler	J, M

1/ See corresponding MIL-C-38999 class designator.
2/ Shall be cleaned, descaled and passivated in accordance with ASTM A 380.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
(E) NASA - NA

Review activities:
Army - AR, MI
Navy - EC, MC, SH
Air Force - 11, 15, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3740-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:47Z
Check the source to verify that this is the current version before use.