METRIC

MIL-C-38999/31B
AMENDMENT 1
27 March 1998

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, PLUG, LANYARD RELEASE, FAIL-SAFE REMOVABLE CRIMP CONTACTS, PINS, SERIES III, SHELL SIZE 25, METRIC

This amendment forms a part of MIL-C-38999/31B, dated 10 June 1992, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 3

Add new figure 3 as follows:

"

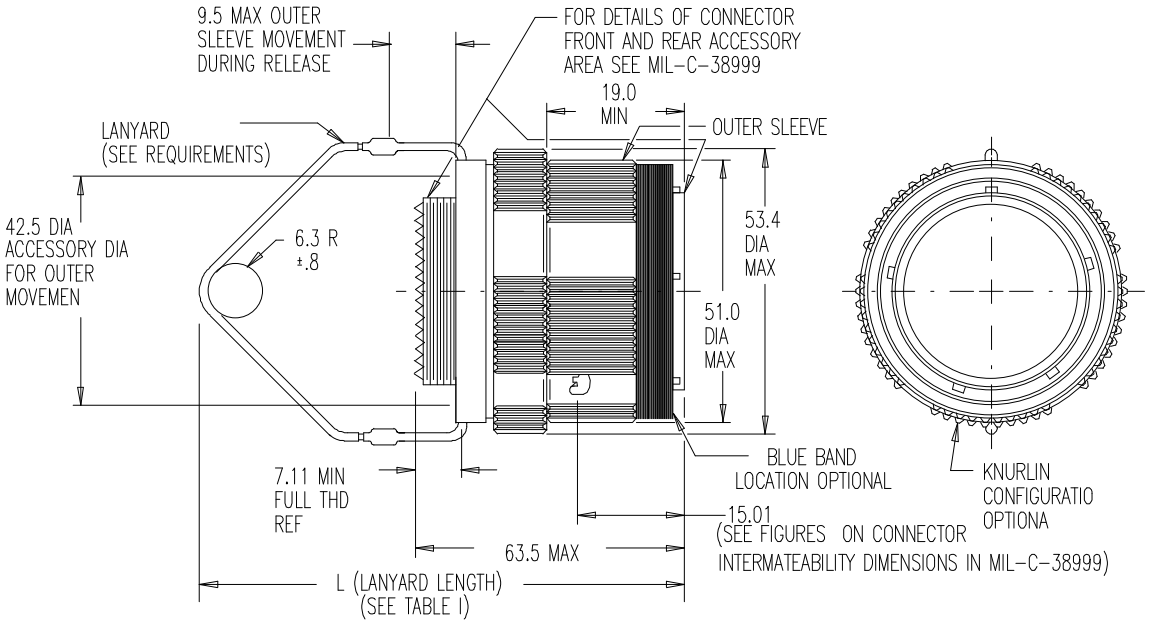

NOTES:
1. Dimensions are in millimeters.
2. Inch-pound equivalents are given for information only.
3. Polarization position N is shown.
4. EMI grounding feature required on this connector.
5. The Government may stock, store, and issue this configuration.
6. This part may be used as a replacement for type I.

FIGURE 3. Plug, class J and M, type 3. "

Following Lanyard "b." add: "c. class J and M connectors, 2.54 mm nominal diameter, kevlar cord capable of withstanding 840 newtons pull test after assembly with connector."

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:48Z
Check the source to verify that this is the current version before use.

PAGE 4

Following " For figure 2", add new PIN for figure 3:

"For figure 3:

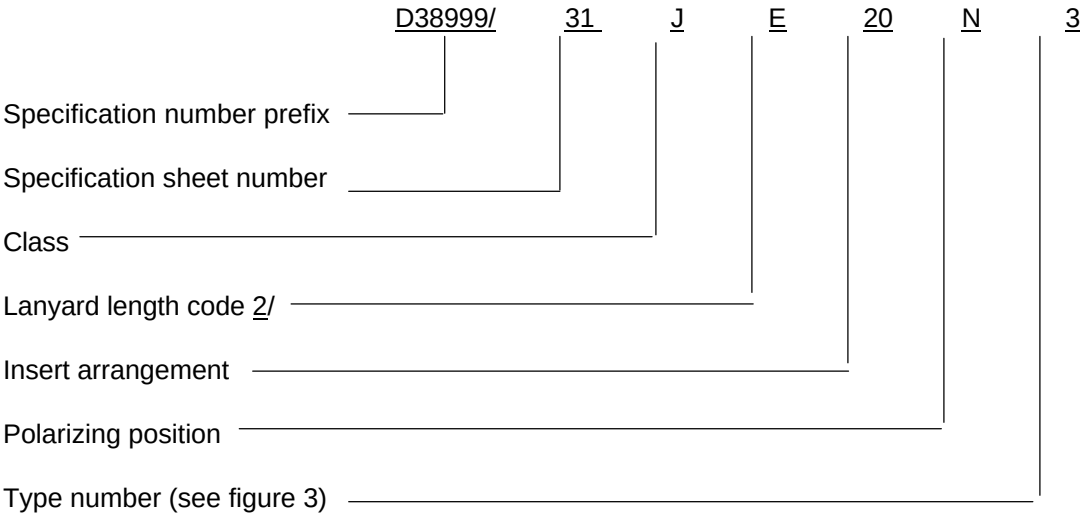

"

PAGE 5

Following Table I, add: "External Bending moment: Wired connectors shall meet the external bending moment requirements of MIL-C-38999 with the following exceptions: size 25 shall be 28.3 newton-meters."

"QPL evaluating activity including class J and M: Defense Supply Center Columbus, DSCC-V, 3990 East Broad Street, Columbus, Ohio 43216-5000"

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85

Preparing activity:
DLA - CC

(Project 5935-4116)

Review activities:
Army - MI
Navy - EC, MC, OS
Air Force - 11, 19, 80, 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:48Z
Check the source to verify that this is the current version before use.