METRIC T
DOD-C-38999/32A
5 October 1984
SUPERSEDING
DOD-C-38999/32
15 July 1983

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, COVER, ELECTRICAL CONNECTOR, PROTECTIVE, PLUG, THREADED COUPLING (MIL-C-38999 SERIES III), METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification sheet and the latest issue of MIL-C-38999.


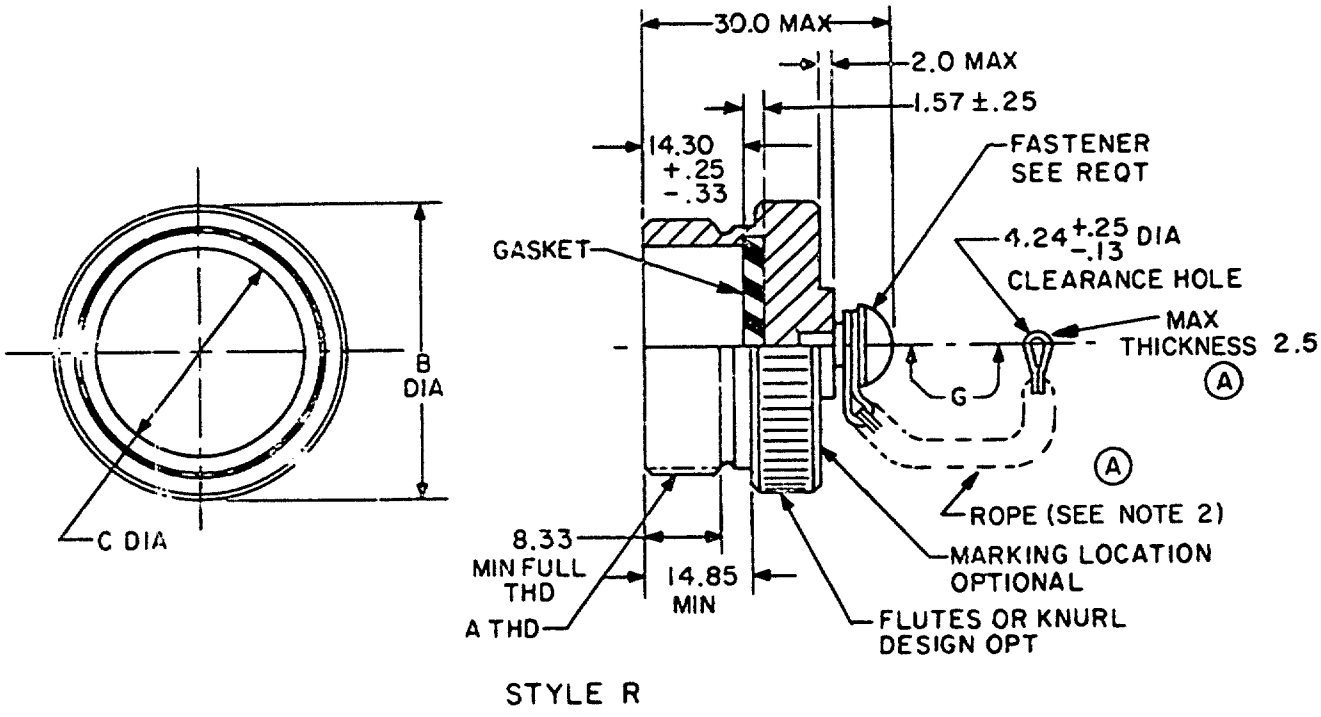


FIGURE 1. Protective cover, plug.

Ⓐ denotes changes

Source: https://assist.dla.mil - Downloaded: 2026-10-21T15:49Z
Check the source to verify that this is the current version before use.

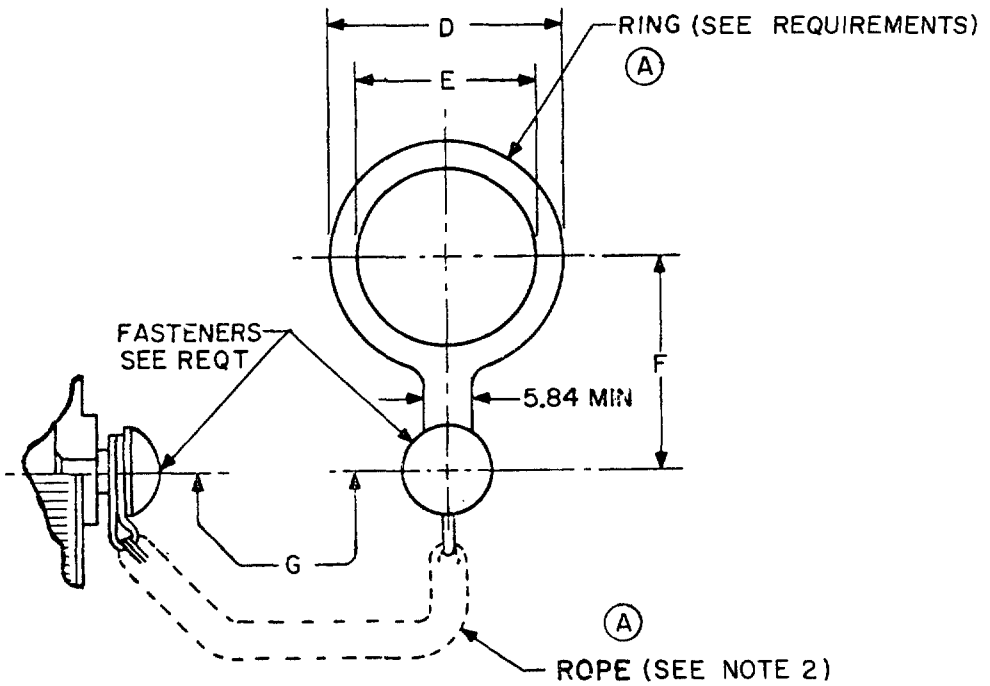

STYLE N

TABLE I. Protective cover dimensions. (A)

Shell size	A THD-2A	B max dia	C +.00 dia-.15	D max dia	E min dia	F	G +13.0 -7.0
9	.6250-0.1P-0.3L-TS	23.0	12.50	24.0	13.0	24.00 14.50	127.00
11	.7500- "	26.0	15.75	27.0	18.0	20.50 18.00	"
13	.8750- "	31.0	19.53	30.0	20.0	27.00 20.00	"
15	1.0000- "	33.0	22.71	31.0	23.0	22.50 18.00	"
17	1.1875- "	37.0	25.88	37.0	26.0	30.50 23.50	"
19	1.2500- "	40.0	28.55	40.0	29.0	31.50 25.00	"
21	1.3750- "	44.0	31.72	44.0	32.0	33.00 26.50	"
23	1.5000- "	46.0	34.90	46.0	34.0	34.00 27.50	"
25	1.6250-0.1P-0.3L-TS	50.0	38.07	49.0	39.0	38.00 30.00	127.00

(A) NOTES:
1. Dimensions are in millimeters, except "A threads" which are in inches.
2. Method of attachment to cover and or ring is optional.

FIGURE 1. Protective cover, plug - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material:

Cover - Impact extruded or machined aluminum.

Gasket - Silicone elastomer.

Ring - Stainless steel, passivated, 1.020 maximum thickness.

Rope - Insulated stainless steel, passivated.

Insulation shall withstand 200°C environment.

Ⓐ Fastener - Stainless steel, passivated.
Option: Aluminum integral to cover.

ⒶFinish: Olive drab cadmium plate (see MIL-C-38999, class W).

Applicable connectors: MIL-C-38999, series III.

Gasket shall be bonded to cover, or mechanically retained.

Rope shall rotate freely on fastener.

Fastener tensile strength: Both axial and longitudinal directions shall be 25 pounds. The load shall be applied to the end of the rope.

QUALIFICATION:

Examination of product.

Mating and unmating forces.

Moisture resistance.

Salt spray (corrosion).

Fastener tensile strength (see requirement).

Altitude immersion.

Part number example:

Ⓐ

D38999/32	W	15	R
Specification sheet number	Finish (see requirement)	Shell size (see table I)	Style R - rope N - with rope and ring

Source: https://assist.dla.mil - Downloaded: 2026-10-21T15:49Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA - ES

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3418-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:49Z
Check the source to verify that this is the current version before use.