METRIC


MIL-C-38999/32B
07 May 1990
SUPERSEDING
MIL-C-38999/32A
5 October 1984

MILITARY SPECIFICATION SHEET

Ⓑ CONNECTORS, ELECTRICAL, CIRCULAR,
COVER, PROTECTIVE, PLUG
(MIL-C-38999 SERIES III), METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

Ⓑ The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-38999.

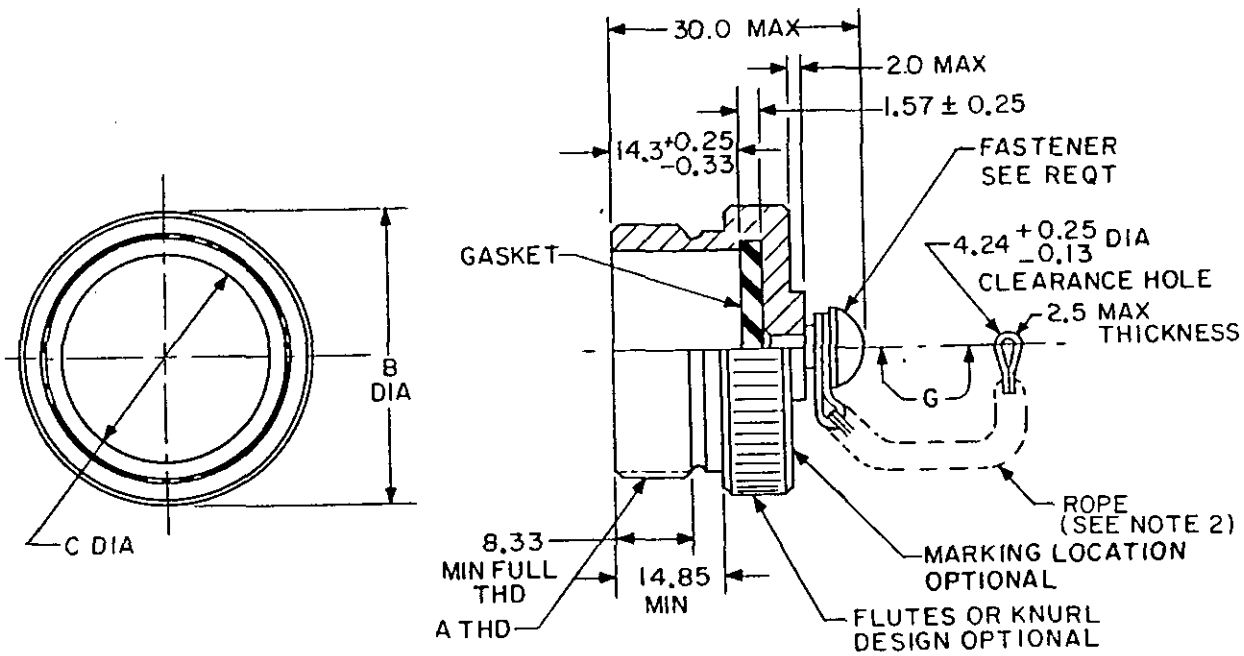


STYLE R

Ⓑ FIGURE 1. Protective cover, plug, classes G, J, M, and W.

Ⓑ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:49Z
Check the source to verify that this is the current version before use.

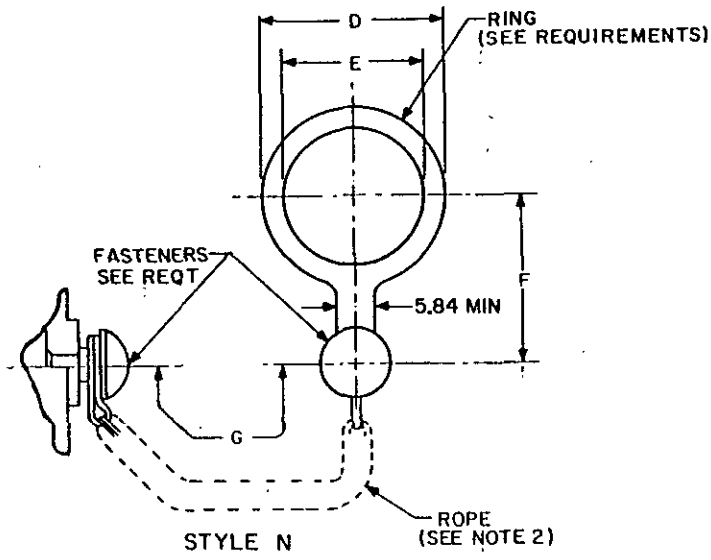

Dimensions							
Shell size	A THD-2A	B max dia	C +.00 dia -.15	D max dia	E min dia	F	G +13.0 -7.0
9	.6250-0.1P-0.3L-TS	23.0	12.50	24.0	13.0	24.00 14.50	127.00
11	.7500-0.1P-0.3L-TS	26.0	15.75	27.0	18.0	20.50 18.00	127.00
13	.8750-0.1P-0.3L-TS	31.0	19.53	30.0	20.0	27.00 20.00	127.00
15	1.0000-0.1P-0.3L-TS	33.0	22.71	31.0	23.0	22.50 18.00	127.00
17	1.1875-0.1P-0.3L-TS	37.0	25.88	37.0	26.0	30.50 23.50	127.00
19	1.2500-0.1P-0.3L-TS	40.0	28.55	40.0	29.0	31.50 25.00	127.00
21	1.3750-0.1P-0.3L-TS	44.0	31.72	44.0	32.0	33.00 26.50	127.00
23	1.5000-0.1P-0.3L-TS	46.0	34.90	46.0	34.0	34.00 27.50	127.00
25	1.6250-0.1P-0.3L-TS	50.0	38.07	49.0	39.0	38.00 30.00	127.00

NOTES:
1. Dimensions are in millimeters, except "A threads" which are in inches.
2. Method of attachment to cover and or ring is optional.

Ⓑ FIGURE 1. Protective cover, plug, classes G, J, M, and W - continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material:

Ⓑ Cover - Classes G and W: Impact extruded or machined aluminum.
Classes J and M: High performance resin in accordance with MIL-C-38999

Gasket - Silicone elastomer.

Ⓑ Ring - Corrosion resistant steel, passivated, 1.020 maximum thickness.

Rope - Insulated stainless steel, passivated.

Insulation shall withstand 200°C environment.

Fastener - Stainless steel, passivated.
Option: Aluminum integral to cover.

Applicable connectors: MIL-C-38999, series III.

Gasket shall be bonded to cover, or mechanically retained.

Rope shall rotate freely on fastener.

Fastener tensile strength: Both axial and longitudinal directions shall be 25 pounds. The load shall be applied to the end of the rope.

QUALIFICATION:

Examination of product.

Mating and unmating forces.

Moisture resistance.

Salt spray (corrosion).

Fastener tensile strength (see requirement).

Altitude immersion.

Ⓑ For classes J and M also perform temperature cycling and hydrolytic stability .

Ⓑ Part or Identifying Number (PIN) example:

D38999/32	W	15	R
Specification sheet number	Class (see requirement)	Shell size	Style R - rope N - with rope and ring

Ⓑ NOTE: The term Part or Identifying Number (PIN) is equivalent to the term (part number, identification number, and type designator) which was previously used in this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:49Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
(B) NASA -NA

Review activities:
Army - MI
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3740-06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:49Z
Check the source to verify that this is the current version before use.