METRIC

MIL-DTL-38999/32D
30 May 2008
SUPERSEDING
MIL-DTL-38999/32C
11 June 2001

DETAIL SPECIFICATION SHEET

CONNECTOR, ELECTRICAL CIRCULAR, COVER, PROTECTIVE, PLUG, SERIES III, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-38999.

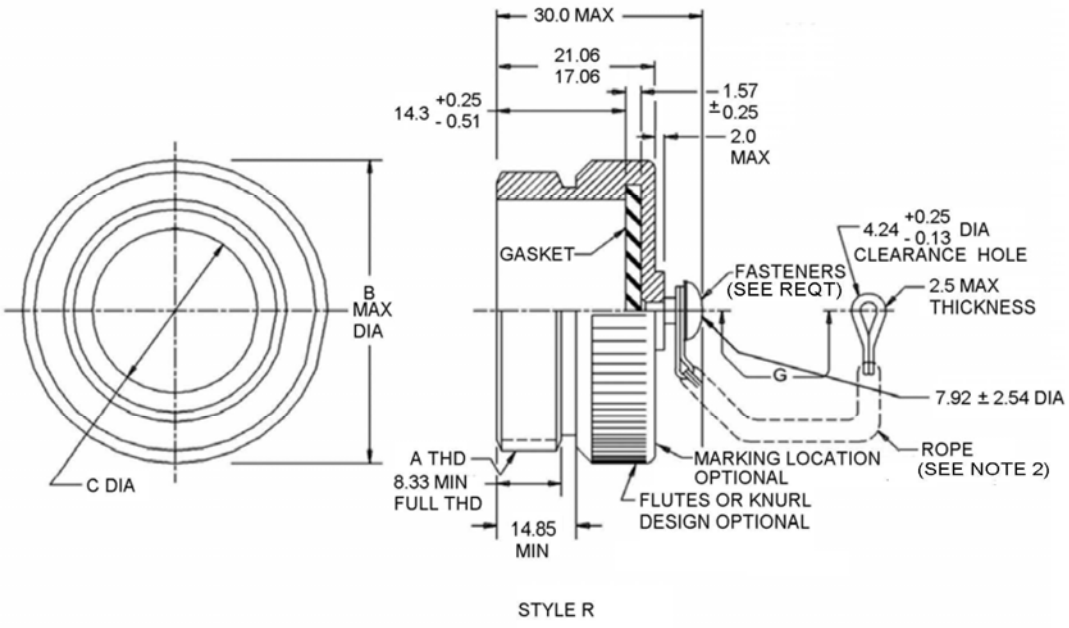


FIGURE 1. Protective cover, plug, all classes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:49Z
Check the source to verify that this is the current version before use.

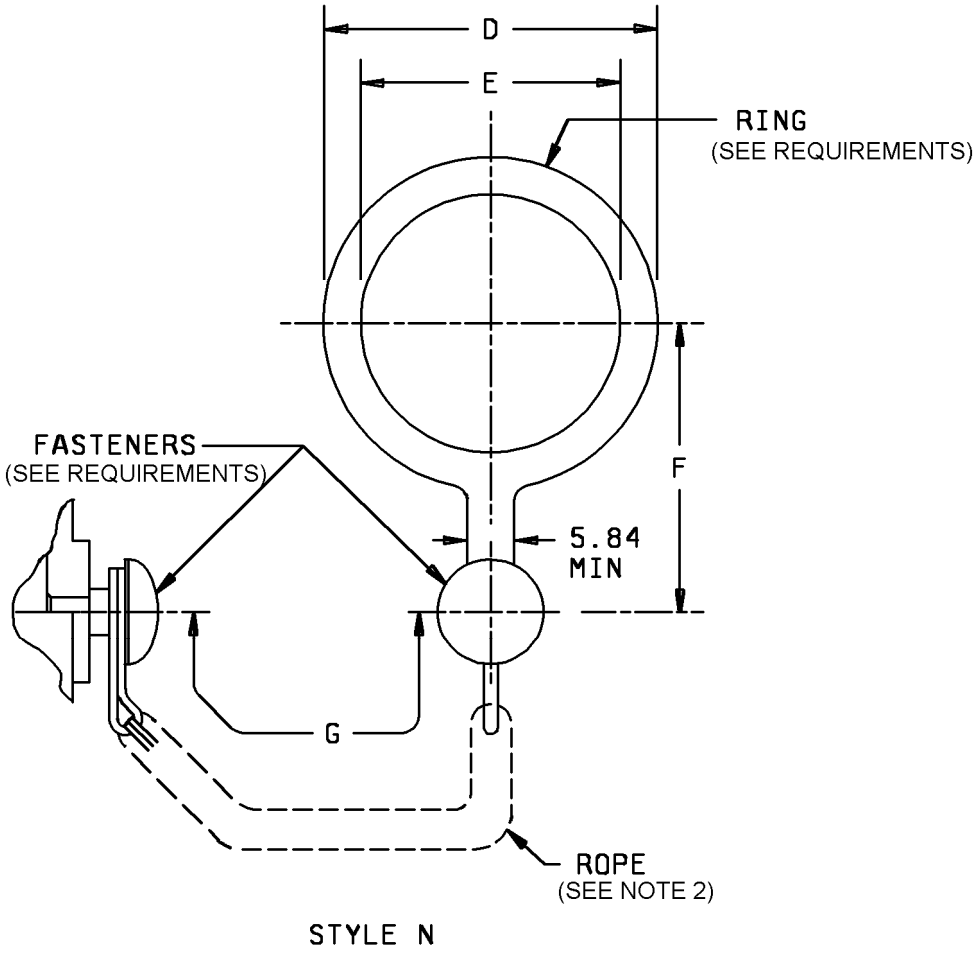


FIGURE 1. Protective cover, plug, all classes - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:49Z
Check the source to verify that this is the current version before use.

Dimensions							
Shell size	A THD-2B	B max dia	C dia + .00 - .15	D max dia	E min dia	F	G + 13.0 - 7.0
9	.6250-0.1P-0.3L-TS	23.0	12.50	24.0	13.0	24.00 14.50	127.00
11	.7500-0.1P-0.3L-TS	26.0	15.75	27.0	18.0	20.50 18.00	127.00
13	.8750-0.1P-0.3L-TS	31.0	19.53	30.0	20.0	27.00 20.00	127.00
15	1.0000-0.1P-0.3L-TS	33.0	22.71	31.0	23.0	22.50 18.00	127.00
17	1.1875-0.1P-0.3L-TS	37.0	25.88	37.0	26.0	30.50 23.50	127.00
19	1.2500-0.1P-0.3L-TS	40.0	28.55	40.0	29.0	31.50 25.00	127.00
21	1.3750-0.1P-0.3L-TS	44.0	31.72	44.0	32.0	33.00 26.50	127.00
23	1.5000-0.1P-0.3L-TS	46.0	34.90	46.0	34.0	34.00 27.50	127.00
25	1.6250-0.1P-0.3L-TS	50.0	38.07	49.0	39.0	38.00 30.00	127.00

NOTES:
1. Dimensions are in millimeters, except “A threads” which are in inches.
2. Method of attachment to cover and or ring is optional.

FIGURE 1. Protective cover, plug, all classes - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Materials:

Cover - Classes C, F, G, R, W, and X: Impact extruded or machined aluminum alloy.
Classes P, T and Z: Impact extruded or machined aluminum alloy.
Classes H, K, N, S and Y: Corrosion resistant steel.
Classes J and M: High performance resin in accordance with MIL-DTL-38999.
(Class F inactive for new design.)

Gasket - Silicone elastomer.

Ring - Corrosion resistant steel, passivated, 1.020 maximum thickness.

Rope - Insulated stainless steel, passivated. Insulation shall withstand 200°C environment.

Fastener - Stainless steel, passivated. Option: Aluminum integral to cover.

Mating connectors: MIL-DTL-38999, series III.

Gasket shall be bonded to cover, or mechanically retained.

Rope shall rotate freely on fastener.

Fastener tensile strength: The protective cover and rope assembly shall withstand a dead weight tensile load of 25 pounds applied to both axial and longitudinal directions. The load shall be applied at the end of the rope assembly and held for 5 minutes. There shall be no separation of the rope assembly from the protective cover or damage to the rope assembly. Both axial and longitudinal directions shall be 25 pounds. The load shall be applied to the end of the rope.

Qualifications. Qualifications shall be in accordance with MIL-DTL-38999 except only the following sequence of tests shall be required:

Examination of product
Coupling torque
Humidity
Salt spray (corrosion)
Fastener tensile strength (see requirement)
Altitude immersion.

For classes J and M only, temperature cycling and hydrolytic stability shall also be required.


Group A sampling inspection. Sampling for group A inspection as specified in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:49Z
Check the source to verify that this is the current version before use.

TABLE I. Group A sampling plan.

Lot size	Sampling size
1 to 13	100 percent
14 to 150	13 units
151 to 280	20 units
281 to 500	29 units
501 to 1,200	34 units
1,201 to 3,200	42 units
3,201 and up	54 units

Part or Identifying Number (PIN) example:

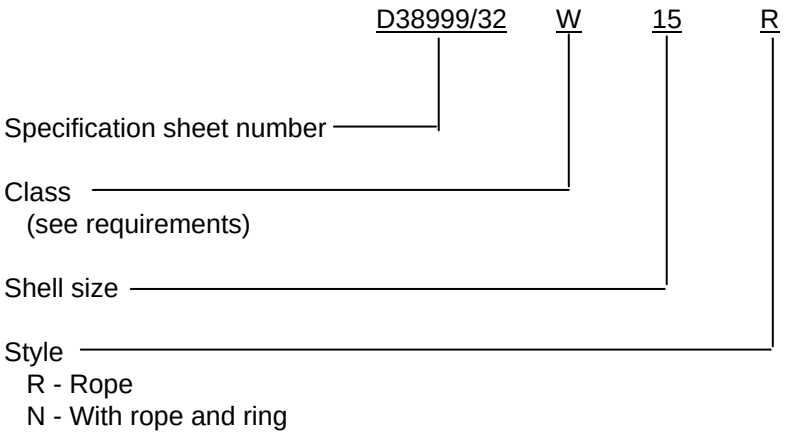

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

Referenced documents. This document references MIL-DTL-38999.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2007-138)

Review activities:
Army - MI
Navy - EC, MC, OS
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change. You should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:49Z
Check the source to verify that this is the current version before use.