MILITARY SPECIFICATION SHEET

CONNECTORS, RECEPTACLE ELECTRICAL CIRCULAR BREAKAWAY
JAMNUT MOUNTING REMOVABLE CRIMP CONTACTS SOCKETS
SERIES III SHELL SIZE 25 METRIC

This specification is approved for use by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-C-38999


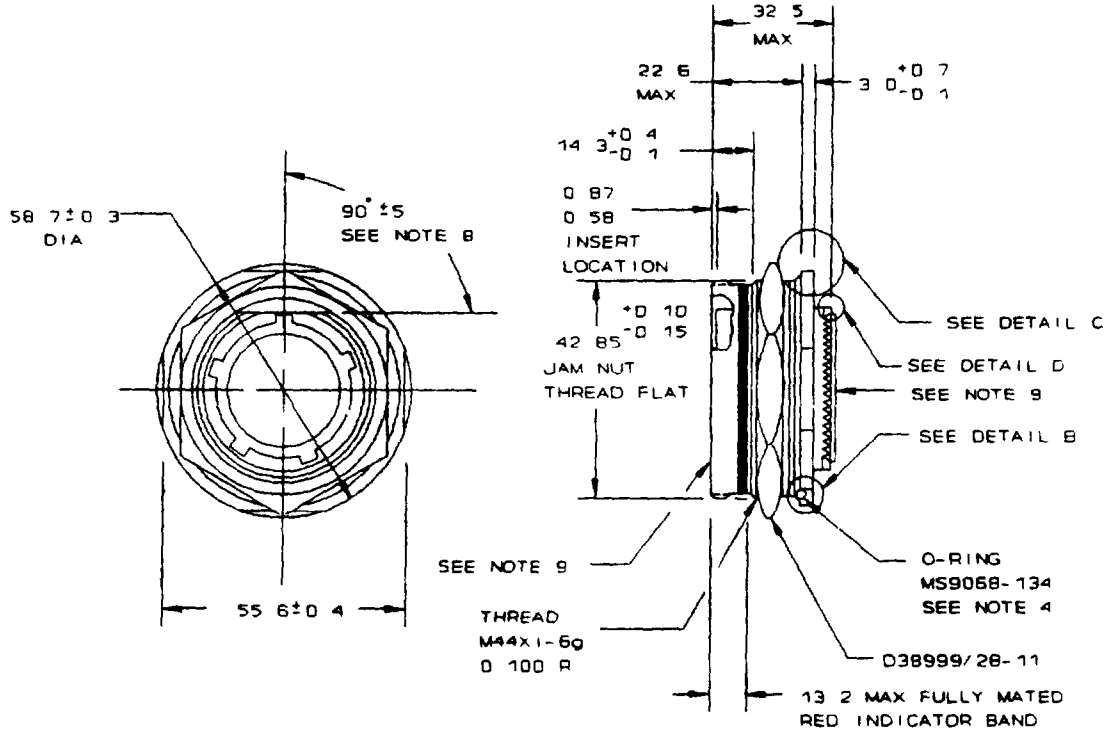


FIGURE 1 Receptacle, class W


(A) denotes change

DISTRIBUTION STATEMENT A Approved for public release distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:50Z
Check the source to verify that this is the current version before use.

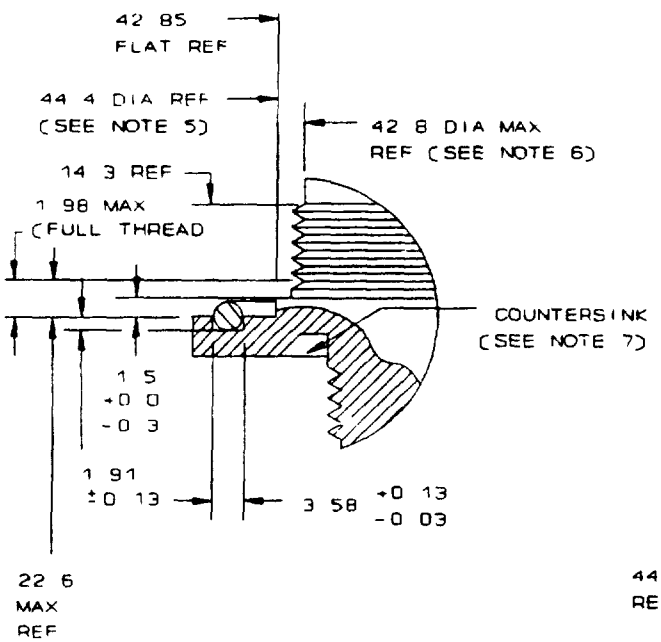


DETAIL B
SHOWN LESS HEX NUT

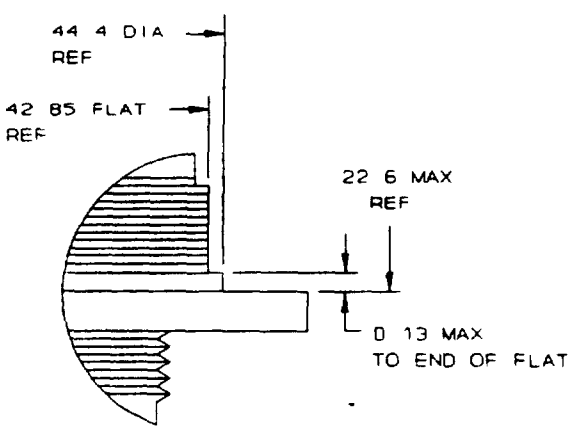

DETAIL C
SHOWN LESS O-RING
AND HEX NUT

FIGURE 1 Receptacle, class W - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:50Z
Check the source to verify that this is the current version before use.

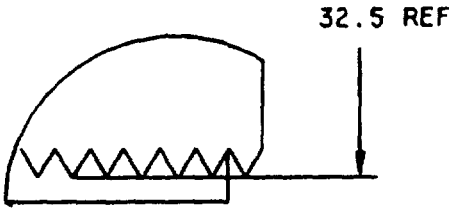

DETAIL D

DETAIL D

mm	Inches	mm	Inches	mm	Inches
0 03	0012	0 7	027	32 5	1 28
0 1	004	0 87	0343	42 8	1 685
0 10	004	1 50	0591	42 85	1 687
0 13	005	1 91	075	44 4	1 75
0 14	0055	1 98	078	55 6	2 19
0 15	006	3 0	12	58 7	2 31
0 2	007	3 58	141		
0 3	011	13 2	52		
0 4	015	14 3	562		
0 58	0229	22 6	89		

NOTES
1. Dimensions are in millimeters
2. Inch-pound equivalents are given for information only
3. Panel thickness 3 2 - 1 58 mm
4. Alternates O-ring material may be AMS 3325/3326
5. C and J dimensions define feature required for proper fit in type E panel
6. F diameter and P dimension defines G thread start
7. Countersink may be incorporated to accept accessory configuration in accordance with MIL-C-38999
8. B flat orientation
9. For details of connector front and rear configurations, see the procurement specification

FIGURE 1 Receptacle, class W - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:50Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See figure 1

Interface dimensions shall conform to MIL-C-38999

This receptacle is designed for use with lanyard release plug and mates with DOD-C-38999/29 /30 and /31 It is intended to be used only on stores

Insert arrangement See MIL-STD 1560

Separation force The receptacle shell shall break into two parts when a separation force is applied at any angle within 15° of the normal axis by the mating plug assembly Separation shall occur such that the plug assembly shall be pulled free of the receptacle insert and contacts shall remain secured in the mounted part

Part or Identifying Number (PIN) example D38999/ 34 W 20 A

Military prefix

Specification sheet number

Class

Insert arrangement

Polarizing position
N is required for normal position

(A) Qualification

Qualification is not required First article inspection shall be applied on each and every contract The first article inspection shall not be waived even for manufacturers who have previously received a first article inspection contract Contracts with renewal options shall impose first article test requirements at each renewal The bidder awarded the contract shall incur the costs of first article test

The first article test requirements are as specified in MIL-C-38999 paragraph 4 4 for each dash number with the following exceptions

Group I

Durability Wired connectors shall meet the durability requirements of MIL-C-38999 with the following exceptions

The total cycles of mating and unmating shall be 500 in the following sequence 200 cycles of normal mating and unmating, 50 cycles of normal mating with pull-separation unmating 200 cycles of normal mating and unmating and 50 cycles of normal mating with pull-separation unmating The lanyard release velocity during the pull-separation force unmating cycles shall be 9 15 meters per second

(A) Separation force Upon conclusion of the group I tests all samples shall be subjected to an axial force applied by a mated plug assembly The connector shall meet the requirements of separation force when the applied load is 1 800 ±200 newtons

External bending moment Wired connectors shall meet external bending moment requirements of MIL-C-38999 with the following exception Size 25 loading shall be 28 3 newton-meters

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:50Z
Check the source to verify that this is the current version before use.

Group II

Durability Wired connectors shall meet the durability requirements of MIL-C-38999 with the following exceptions

The total cycles of mating and unmating shall be 500 in the following sequence 200 cycles of normal mating and unmating 50 cycles of normal mating with pull-separation unmating 200 cycles of normal mating and unmating and 50 cycles of normal mating with pull-separation unmating The lanyard release velocity during the pull-separation force unmating cycles shall be 9 15 meters per second

Vibration Wired connectors shall meet the vibration requirements of MIL-C-38999 with the following exceptions

Sine vibration Connectors shall be subjected to the test specified in method 204 test condition G MIL-STD-202

Random vibration Connectors shall be subjected to the test specified in method 2005 of MIL-STD-1344 test condition VI letter J ambient temperature Duration shall be 8 hours in the longitudinal direction and in a perpendicular direction for a total of 16 hours

The preparing activity will define the accessory load and cable to be used in the random and sine vibration tests

(A) Separation force Upon conclusion of the group II tests all sampled shall be subjected to an axial force applied by a mated plug assembly The connector shall meet the requirements of separation force when the applied load is 1 800 ±200 newtons

External bending moment Wired connectors shall meet external bending moment requirements of MIL-C-38999 with the following exception Size 25 loading shall be 28 3 newton-meters

CONCLUDING MATERIAL

Custodian
Air Force - 85

Review activities
Air Force - 15 99

Preparing activity
DLA - ES

(Project 5935-F466)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:50Z
Check the source to verify that this is the current version before use.