This standard has been approved by the BUREAU OF NAVAL WEAPONS
Department of the NAVY and is mandatory for use by
that activity. All other military activities are required
to employ this standard where suitable.

P.A.
Other Cust

PROCUREMENT SPECIFICATION

SUPERSEDES:


TITLE

FLANGE, SWIVEL, HOSE FITTING
AMS 5639 CRES STEEL

MILITARY STANDARD

MS18076 (WP)

SHEET 1 OF 1

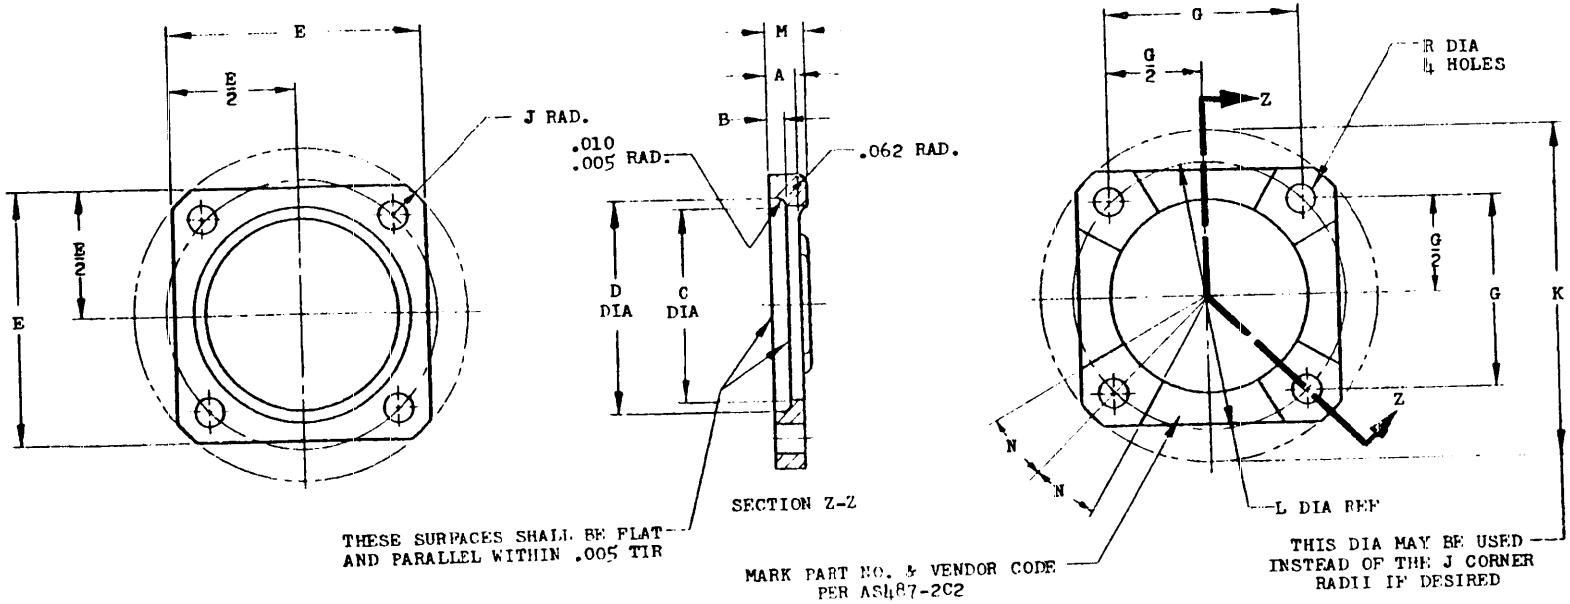

PART NO.	A +.015 -.005	B +.005 -.000	C +.010 -.000	D +.005 -.000	E		G	H +.010 -.000	J ±.010	K ±.015	L	M ±.010	N	WEIGHT MAX LBS
MS18076-08	.234	.136	.750	.885	1.390	±.016	.950	.205	.219	1.782	1.344	.297	20°	.054
MS18076-10			.880	1.010	1.468		1.038			1.906	1.468			.070
MS18076-12			1.125	1.260	1.594		1.156			2.094	1.635			.085
MS18076-16			1.375	1.510	1.750		1.312			2.312	1.855		18°	.089
MS18076-20			1.688	1.854	2.188	±.020	1.656	.266	.266	2.875	2.342		16°	.148
MS18076-24	.297	.168	1.938	2.135	2.375		1.812		.281	3.094	2.562	.359		.179
MS18076-32			2.562	2.760	3.000		2.375	.328	.312	3.953	3.359		12°	.288

NOTES:
1. ALL DIAMETERS MUST BE CONCENTRIC WITH EACH OTHER WITHIN .005 TIR.
2. BREAK SHARP EDGES .005-.015 AND REMOVE ALL BURRS.
3. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005, ANGLES ±1/2°.
4. REDUCTION BY FORGING DRAFT ANGLE OF 7° MAXIMUM IS PERMISSIBLE.
5. SURFACE ROUGHNESS: PER MIL-STD-10. UNLESS OTHERWISE SPECIFIED: MACHINED SURFACES 63 FORGED SURFACES 125
6. MATERIAL: CORROSION RESISTANT STEEL AMS 5639.
7. PASSIVATION: A.) DEGREASE.
   B.) IMMERSE FOR NOT LESS THAN 20 MINUTES IN A SOLUTION OF 1 VOLUME OF NITRIC ACID (SP GR 1.42) AND 9 VOLUMES OF WATER AT ROOM TEMPERATURE.

FED. SUP CLASS 5330

APPROVED 26 April 1965 REVISED

Source: https://assist.dla.mil -- Downloaded: 2026-02-23 14:14Z
Check the source to verify that this is the current version before use.