FED. SUP CLASS
6610

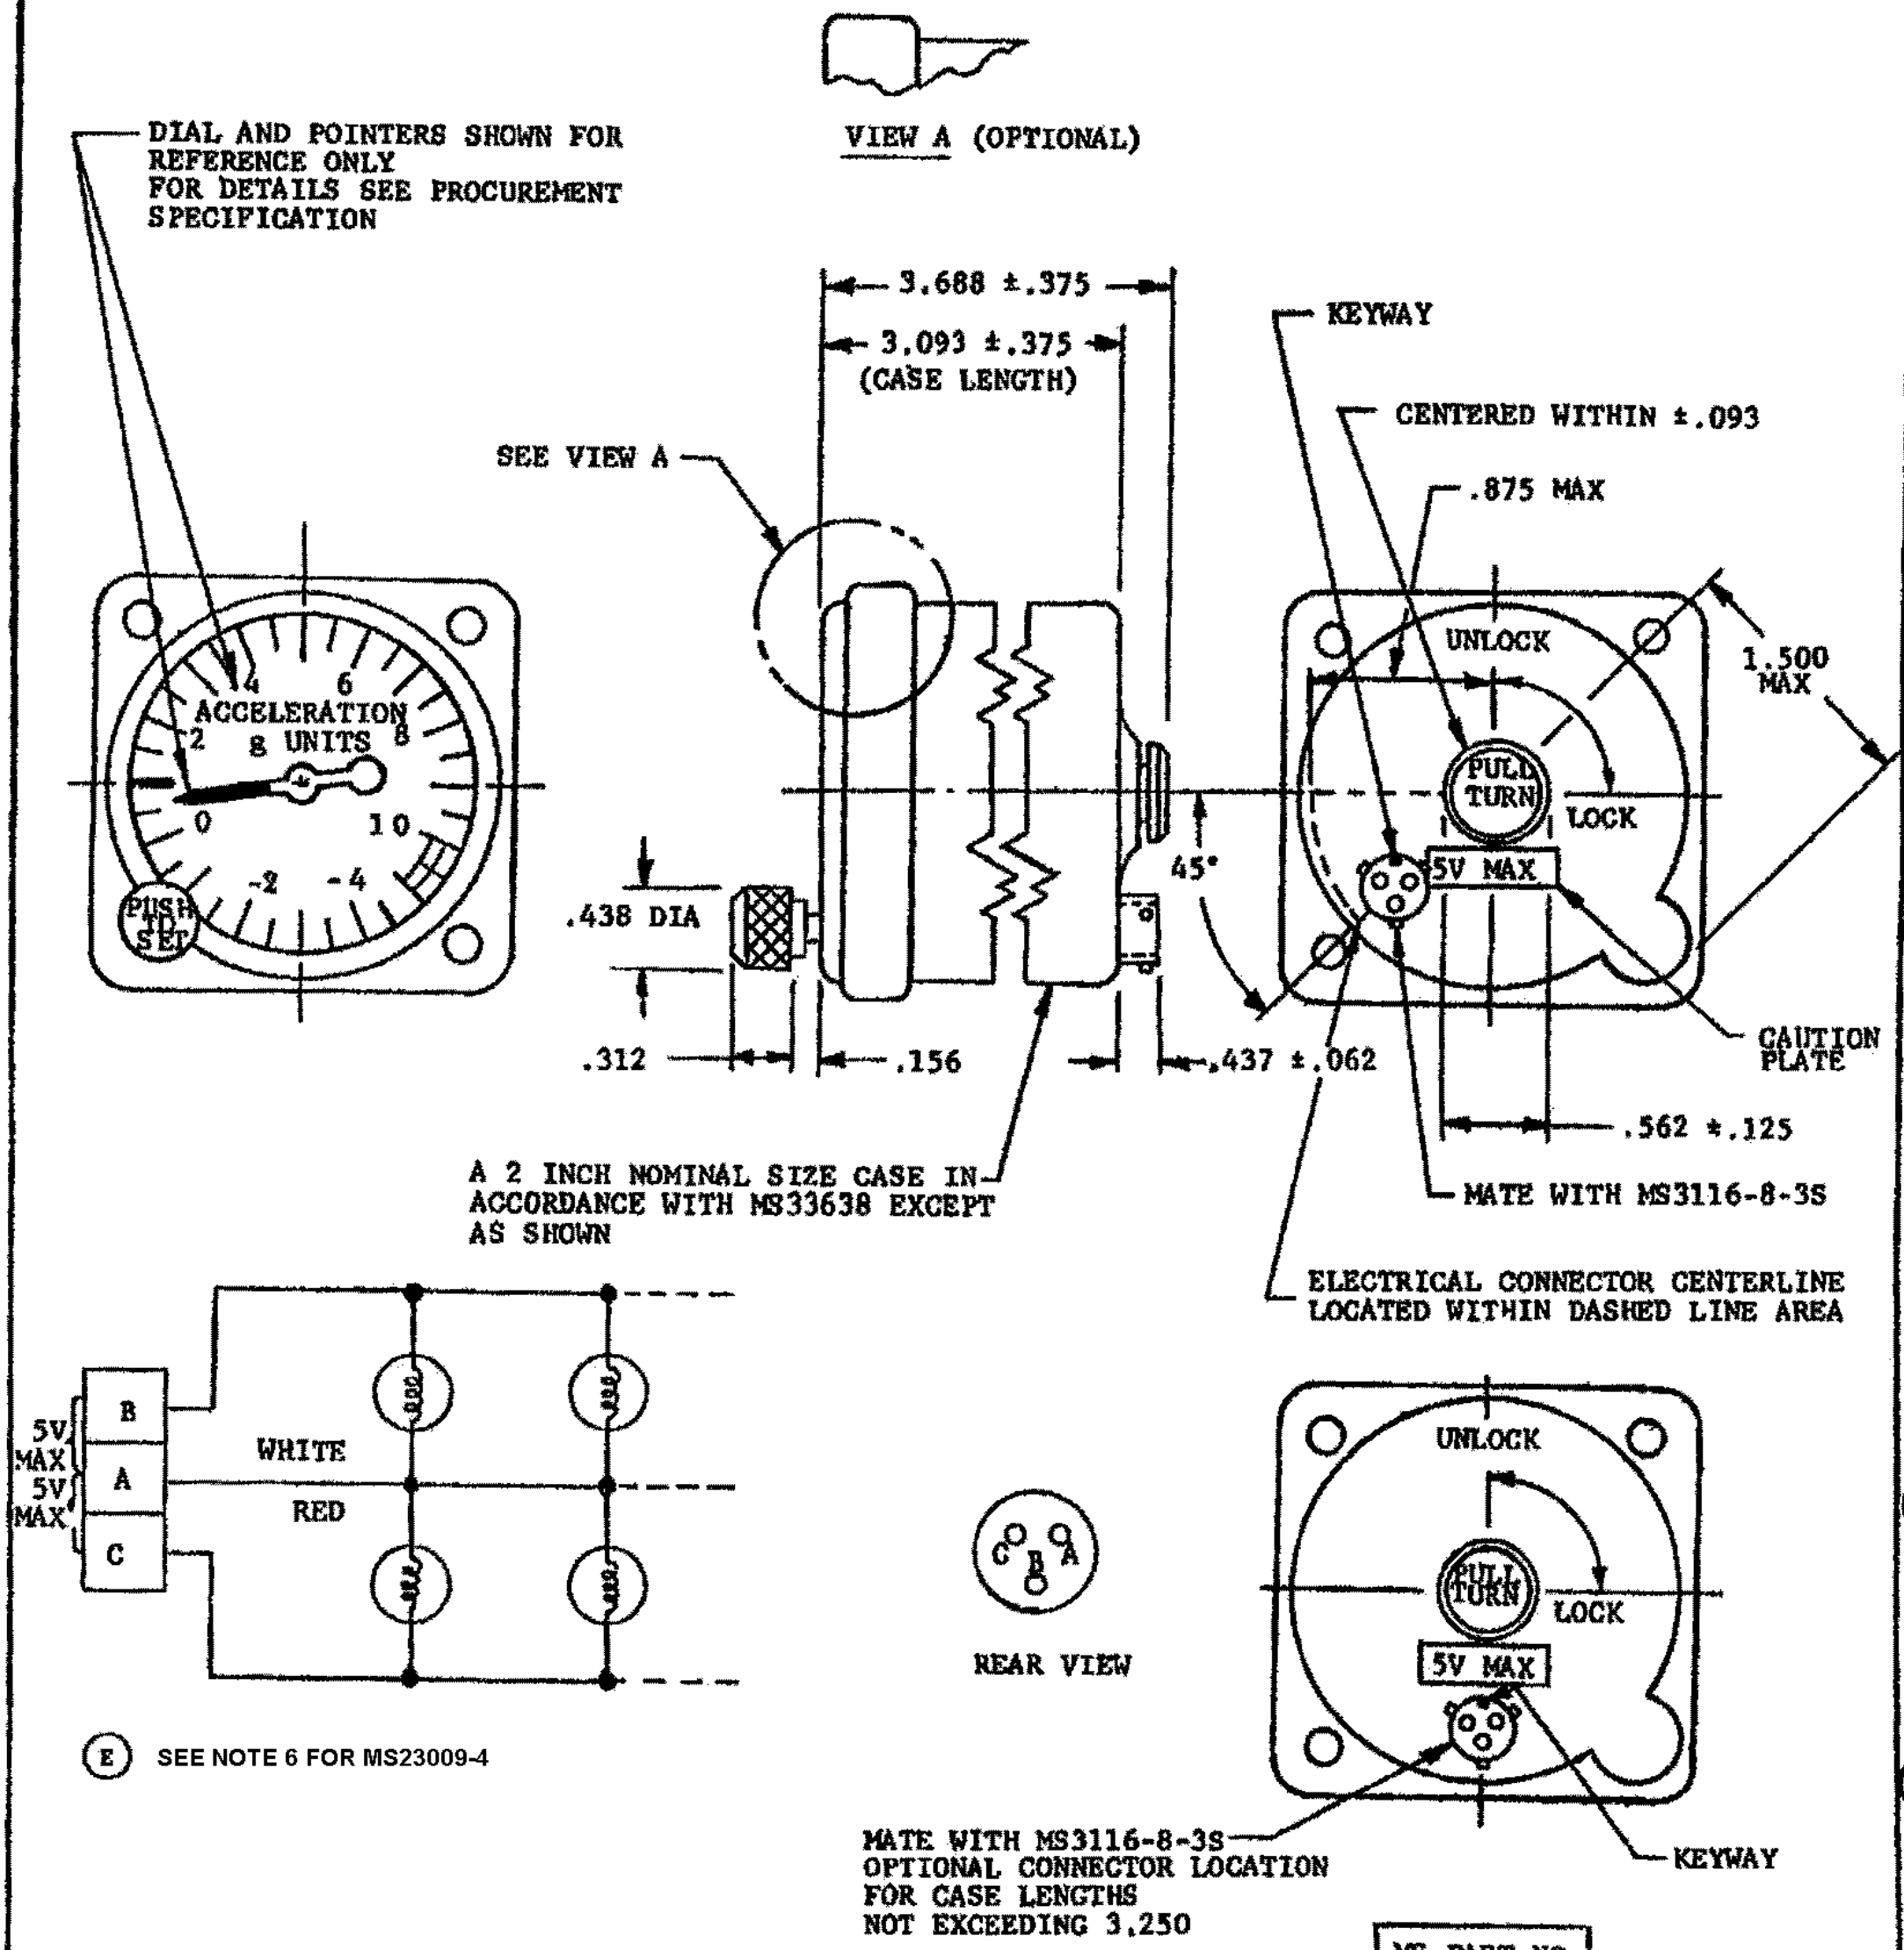
VIEW A (OPTIONAL)
DIAL AND POINTERS SHOWN FOR REFERENCE ONLY FOR DETAILS SEE PROCUREMENT SPECIFICATION
3.688 ±.375
3.093 ±.375 (CASE LENGTH)
SEE VIEW A
KEYWAY
CENTERED WITHIN ±.093
.875 MAX
1.500 MAX
UNLOCK
PULL TURN
LOCK
5V MAX
45°
CAUTION PLATE
ACCELERATION g UNITS
4
6
2
8
0
10
-2
-4
PUSH TO SET
.438 DIA
.312
.156
.437 ±.062
.562 ±.125
MATE WITH MS3116-8-3S
A 2 INCH NOMINAL SIZE CASE IN ACCORDANCE WITH MS33638 EXCEPT AS SHOWN
ELECTRICAL CONNECTOR CENTERLINE LOCATED WITHIN DASHED LINE AREA
5V MAX
5V MAX
B
A
C
WHITE
RED
C
B
A
REAR VIEW
UNLOCK
PULL TURN
LOCK
5V MAX
KEYWAY
MATE WITH MS3116-8-3S OPTIONAL CONNECTOR LOCATION FOR CASE LENGTHS NOT EXCEEDING 3.250

Ⓔ SEE NOTE 6 FOR MS23009-4

| MS PART NO. |
|---|
| ~~MS23009-1~~ |
| MS23009-2 |
| MS23009-3 |
| Ⓔ MS23009-4 |

MS23009-1 - INACTIVE FOR NEW DESIGN AFTER 9 APRIL 1969
USE MS23009-2 OR -3 FOR REPLACEMENT

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Ⓔ DENOTES CHANGES

APPROVED 22 JAN 64 REVISED Ⓓ 28 SEPT 79 ○ 30 OCTOBER 1987

USER SYMBOLS:

REVIEWER SYMBOLS:
USAF -

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

| | | | |
|---|---|---|---|
| P.A.<br>NAVY - AS<br>Other Cust<br>USAF - 99<br>Ⓔ | INTER-NATIONAL INTEREST<br>SEE NOTE 5 | TITLE<br>ACCELEROMETER-AIRCRAFT, INTEGRALLY LIGHTED ABU-4A/A AND ABU-4B/A | MILITARY STANDARD<br>MS23009 |
| PROCUREMENT SPECIFICATION<br>MIL-A-25949 | | SUPERSEDES: | SHEET 1 OF 2 |

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO. 22065

6610-0150
ENGINEERING SPECIFICATIONS AND STANDARDS DEPARTMENT
NAVAL AIR ENGINEERING CENTER
LAKEHURST, NEW JERSEY 08733

| | DATE |
|---|---|
| DRAWN BY | |
| TYPED BY | |
| CHECKED BY | |

NOTES TO PRINTER REDUCE BORDER TO 6-27/32x9-3/4. PRINT LEFT BORDER-LINE ONE INCH FROM LEFT EDGE OF 8x10-1/2 SHEET. PRINT BOTTOM BORDER LINE 3/8 INCH FROM BOTTOM EDGE OF 8x10-1/2 SHEET. SIGNATURE FORM NOT TO BE INCLUDED ON 8x10-1/2 SHEET.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:46Z
Check the source to verify that this is the current version before use.

USER SYMBOLS:

REVIEWER SYMBOLS:
USAF - 11, 99

"Review/user information is current as of the date of this document.
For future coordination of changes to this document, draft circulation
should be based on the information in the current DODISS."

This military standard is approved for use by all Departments
& Agencies of the Department of Defense. Selection for all new
engineering and design applications and for repetitive use shall
be made from this document

FED. SUP CLASS
6610

REQUIREMENTS:

1. MTG NOW: THE CONTRACTOR SHALL FURNISH SUFFICIENT MOUNTING SCREWS FOR INSTALLATION. THEY SHALL BE .138-32NC-2 ROUND HEAD BRASS MACHINE SCREWS, HAVING DURABLE DULL BLACK OXIDIZED OR BLACK NICKEL FINISH. THE LENGTH SHALL BE SUFFICIENT FOR MOUNTING ON A PANEL .188 THICK.

2. WEIGHT: NOT TO EXCEED 1.5 POUNDS.

3. ~~MS23009-1 -ABU 4/A, COVER GLASS COATED WITH ANTIREFLECTION COATING PER MIL-C-675, SEE PROCUREMENT SPEC.~~
MS23009-2 -ABU-4A/A, COVER GLASS COATED WITH MULTILAYER ANTIREFLECTION COATING OF HIGH EFFICIENCY. SEE PROCUREMENT SPEC.
MS23009-3 -ABU-4B/A, COVER GLASS COATED WITH REFLECTION REDUCING COATING, IN ACCORDANCE WITH MIL-C-14806. HERMETICALLY SEALED.

Ⓔ MS23009-4, COVER GLASS COATED WITH MULTILAYER ANTIREFLECTION COATING HIGH EFFICIENCY AND LIGHTED WITH NIGHT VISION IMAGING SYSTEM (NVIS) COMPATIBLE CLASS B NVIS GREEN A LIGHTING.

NOTES:

1. DIMENSIONS ARE IN INCHES.

2. TOLERANCES: DECIMAL ± .016, UNLESS OTHERWISE SPECIFIED.

3. REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

4. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

5. THE CONTENTS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENTS ASCC 10/4 AND STANAG 3330. WHEN AMENDMENT, REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIAN WILL INFORM RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICE FOR APPROPRIATE ACTION ON THE INTERNATIONAL AGREEMENTS CONCERNED.

Ⓔ 6. WHEN CLASS B NVIS GREEN A LIGHTING IS SPECIFIED, IT SHALL BE POWERED BY PINS A AND B. PIN C SHALL BE LEFT OPEN.

APPROVED 22 JAN 64 REVISED Ⓔ FOR CHANGES SEE SHEETS 1 & 2

| | | | |
|---|---|---|---|
| P.A.<br>NAVY - AS<br>Other Cust<br>USAF - 99<br>Ⓔ | INTER-NATIONAL INTEREST SEE NOTE 5 | TITLE<br>ACCELEROMETER-AIRCRAFT, INTEGRALLY LIGHTED<br>ABU-4A/A AND ABU-4B/A | MILITARY STANDARD<br>MS 23009 |
| PROCUREMENT SPECIFICATION<br>MIL-A-25949 | | SUPERSEDES: | SHEET 2 OF 2 |

DD FORM 1 MAR 72 672-1 *(Coordinated)* PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO. 23065

ENGINEERING SPECIFICATIONS
AND STANDARDS DEPARTMENT
NAVAL AIR ENGINEERING CENTER
LAKEHURST, NEW JERSEY 08733

DATE

DRAWN BY

TYPED BY

CHECKED BY

NOTES TO PRINTER REDUCE BORDER TO 6-27/32x8-3/4. PRINT LEFT BORDER-LINE ONE INCH FROM LEFT EDGE OF 8x10-1/2 SHEET. PRINT BOTTOM BORDER LINE 3/8 INCH FROM BOTTOM EDGE OF 8x10-1/2 SHEET. SIGNATURE FORM NOT TO BE INCLUDED ON 8x10-1/2 SHEET.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:46Z
Check the source to verify that this is the current version before use.