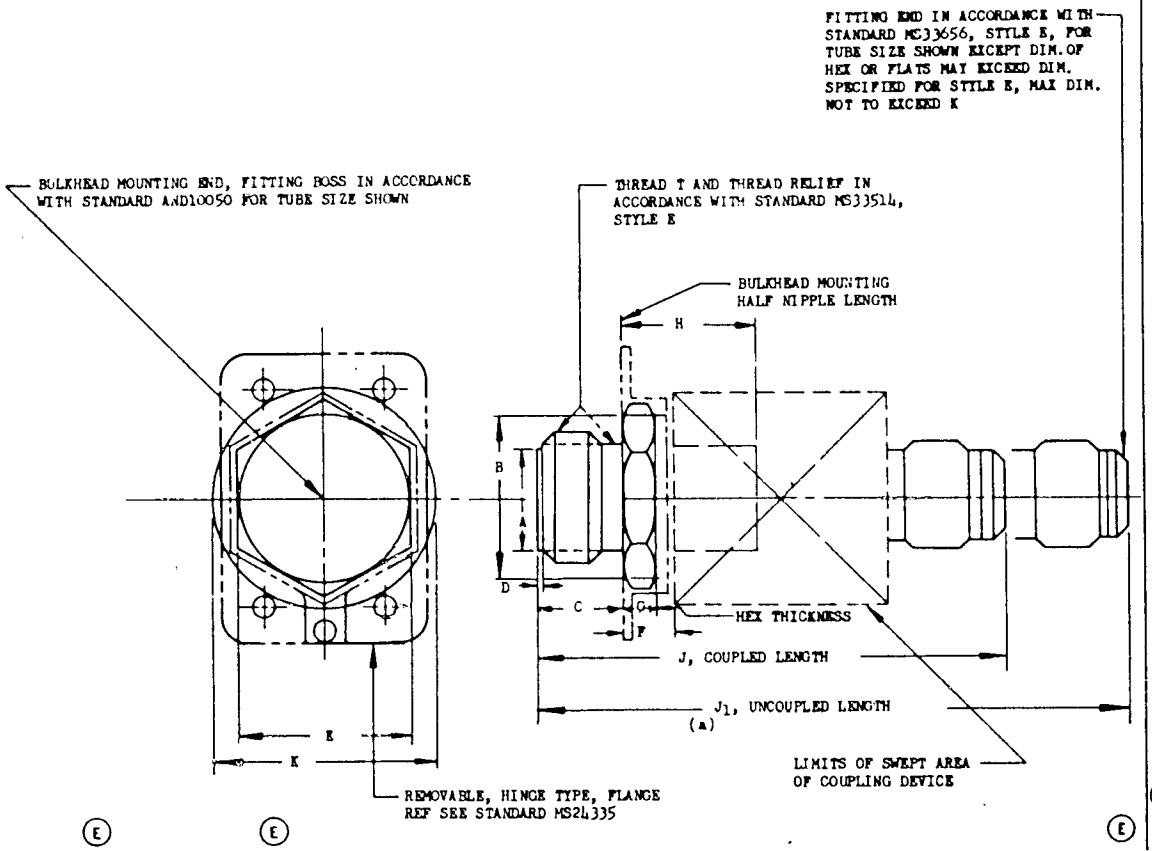



| DASH NO. | TUBE OD INCH | THREAD T MIL-S-8879 | A DIA ±.015 | B DIA MAX | C ±.010 | D ±.010 | E | | F MIN | G +.016 -.000 | H MAX | J +.032 -.062 | $J_1$ MAX | K IIIA MAX |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| -4 | 1/4 | .8750-14 UNJF-3A | .750 | 1.000 | .594 | .030 | 1.125 | +.003 -.004 | .375 | .250 | 1.384 | 3.175 | 3.769 | 1.625 |
| -6 | 3/8 | 1.0625-12 UNJ-3A | .875 | 1.250 | | | 1.375 | | | | 1.910 | 3.566 | 4.222 | 1.812 |
| -8 | 1/2 | 1.3125-12 UNJ-3A | 1.063 | 1.500 | .718 | | 1.625 | ±.016 | | | 1.348 | 3.990 | 4.659 | 1.937 |
| -10 | 5/8 | | 1.125 | 1.594 | .781 | | | | | | 1.938 | 4.640 | 5.515 | 2.125 |
| -12 | 3/4 | 1.6250-12 UNJ-3A | 1.438 | 1.750 | .906 | .062 | 1.875 | ±.020 | .438 | .312 | 2.200 | 4.919 | 5.753 | 2.375 |
| -16 | 1 | 1.8750-12 UNJ-3A | 1.687 | 2.000 | .938 | .093 | 2.125 | | | | 2.503 | 5.827 | 6.847 | 2.625 |
| -20 | 1-1/4 | 2.5000-12 UNJ-3A | 2.000 | 2.375 | .984 | .125 | 2.750 | | .500 | | 2.900 | 6.727 | 7.897 | 2.875 |

(a) INDICATES COMPLETE SEPARATION OF COUPLING HALVES, ALLOWING LATERAL DISPLACEMENT WITHOUT INTERFERENCE BETWEEN COUPLING HALVES.

MATERIAL: SEE PROCUREMENT SPECIFICATION.
FINISH: SEE PROCUREMENT SPECIFICATION.
PRESSURE RATING: SEE PROCUREMENT SPECIFICATION.

NOTES:
1. DIMENSIONS ARE IN INCHES.
2. EXAMPLE OF PART NO.: MS24333-X-4
   - 4 — DASH SIZE
   - X — MANUFACTURER'S IDENTIFICATION LETTER ASSIGNED BY QUALIFYING ACTIVITY.
   - MS24333 — BASIC MILITARY STANDARD NO.
3. THE ASSEMBLY DOES NOT INCLUDE FLANGE STANDARD MS24335.
4. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
5. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

(E) DENOTE CHANGES

| | | |
|---|---|---|
| P.A. Navy - AS (E)<br>Other Cust<br>USAF - 99<br>ARMY - AV | TITLE<br>COUPLING ASSEMBLY, HYDRAULIC, SELF-SEALING, QUICK DISCONNECT, FLARED FITTING TO INTERNAL THREAD BOSS | MILITARY STANDARD<br>MS24333 (E)<br>SHEET 1 OF 1 |
| PROCUREMENT SPECIFICATION<br>MIL-C-25427 | SUPERSEDES:<br>MS24333 (ASG) | ☆ U.S. GOVERNMENT PRINTING OFFICE: 1988-301-529/6348 |

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PROJECT NO. 4730-1002

AMSC N/A

Review activities: DLA - CS, NAVY - AS, USAF - 82, ARMY - AV

APPROVED 23 Jul 56 REVISED (A) 12 Aug 57 (B) 7 Nov 57 (C) 9 Nov 61 (D) 10 May 68 (E) 26 OCT 87

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.
This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repository use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:52Z
Check the source to verify that this is the current version before use.